



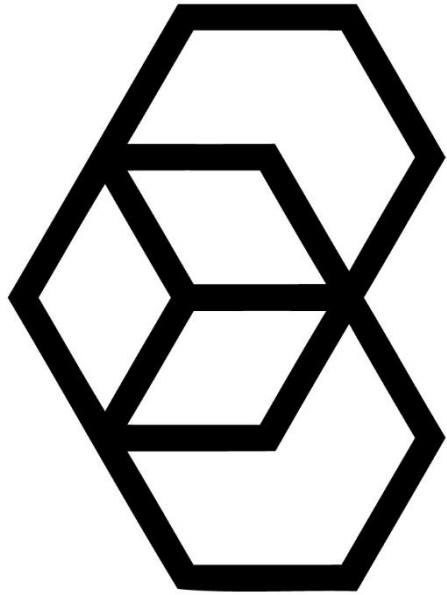

COMLED


Architectural Downlights and Spotlights

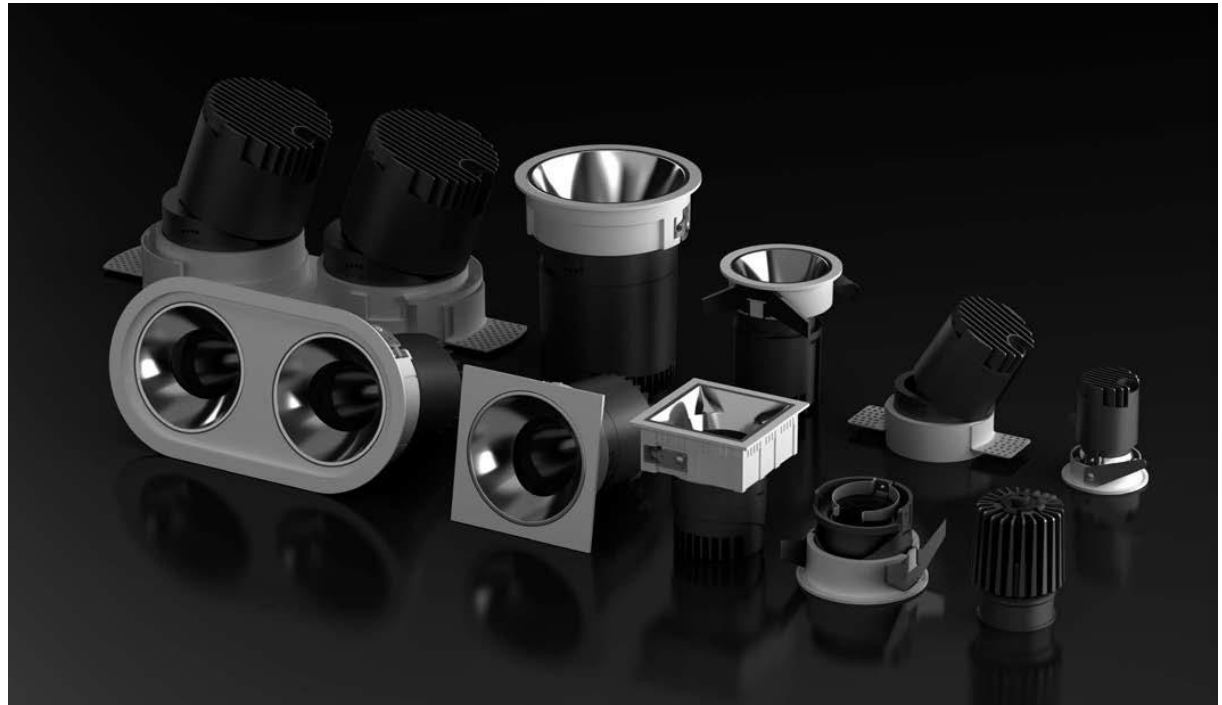

Lighting is our passion as the best lighting solution only adds to the creative space or to the occupants' visual enjoyments of that space occupied. Excellent lighting leads to the subconscious feeling of happiness. By contrast a poor lighting solution can promote the opposite. By taking care in luminaire selection your designed space will benefit all how use the area and even those who simply pass through.

About


Our range of COMLED luminaires extends from the humble downlight, to aluminium extruded luminaires for suspension, surface or recessed installation in either straight, curved or round, flexible and fixed round 360° LED tube with diameters of up to 50mm, wall lights, along with exterior lighting solutions. Residential, commercial, hospitality, aged care, retail, parks & gardens..... we can also offer custom solutions to suit your project requirements.

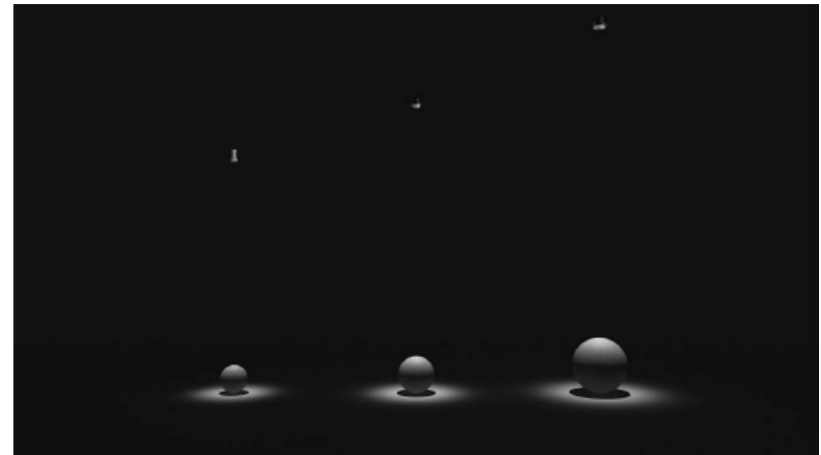

Service

Successful solutions are not only based on excellent products, but on the "customer-centric" principle of service. Working hand in hand to develop the best solution for your needs whether that is to add subtle illumination or the creation of features to add to the space, we can be guided by your ideas and concepts or we can work creatively so find that ideal solution.



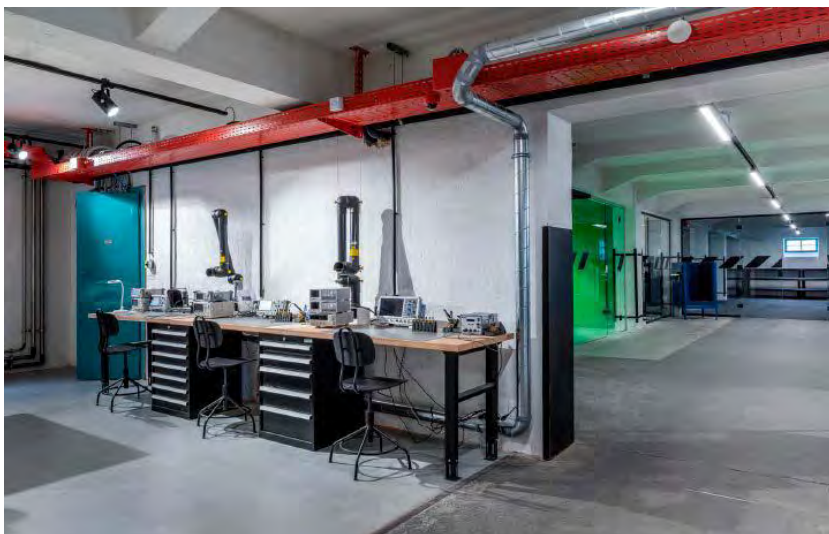

Technology

We have accumulated a vast amount lighting and manufacturing knowledge over the years and incorporating this experience with our partners to offer the latest LED and highest quality of solutions is paramount to us so that you can benefit from this. optimized production for PCB assembly and high-end ESD (electro-static discharge) assembly areas, right up to extensive testing of the finished product, everything is set out to achieve the highest manufacturing quality; for the fully developed and high-quality manufactured luminaire.



Quality

COMLED luminaires are manufactured to meet the most exacting requirements. Using the latest product development, production and testing processes in the modern laboratories, combined with full certification to ISO 9001 and ISO 14001, ensures high-quality products with a long service life. Our component partners, both LED and drivers, are well known and respected within the illumination industry which provides comfort and peace of mind for excellent performance and service life.



CONTENTS

LINAN

				
6W	6W	6W	6W	6W
				
2x6W	3x6W	4x6W	6W	2x6W
				
3x6W	4x6W	12W	12W	12W
				
12W	12W	12W	2x12W	2x12W
				
2x12W	2x12W	12W	2x12W	12W

CONTENTS

LINAN

				
20W	20W	20W	20W	2x20W
				
2x20W	2x20W	2x20W	30W	30W
				
30W	30W(开孔 150)	2x30W	2x30W	
				
MR16	MR16	MR16	MR16	MR16

CONTENTS

TIANYUE

NEW



DRE02



DSE02



DRT02



DST02



DST02-2



DSE02-2



DRE04



DSE04



DRT04



DST04




PRE04



PSE04



PRT04



PST04



PST04-2



PSE04-2



PRE04



PSE04



PRT04



PST04




FRE02



FSE02



FRT02



FST02



FST02-2

CONTENTS

TIANYUE

NEW



FSE04-2



FRE04



FSE04



FRT04



FST04



DRS02



DSS02



PRS02



PSS02



FRS02



FSS02



DRS02-K



DSS02-K



PRS02-K



PSS02-K



FRS02-K



FSS02-K

NICE

NEW



6W



12W

LEO



10W/15W



10W/15W

CONTENTS

LINA

NEW



2X6W



3X6W



3X6W



12W



12W



6W



12W



6W



6W



6W



6W



6W



6W



6W

LORI




10W/20W/30W



10W/15W/20W/30W



10W/15W/20W/25W



10W/15W/20W



40W



CREE

- Reflector cover 6 colors are optional to meet the needs of different occasions.
- Family design - full range of spotlights, different needs and different choices, face rings can choose a variety of styles.
- Suitable for high-end hotels, villas clubs, high-end residential, for your business life to provide a more comfortable and healthy lighting space.

Dark light technology


Deep reflection cup, UGR < 16, lengthen the distance between light source and light outlet, improve the anti-glare performance. The light is filtered by the reflecting cup and the anti-glare honeycomb to effectively reduce the excess light beam.

- 1

Deep reflective cup, providing anti-glare performance.
- 2

Honeycomb Mesh, Effectively Prevent Excess Astigmatism.
- 3


Die-casting aluminium radiator with higher heat dissipation efficiency.

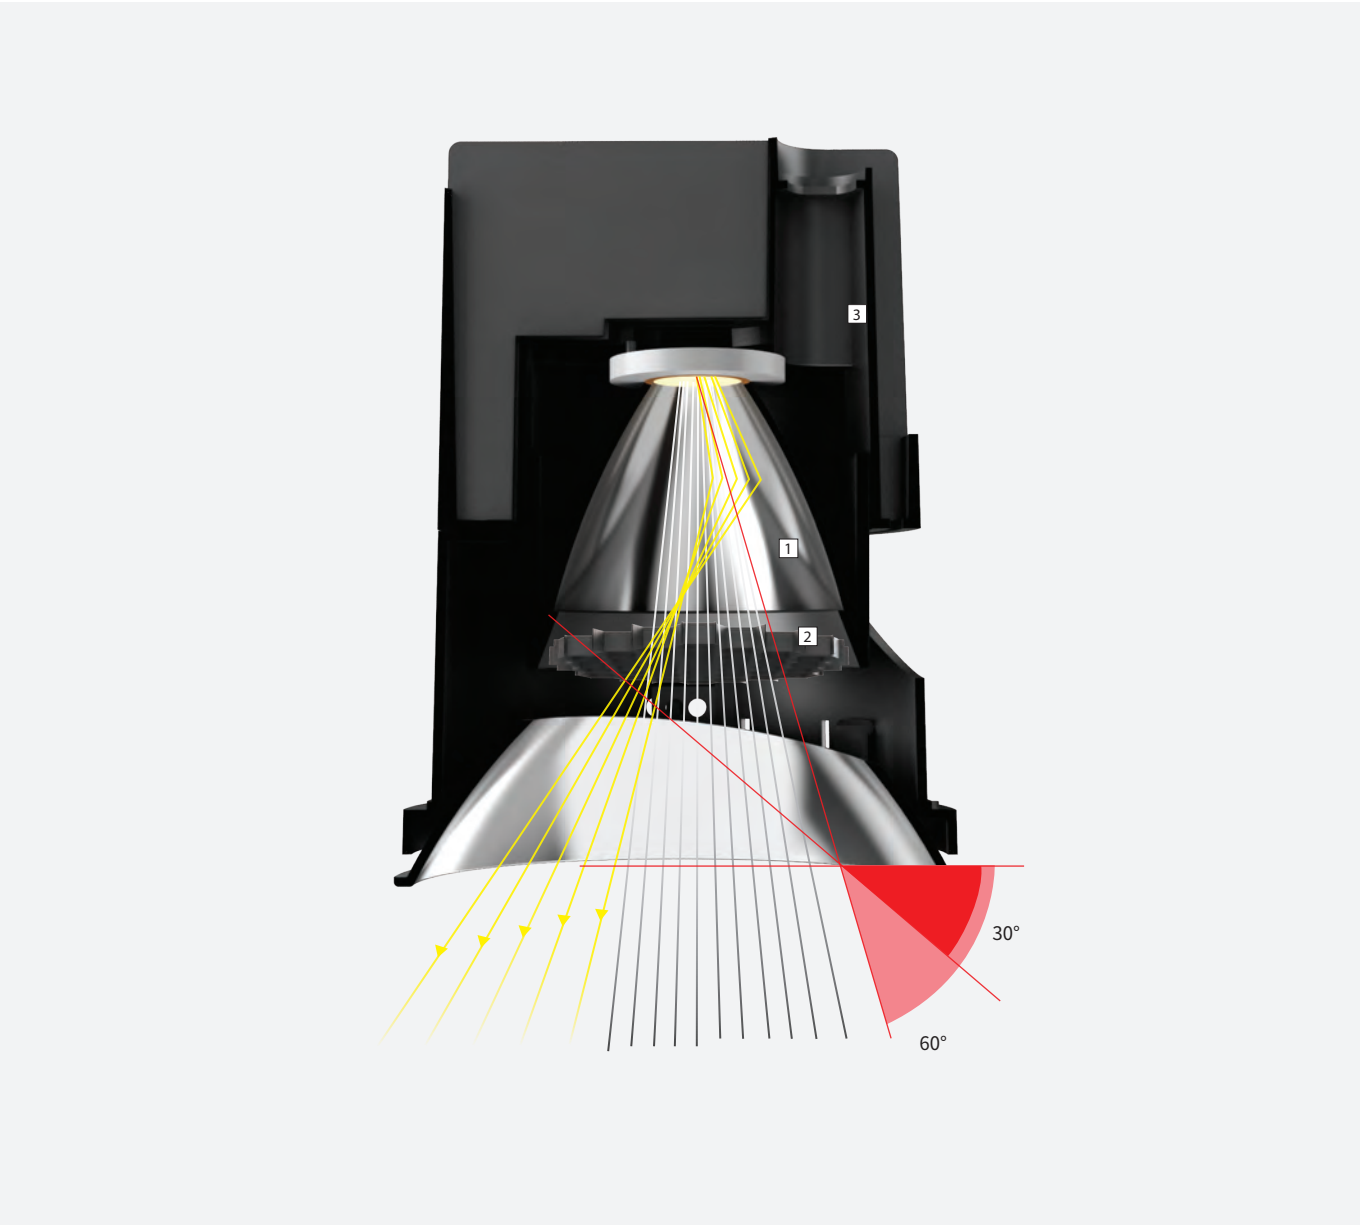

LINAN




REFLECTORS IN DIFFERENT COLOR

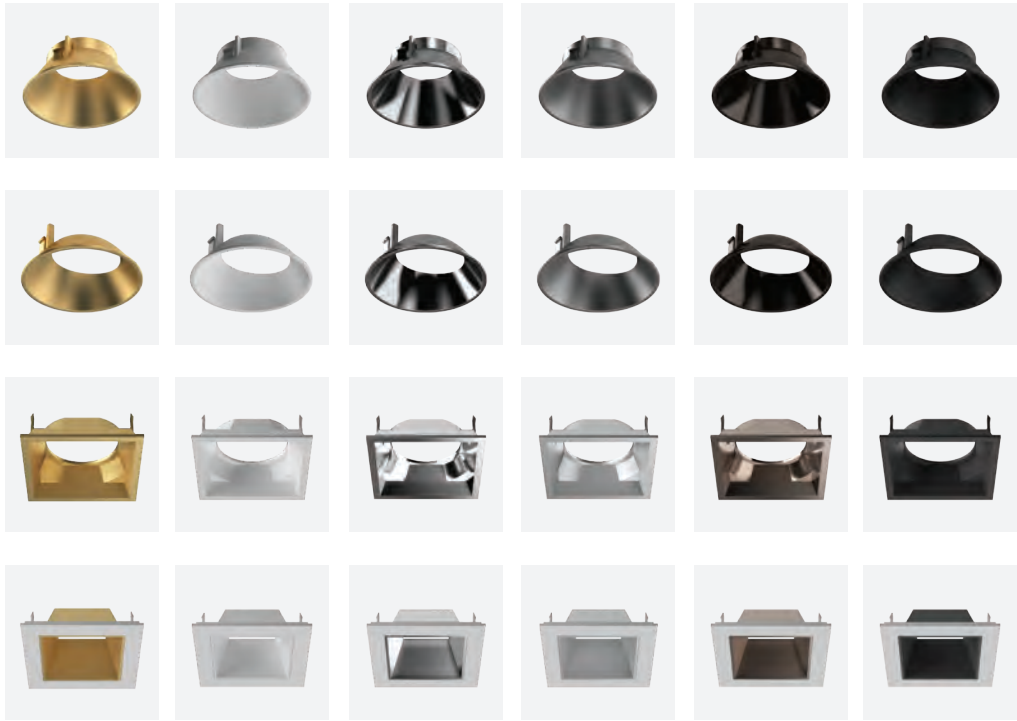

Sand gold White Chrome Silver Pearl Black Black

Modularization Design

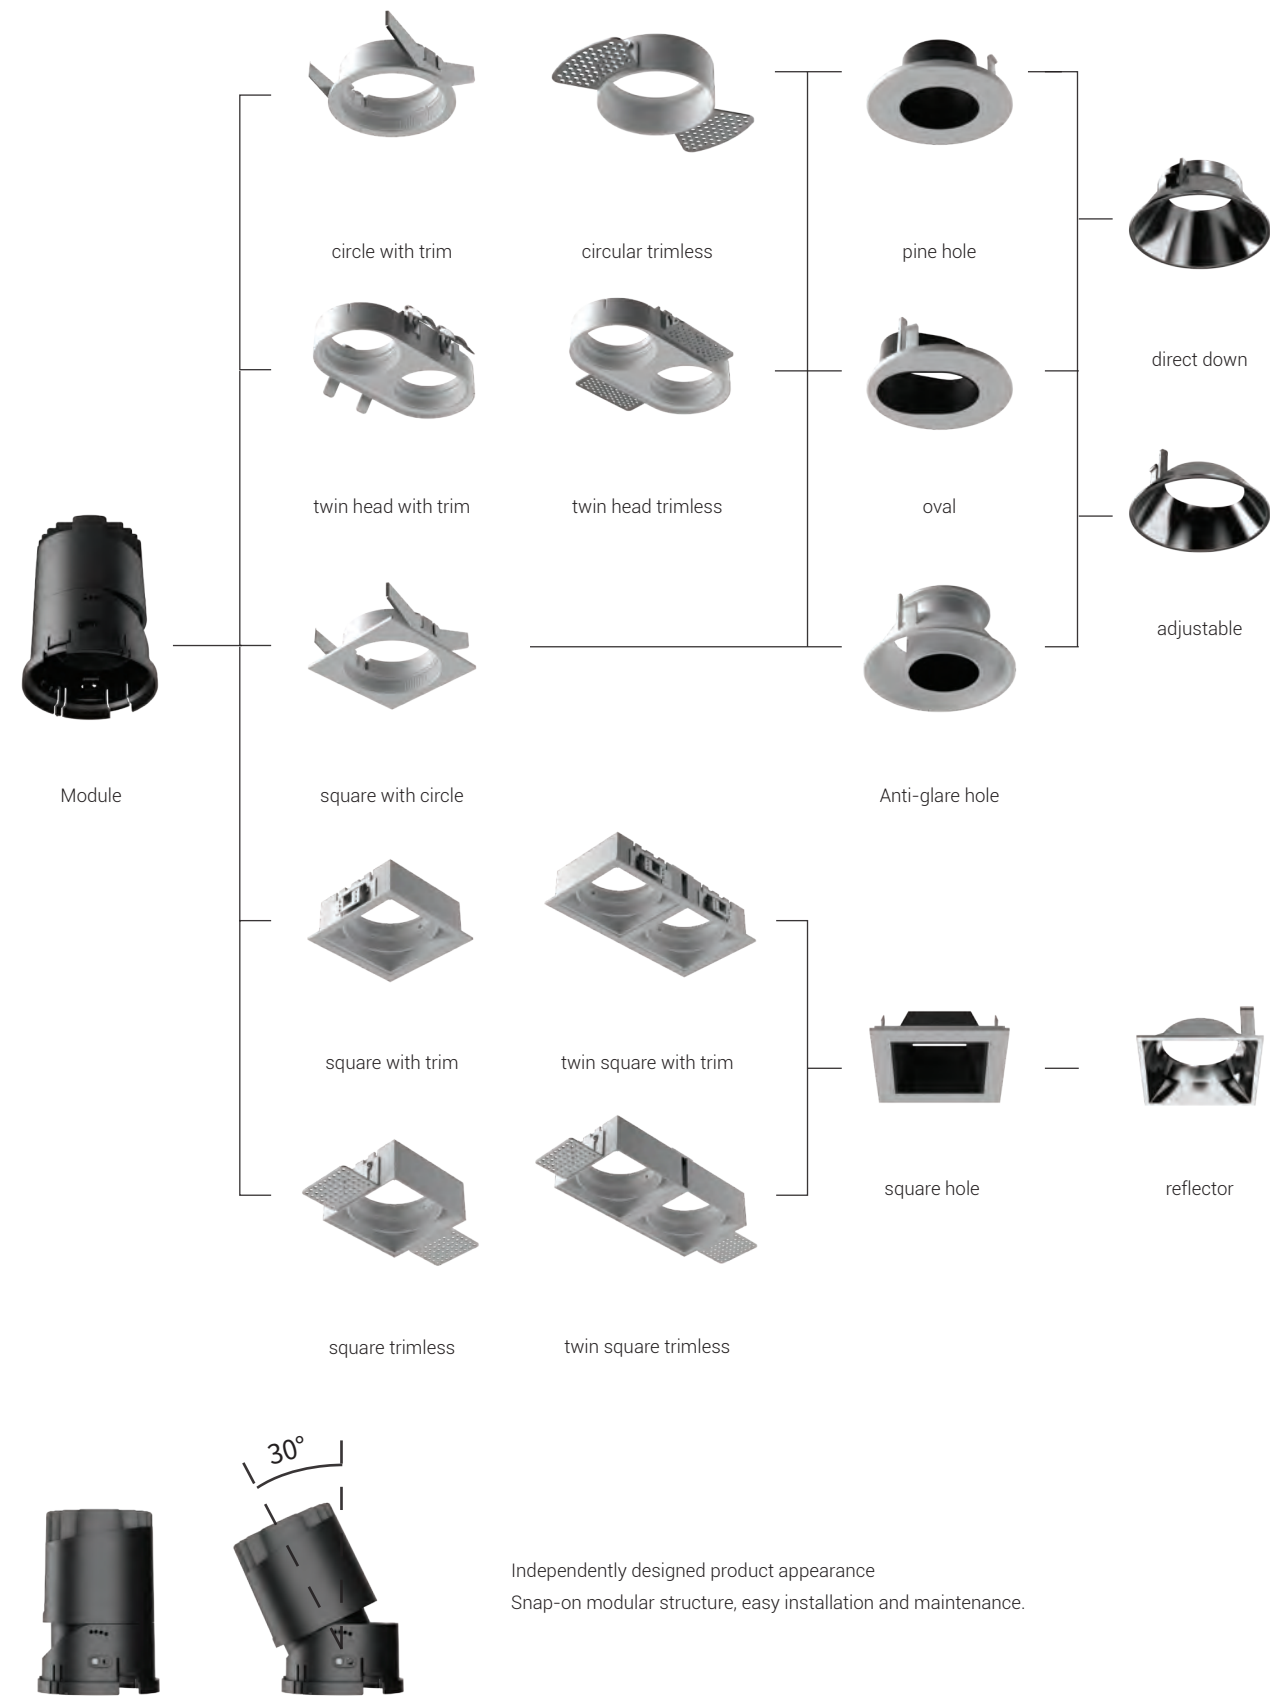

SPOTLIGHT



Family design

According to lighting effect and facial rings, various styles and light effects can be selected.
Each kind of facial ring has its own unique light effect.



Multiple Installation Structures

Reasonable installation structure can keep smallpox simple, natural and visual consistency.



1 75mm aperture specifications have lens options, the whole lamp height is smaller, more suitable for low ceiling space scenarios.

2 Independently designed product appearance, Fastener modular structure, easy installation and maintenance

3 Reflector cover is precisely designed, electroplated and nano-sprayed. It has high reflection efficiency and provides comfortable light with high efficiency.




2-30mm


Quickly tighten the screws for easy installation.
Suitable for all ceiling thicknesses up to 30mm.

Luminous efficiency

The lamp head can be rotated freely in all directions.
Let the light move with the heart and maximize the value of light.

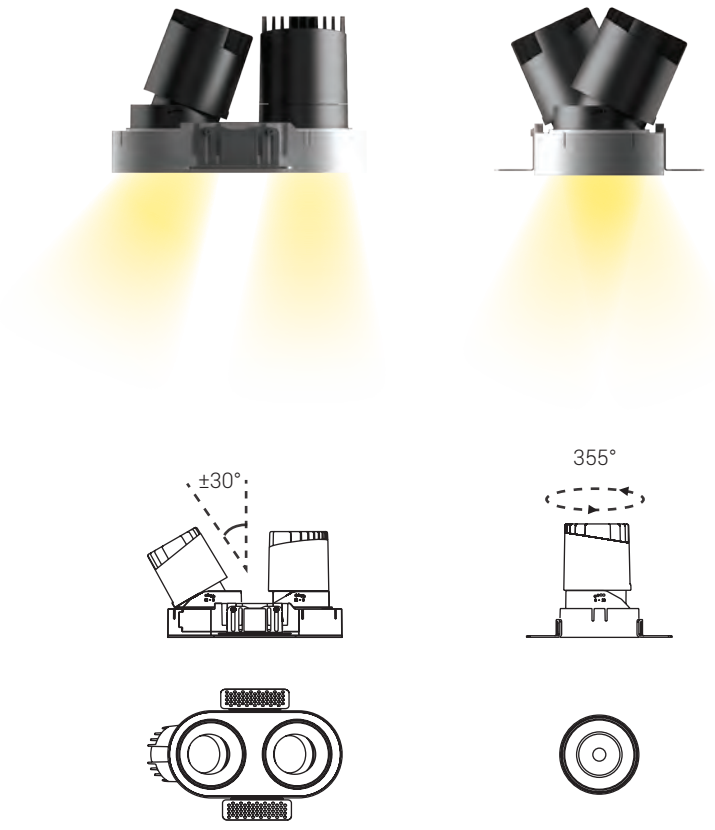

Infinite splicing of square boxes

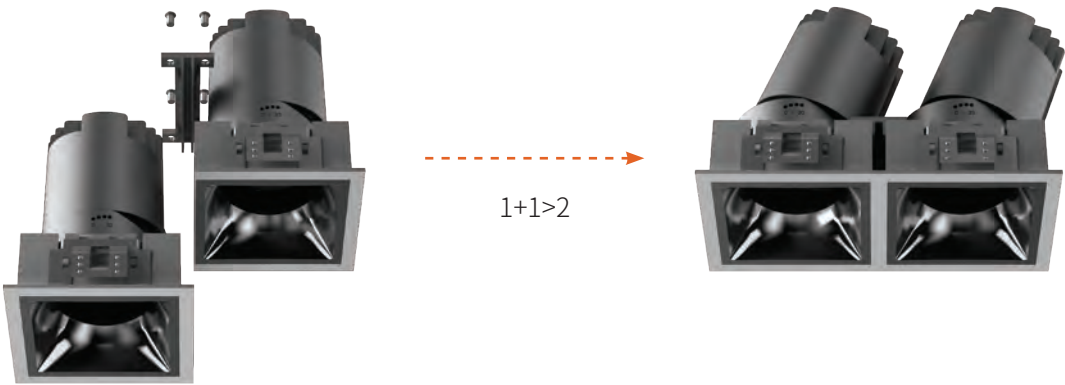

Free combination

Freely stitching like Tetris providing enough illumination for high-rise spaces
Square frame provides flexible lighting.



MR16- 模组化结构



10W module 15W module MR16 light source



MR16 circle



MR16 circle trimless



MR16 twin circle



MR16 twin circle trimless



MR16 square



MR16 square trimless



MR16 twin square



MR16 twin square trimless



Matching MR16

Can be combined with different light source modules, different combination.

LINAN
6W



Colour:

Sand gold

Pearl Black

Black

White


Silver

Chrome

Optional :

Honey comb

Stripe



CM-100301E50 / 100302E50 / 100303E50 / 100304E50


Model Code	100301E50	100302E50	100303E50	100304E50
Power	6W	6W	6W	6W
Cut out	Φ50mm	Φ50mm	Φ50mm	Φ50mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	Φ60x75mm	Φ60x78mm	Φ60x75mm	Φ60x78mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	308 lm/338 lm/354 lm/376 lm	308 lm/338 lm/354 lm/376 lm	283 lm/312 lm/326 lm/346 lm	283 lm/312 lm/326 lm/346 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 6W 3000K

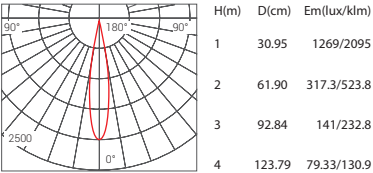

Beam Angle 24° 6W 3000K

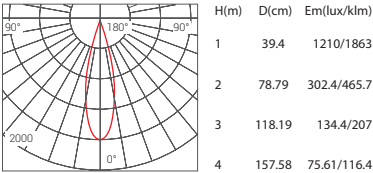

Beam Angle 38° 6W 3000K

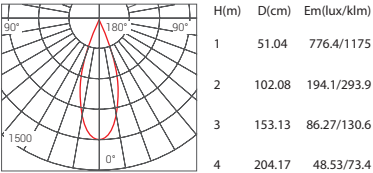

SPOTLIGHT



Colour:

Sand gold

Pearl Black

Black

White


Silver

Chrome

Optional :

Honey comb

Stripe

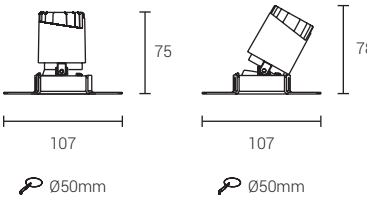

CM-100301T50 / 100302T50 / 100303T50 / 100304T50


Model Code	100301T50	100302T50	100303T50	100304T50
Power	6W	6W	6W	6W
Cut out	Φ50mm	Φ50mm	Φ50mm	Φ50mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	107x75mm	107x78mm	107x75mm	107x78mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	308 lm/338 lm/354 lm/376 lm	308 lm/338 lm/354 lm/376 lm	283 lm/312 lm/326 lm/346 lm	283 lm/312 lm/326 lm/346 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 6W 3000K

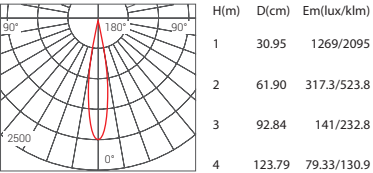

Beam Angle 24° 6W 3000K

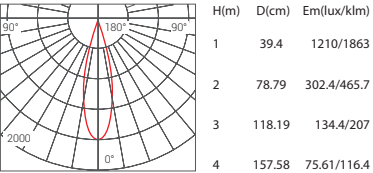

Beam Angle 38° 6W 3000K

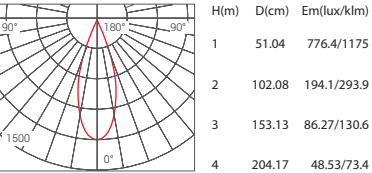


LINAN
6W



Colour:  Sand gold  Pearl Black  Black  White  Silver  Chrome

Optional :  Honey comb  Stripe



CM-100301P50 / 100302P50 / 100303P50 / 100304P50


Model Code	100301P50	100302P50	100303P50	100304P50
Power	6W	6W	6W	6W
Cut out	Φ50mm	Φ50mm	Φ50mm	Φ50mm
Light Source	CREE	CREE	CREE	CREE
Size(LxWxH)	60x60x75mm	60x60x78mm	60x60x75mm	60x60x78mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	308 lm/338 lm/354 lm/376 lm	308 lm/338 lm/354 lm/376 lm	283 lm/312 lm/326 lm/346 lm	283 lm/312 lm/326 lm/346 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 6W 3000K

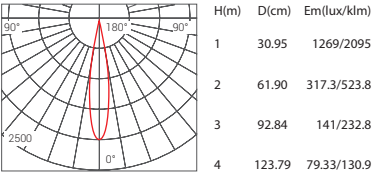

Beam Angle 24° 6W 3000K

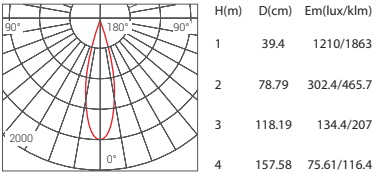

Beam Angle 38° 6W 3000K

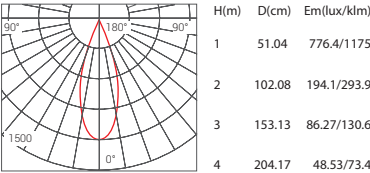


SPOTLIGHT



Colour:  Sand gold  Pearl Black  Black  White  Silver  Chrome

Optional :  Honey comb  Stripe



CM-100301E55 / 100302E55 / 100303E55 / 100304E55


Model Code	100301E55-60	100302E55-60	100303E55-60	100304E55-60
Power	6W	6W	6W	6W
Cut out	Φ55-60mm	Φ55-60mm	Φ55-60mm	Φ55-60mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	65x75mm	65x78mm	65x75mm	65x78mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	308 lm/338 lm/354 lm/376 lm	308 lm/338 lm/354 lm/376 lm	283 lm/312 lm/326 lm/346 lm	283 lm/312 lm/326 lm/346 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 6W 3000K

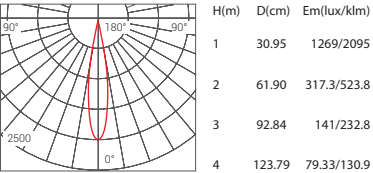

Beam Angle 24° 6W 3000K

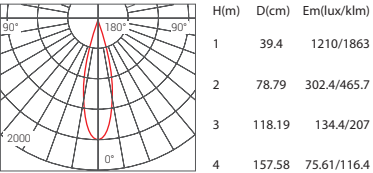

Beam Angle 38° 6W 3000K

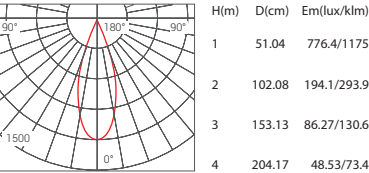

NEW

LINAN
6W




Colour:

Sand gold Pearl Black Black White Silver Chrome

Optional :

Honey comb Stripe



CM-100301E70 / 100302E70 / 100303E70 / 100304E70


Model Code	100301E70	100302E70	100303E70	100304E70
Power	6W	6W	6W	6W
Cut out	Φ70mm	Φ70mm	Φ70mm	Φ70mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	Φ80x81mm	Φ80x84mm	Φ80x81mm	Φ80x84mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	308 lm/338 lm/354 lm/376 lm	308 lm/338 lm/354 lm/376 lm	283 lm/312 lm/326 lm/346 lm	283 lm/312 lm/326 lm/346 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 6W 3000K

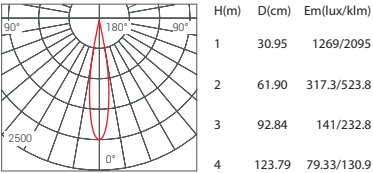

Beam Angle 24° 6W 3000K

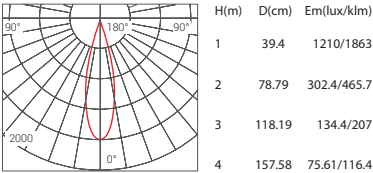

Beam Angle 38° 6W 3000K

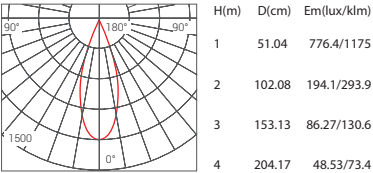

SPOTLIGHT




Colour:

Sand gold Pearl Black Black White Silver Chrome

Optional :

Honey comb Stripe

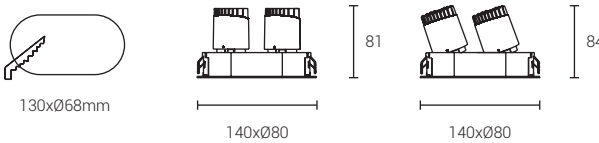

CM-100301E70-2 / 100302E70-2 / 100303E70-2 / 100304E70-2


Model Code	100301E70-2	100302E70-2	100303E70-2	100304E70-2
Power	2x6W	2x6W	2x6W	2x6W
Cut out	130xΦ68mm	130xΦ68mm	130xΦ68mm	130xΦ68mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	140xΦ80x81mm	140xΦ80x84mm	140xΦ80x81mm	140xΦ80x84mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	618 lm/680 lm/711 lm/754 lm	618 lm/680 lm/711 lm/754 lm	569 lm/625 lm/654 lm/694 lm	569 lm/625 lm/654 lm/694 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 6W 3000K

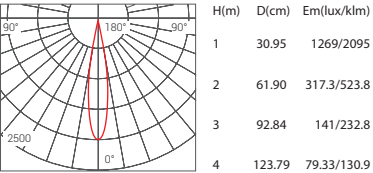


Beam Angle 24° 6W 3000K

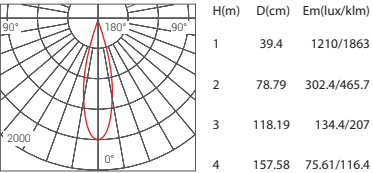

Beam Angle 38° 6W 3000K

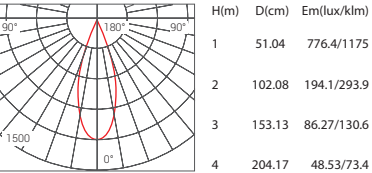

LINAN
6W

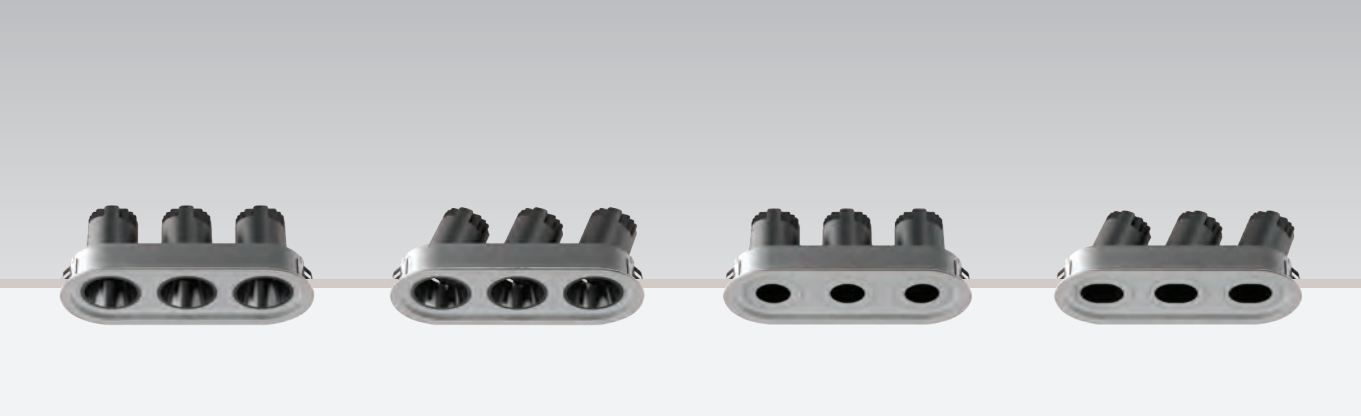

Colour:

Sand gold

Pearl Black

Black

White

Silver

Chrome

Optional :

Honey comb


Stripe

190xØ68mm

200x80

200x80

SPOTLIGHT

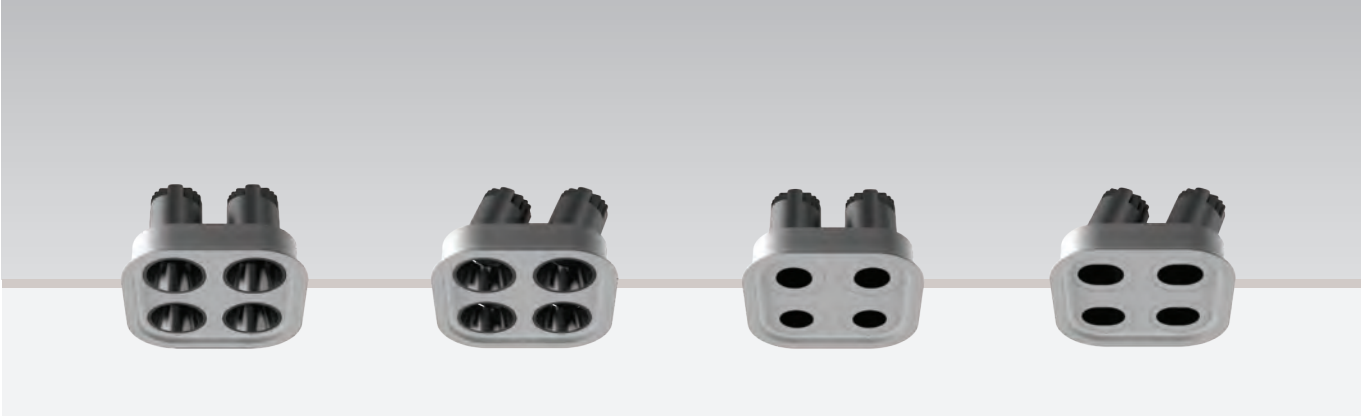

Colour:

Sand gold

Pearl Black

Black

White

Silver

Chrome

Optional :

Honey comb

Stripe

130x130mm

140x140

140x140

CM-100301E70-3 / 100302E70-3 / 100303E70-3 / 100304E70-3

Model Code	100301E70-3	100302E70-3	100303E70-3	100304E70-3
Power	6Wx3	6Wx3	6Wx3	6Wx3
Cut out	190xΦ68mm	190xΦ68mm	190xΦ68mm	190xΦ68mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	200x80x81mm	200x80x84mm	200x80x81mm	200x80x84mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	926 lm/1019 lm/1065 lm/1130 lm	926 lm/1019 lm/1065 lm/1130 lm	852 lm/937 lm/978 lm/1039 lm	852 lm/937 lm/978 lm/1039 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric



Photometric

LINAN
6W

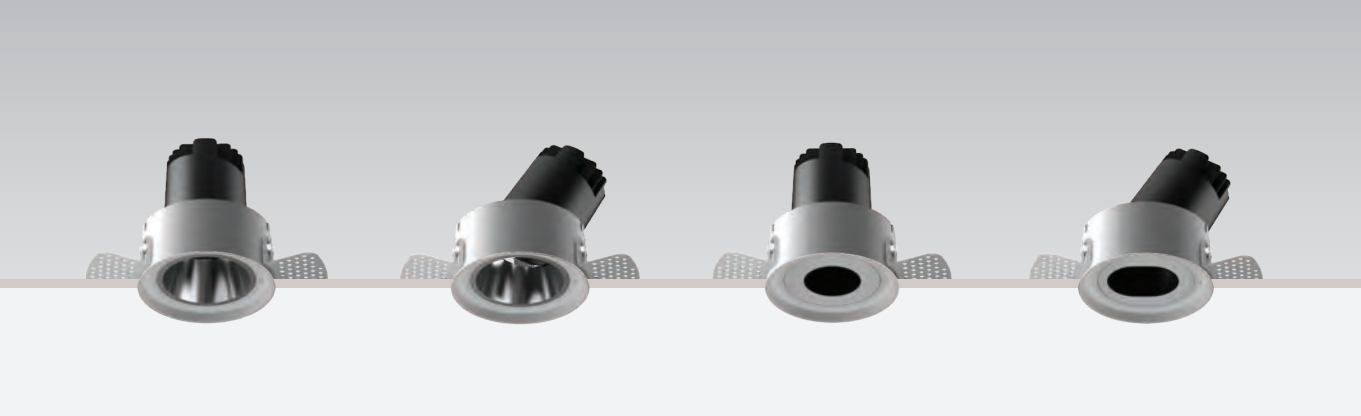

Colour:

 Sand gold

 Pearl Black

 Black

 White


 Silver

 Chrome

Optional :

 Honey comb

 Stripe

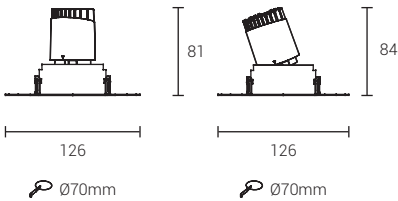

CM-100301T70 / 100302T70 / 100303T70 / 100304T70


Model Code	100301T70	100302T70	100303T70	100304T70
Power	6W	6W	6W	6W
Cut out	Φ70mm	Φ70mm	Φ70mm	Φ70mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	126x81mm	126x84mm	126x81mm	126x84mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	308 lm/338 lm/354 lm/376 lm	308 lm/338 lm/354 lm/376 lm	283 lm/312 lm/326 lm/346 lm	283 lm/312 lm/326 lm/346 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 6W 3000K

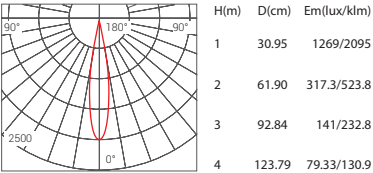


Beam Angle 24° 6W 3000K

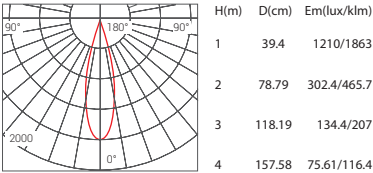

Beam Angle 38° 6W 3000K

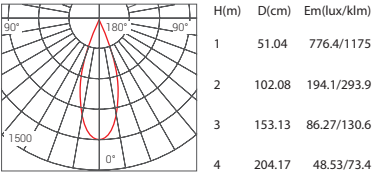

SPOTLIGHT

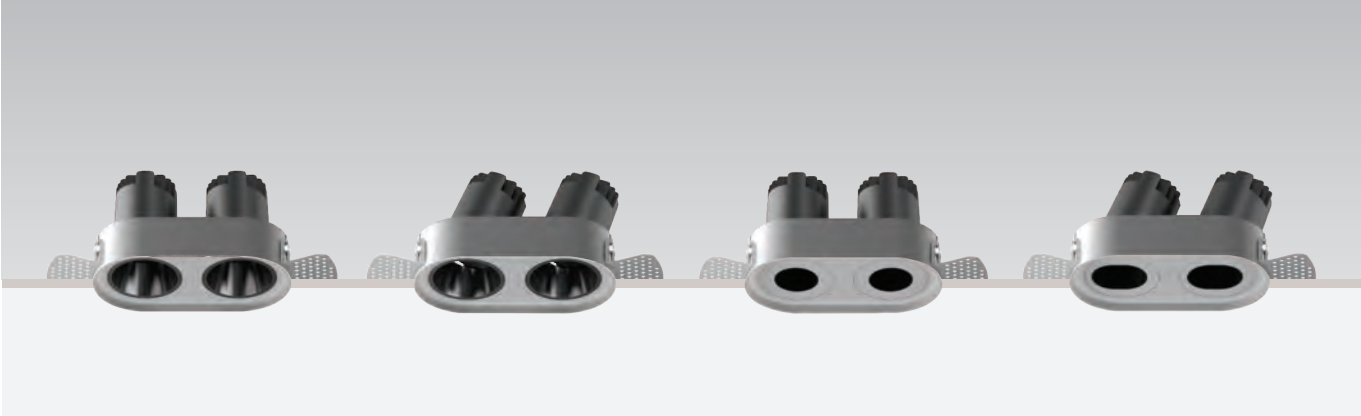

Colour:

 Sand gold

 Pearl Black

 Black

 White


 Silver

 Chrome

Optional :

 Honey comb

 Stripe

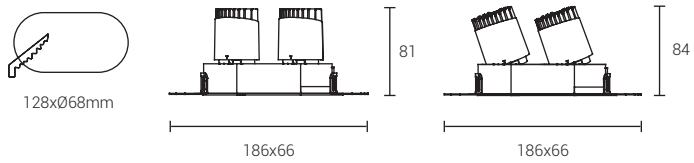

CM-100301T70-2 / 100302T70-2 / 100303T70-2 /100304T70-2


Model Code	100301T70-2	100302T70-2	100303T70-2	100304T70-2
Power	2x6W	2x6W	2x6W	2x6W
Cut out	128xΦ68mm	128xΦ68mmmm	128xΦ68mmmm	128xΦ68mmmm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	186x66x81mm	186x66x84mm	186x66x81mm	186x66x84mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	618 lm/680 lm/711 lm/754 lm	618 lm/680 lm/711 lm/754 lm	569 lm/625 lm/654 lm/694 lm	569 lm/625 lm/654 lm/694 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 6W 3000K

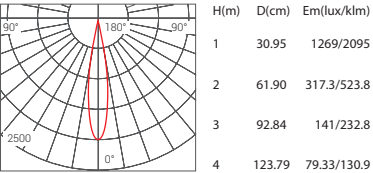


Beam Angle 24° 6W 3000K

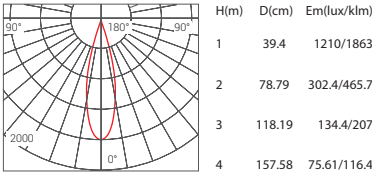

Beam Angle 38° 6W 3000K

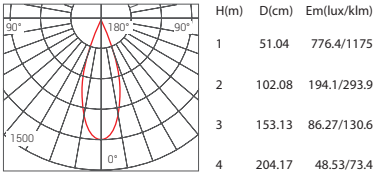

LINAN
6W

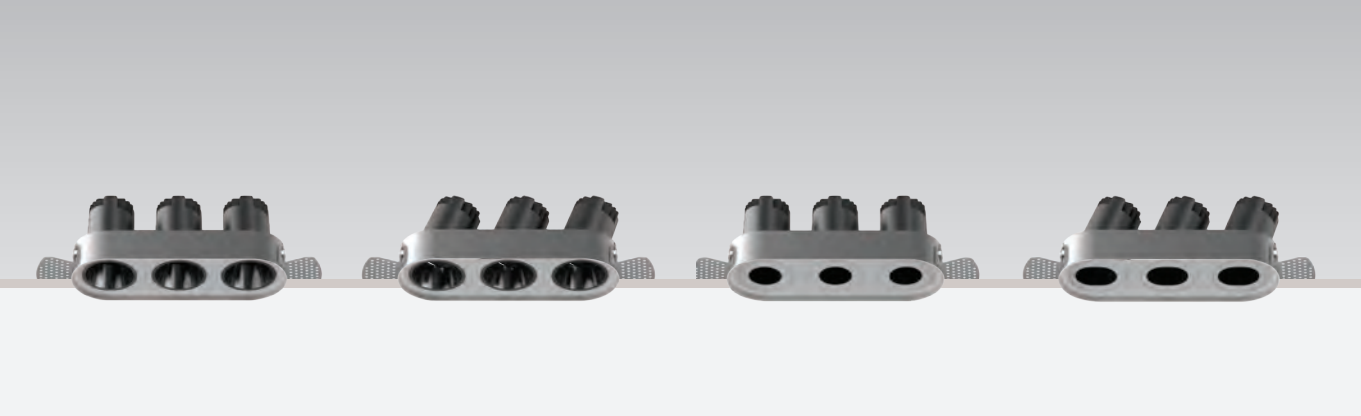

Colour:

Optional :

CM-100301T70-3 / 100302T70-3 /100303T70-3 / 100304T70-3


Model Code	100301T70-3	100302T70-3	100303T70-3	100304T70-3
Power	6Wx3	6Wx3	6Wx3	6Wx3
Cut out	188xΦ68mm	188xΦ68mm	188xΦ68mm	188xΦ68mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	246x66x81mm	246x66x84mm	246x66x81mm	246x66x84mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	926 lm/1019 lm/1065 lm/1130 lm	926 lm/1019 lm/1065 lm/1130 lm	852 lm/937 lm/978 lm/1039 lm	852 lm/937 lm/978 lm/1039 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 6W 3000K

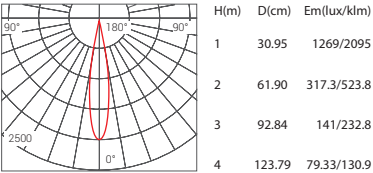


Beam Angle 24° 6W 3000K

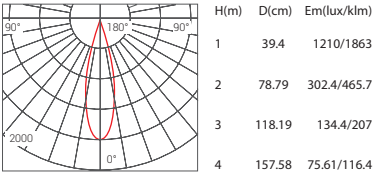

Beam Angle 38° 6W 3000K

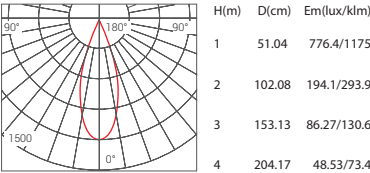

SPOTLIGHT

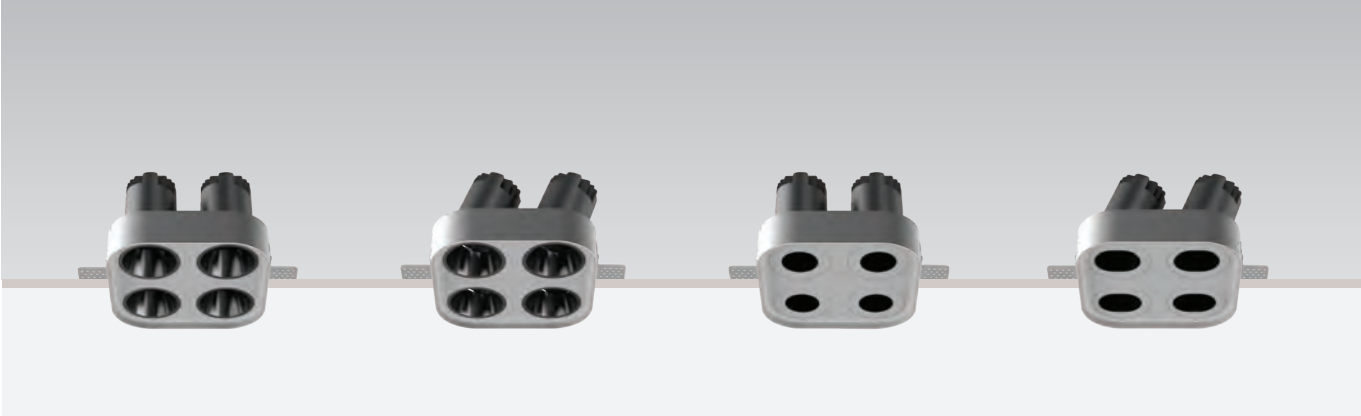

Colour:

Optional :

CM-100301T70-4 / 100302T70-4 / 100303T70-4 /100304T70-4


Model Code	100301T70-2	100302T70-4	100303T70-4	100304T70-4
Power	6Wx4	6Wx4	6Wx4	6Wx4
Cut out	130x128mm-R34	130x128mm-R34	130x128mm-R34	130x128mm-R34
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	186x126x81mm	186x126x84mm	186x126x81mm	186x126x84mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1234 lm/1357 lm/1419 lm/1505lm	1234 lm/1357 lm/1419 lm/1505lm	1135 lm/1249 lm/1306 lm/1385 lm	1135 lm/1249 lm/1306 lm/1385 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20 / IP65	IP20 / IP65	IP20 / IP65	IP20 / IP65

Photometric


Beam Angle 15° 6W 3000K

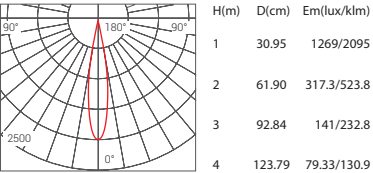


Beam Angle 24° 6W 3000K

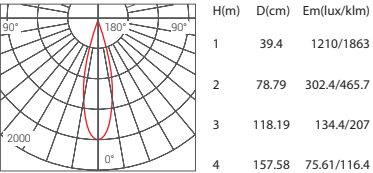

Beam Angle 38° 6W 3000K

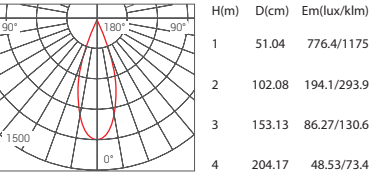

LINAN
12W

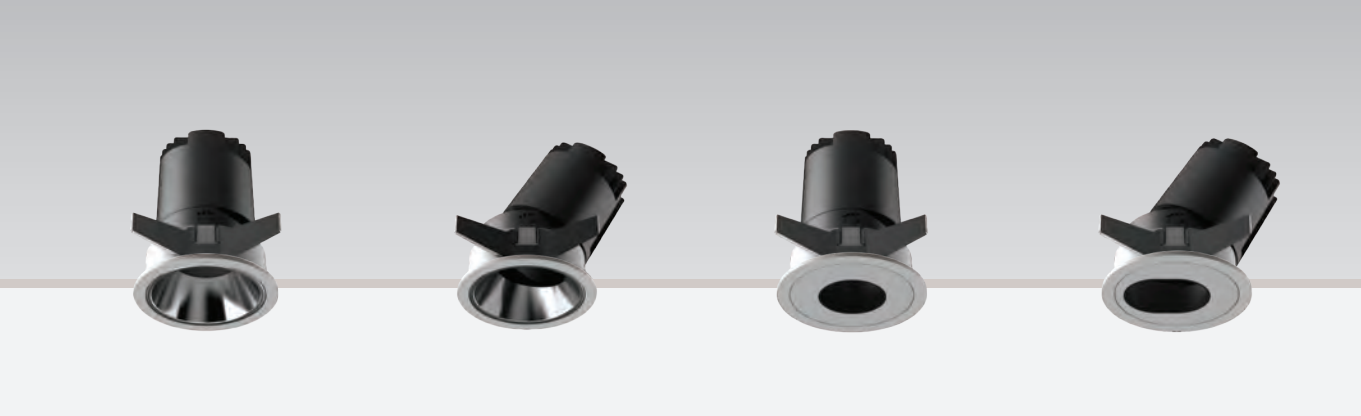


Colour:      

Sand gold Pearl Black Black White Silver Chrome

Optional :    

Honey comb Soft Lens Square Stripe



CM-100301E75 / 100302E75 / 100303E75 / 100304E75


Model Code	100301E75	100302E75	100303E75	100304E75
Power	12W	12W	12W	12W
Cut out	Φ75mm	Φ75mm	Φ75mm	Φ75mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	Φ86x104mm	Φ86x109mm	Φ86x104mm	Φ86x109mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	722 lm/794 lm/830 lm/881 lm	722 lm/794 lm/830 lm/881 lm	664 lm/731 lm/764 lm/810 lm	664 lm/731 lm/764 lm/810 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 12W 3000K

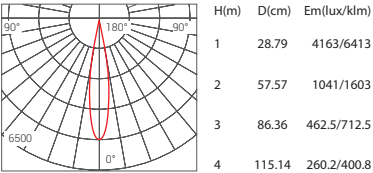


Beam Angle 24° 12W 3000K

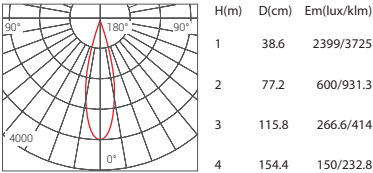

Beam Angle 38° 12W 3000K

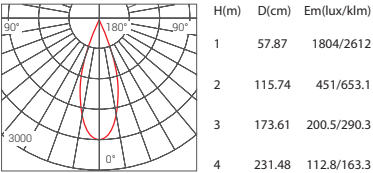

SPOTLIGHT

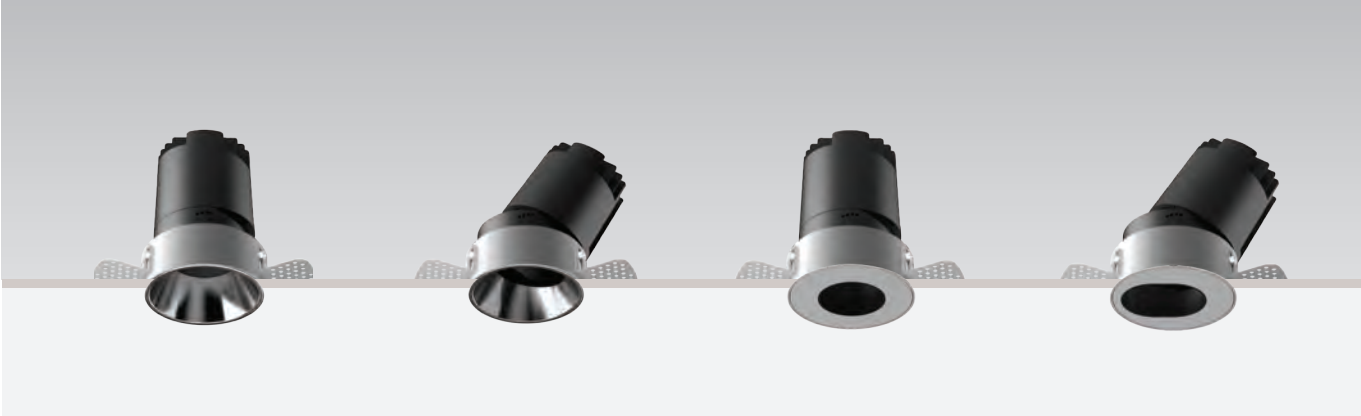


Colour:      

Sand gold Pearl Black Black White Silver Chrome

Optional :    

Honey comb Soft Lens Square Stripe

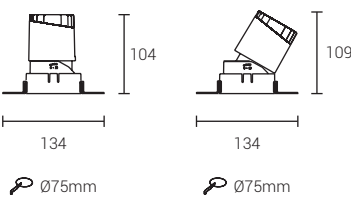

CM-100301T75 / 100302T75 / 100303T75 / 100304T75


Model Code	100301T75	100302T75	100303T75	100304T75
Power	12W	12W	12W	12W
Cut out	Φ75mm	Φ75mm	Φ75mm	Φ75mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	134x104mm	134x109mm	134x104mm	134x109mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	722 lm/794 lm/830 lm/881 lm	722 lm/794 lm/830 lm/881 lm	664 lm/731 lm/764 lm/810 lm	664 lm/731 lm/764 lm/810 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 12W 3000K

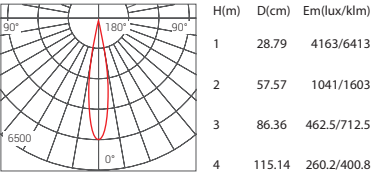


Beam Angle 24° 12W 3000K

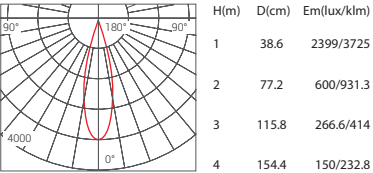

Beam Angle 38° 12W 3000K

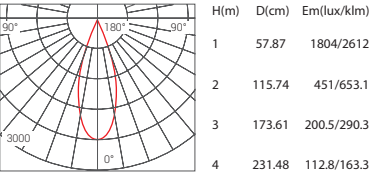

LINAN
12W

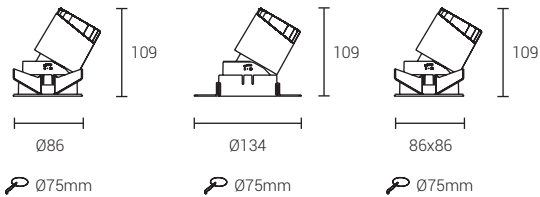

CM-100305E75 /100305T75 /100305P75


Model Code	XQ-100305E75	XQ-100305T75	XQ-100305P75
Power	12W	12W	12W
Cut out	Φ75mm	Φ75mm	Φ75mm
Light Source	CREE	CREE	CREE
Size(DxH)	Φ86x109mm	Φ134x109mm	86x86x109mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	614 lm/675 lm/706 lm/749 lm	614 lm/675 lm/706 lm/749 lm	614 lm/675 lm/706 lm/749 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 15° 12W 3000K

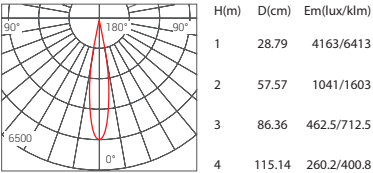



Beam Angle 24° 12W 3000K

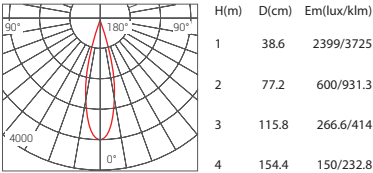

Beam Angle 38° 12W 3000K

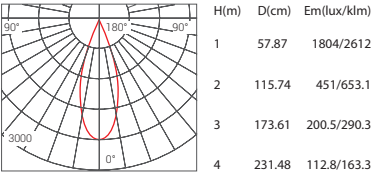

SPOTLIGHT

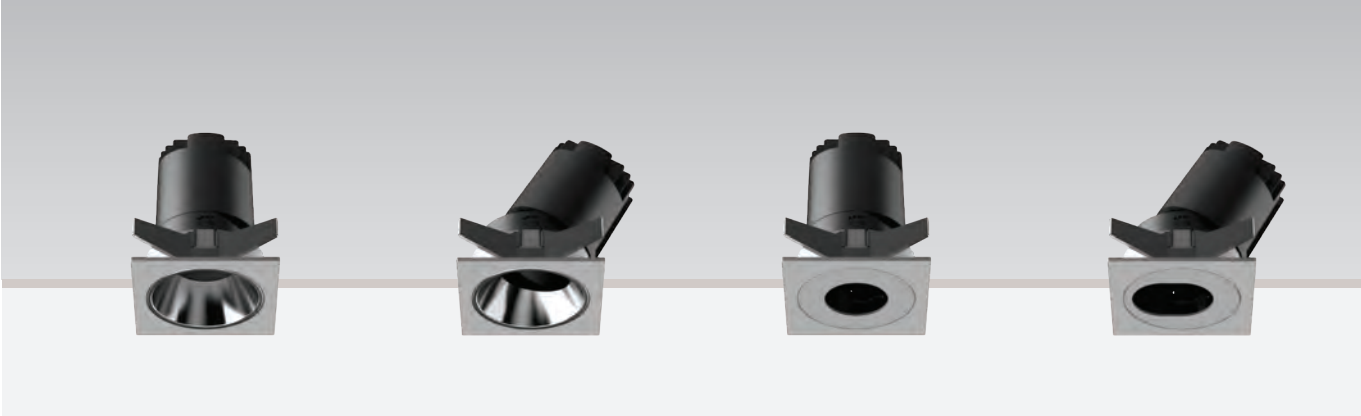

CM-100301P75 / 100302P75 / 100303P75 / 100304P75


Model Code	XQ-100301P75	XQ-100302P75	XQ-100303P75	XQ-100304P75
Power	12W	12W	12W	12W
Cut out	Φ75mm	Φ75mm	Φ75mm	Φ75mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	86x86x104mm	86x86x109mm	86x86x104mm	86x86x109mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	722 lm/794 lm/830 lm/881 lm	722 lm/794 lm/830 lm/881 lm	664 lm/731 lm/764 lm/810 lm	664 lm/731 lm/764 lm/810 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 12W 3000K

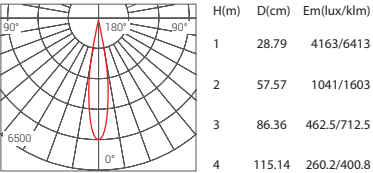


Beam Angle 24° 12W 3000K

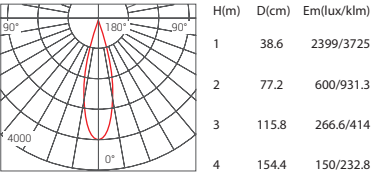

Beam Angle 38° 12W 3000K

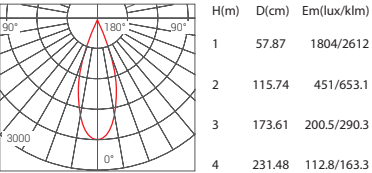

LINAN
12W

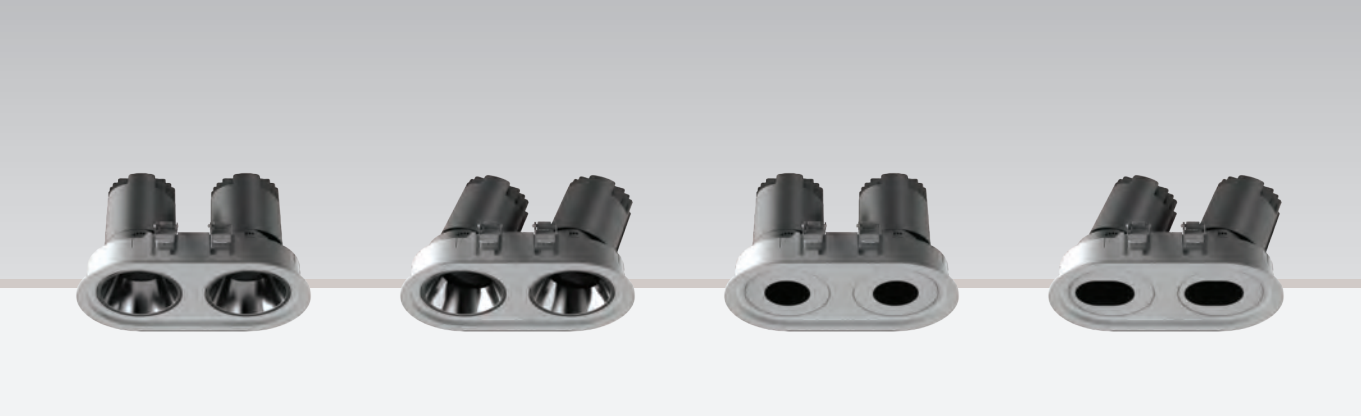

Colour:

 Sand gold

 Pearl Black

 Black

 White

 Silver

 Chrome


Optional :

 Honey comb

 Soft Lens

 Square

 Stripe

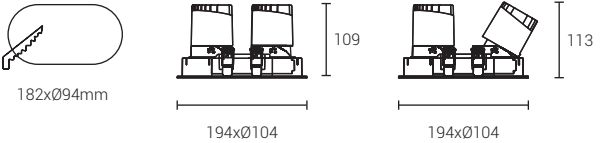

CM-100301E75-2 / 100302E75-2 / 100303E75-2 / 100304E75-2


Model Code	100301E75-2	100302E75-2	100303E75-2	100304E75-2
Power	2x12W	2x12W	2x12W	2x12W
Cut out	182xØ92mm	182xØ92mm	182xØ92mm	182xØ92mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	194xØ104x109mm	194xØ104x113mm	194xØ104x109mm	194xØ104x113mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1446 lm/1591 lm/1663 lm/1764 lm	1446 lm/1591 lm/1663 lm/1764 lm	1330 lm/1463 lm/1530 lm/1623 lm	1330 lm/1463 lm/1530 lm/1623 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 12W 3000K

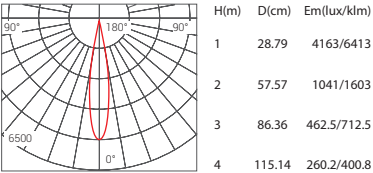


Beam Angle 24° 12W 3000K

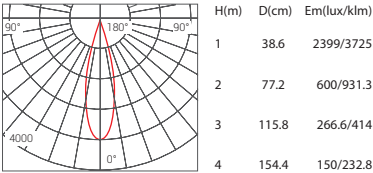

Beam Angle 38° 12W 3000K

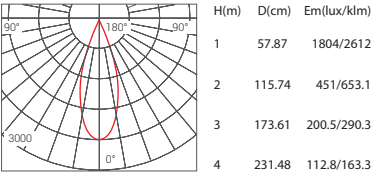

SPOTLIGHT

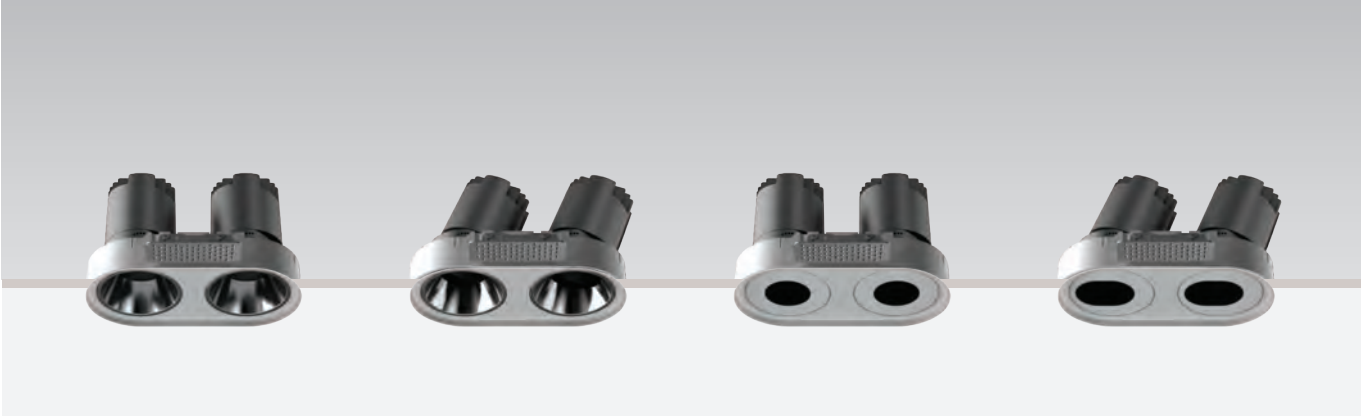

Colour:

 Sand gold

 Pearl Black

 Black

 White

 Silver

 Chrome


Optional :

 Honey comb

 Soft Lens

 Square

 Stripe

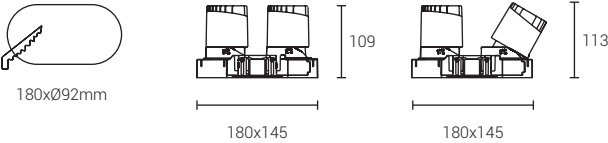

CM-100301T75-2 / 100302T75-2 / 100303T75-2 / 100304T75-2


Model Code	100301T75-2	100302T75-2	100303T75-2	100304T75-2
Power	2x12W	2x12W	2x12W	2x12W
Cut out	180xØ92mm	180xØ92mm	180xØ92mm	180xØ92mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	180x145x109mm	180x145x113mm	180x145x109mm	180x145x113mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°	10°/15°/24°/38°	10°/15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1446 lm/1591 lm/1663 lm/1764lm	1446 lm/1591 lm/1663 lm/1764lm	1330 lm/1463 lm/1530 lm/1623 lm	1330 lm/1463 lm/1530 lm/1623 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 12W 3000K

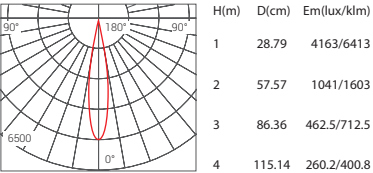


Beam Angle 24° 12W 3000K

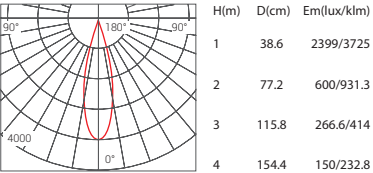

Beam Angle 38° 12W 3000K

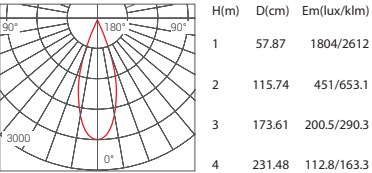

LINAN
12W

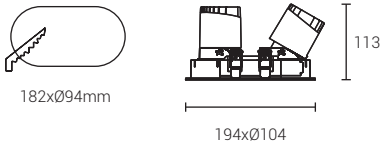

CM-100301E75-2


Model Code	100301E75-2
Power	2x12W
Cut out	182xØ92mm
Light Source	CREE
Size(DxH)	194xØ104x113mm

UGR	<19
CRI	≥80/≥90
Beam angle	10°/15°/24°


CCT	2700K/3000K/4000K/5000K
Lumens	1229 lm/1352 lm/1413 lm/1500 lm
Life time	50000 h
IP	IP20

Photometric


Beam Angle 15° 12W 3000K

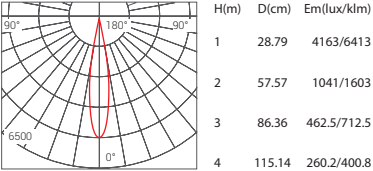


Beam Angle 24° 12W 3000K

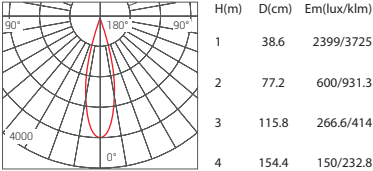

Beam Angle 38° 12W 3000K

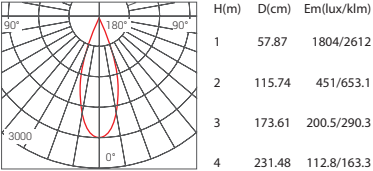

SPOTLIGHT

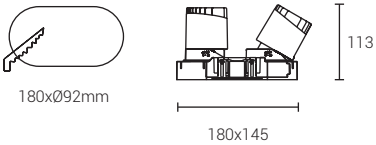

CM-100305T75-2


Model Code	100305T75-2
Power	2x12W
Cut out	180xØ92mm
Light Source	CREE
Size(DxH)	180x145x113mm

UGR	<19
CRI	≥80/≥90
Beam angle	10°/15°/24°


CCT	2700K/3000K/4000K/5000K
Lumens	1229 lm/1352 lm/1413 lm/1500 lm
Life time	50000 h
IP	IP20

Photometric


Beam Angle 15° 12W 3000K

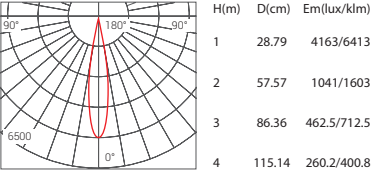


Beam Angle 24° 12W 3000K

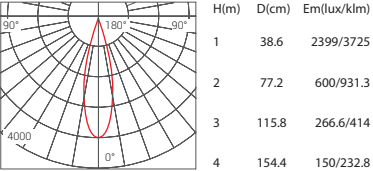

Beam Angle 38° 12W 3000K

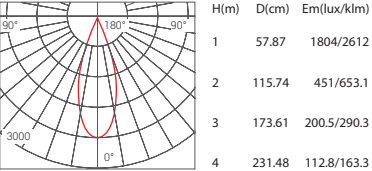

LINAN
12W

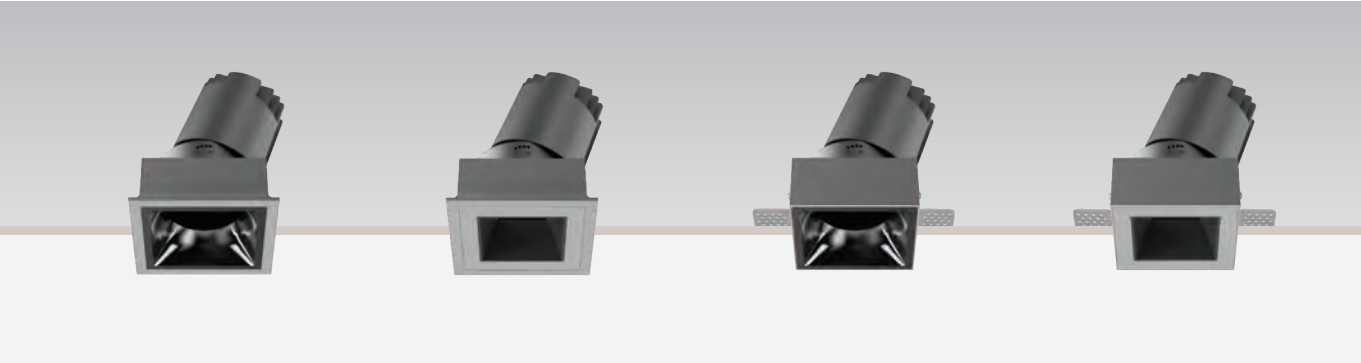

Colour:

Sand gold

Pearl Black

Black

White

Silver

Chrome

Optional :

Honey comb

Soft Lens

Square

Stripe

82x82mm

115

82x82mm

120

82x80mm

115

82x80mm

120

CM-100302E82 / 100303E82 / 100302T82 / 100303T82


Model Code	100302E82	100303E82	100302T82	100303T82
Power	12W	12W	12W	12W
Cut out	82x82mm	82x82mm	82x80mm	82x80mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	89x89x115mm	89x89x120mm	131x78x115mm	131x78x120mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	722 lm/794 lm/830 lm/881 lm	722 lm/794 lm/830 lm/881 lm	722 lm/794 lm/830 lm/881 lm	722 lm/794 lm/830 lm/881 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 12W 3000K

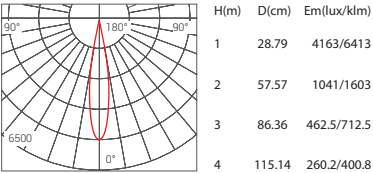


Beam Angle 24° 12W 3000K

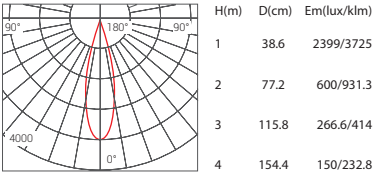

Beam Angle 38° 12W 3000K

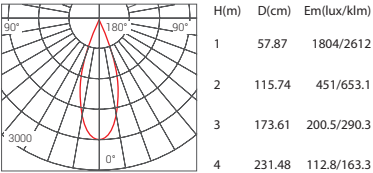

SPOTLIGHT

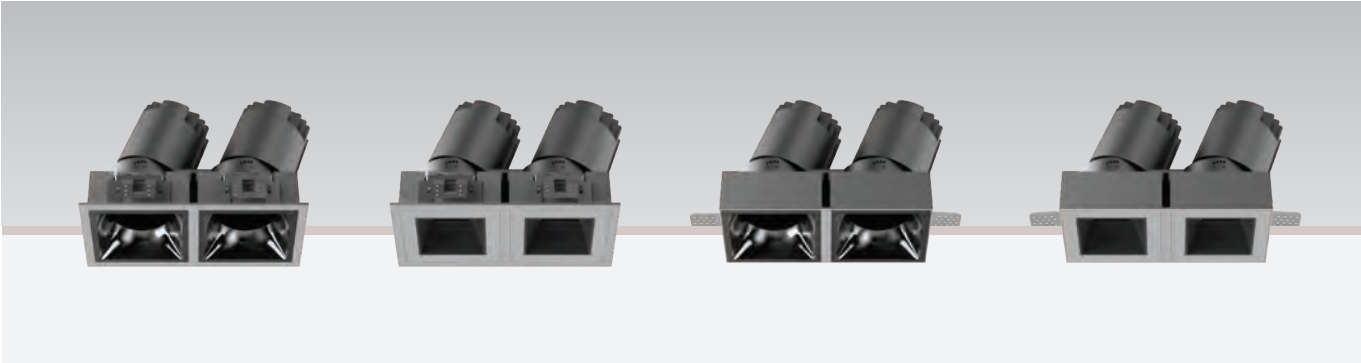

Colour:

Sand gold

Pearl Black

Black

White

Silver

Chrome

Optional :

Honey comb

Soft Lens

Square

Stripe

163x80mm

115

163x80mm

120

215x77mm

115

215x77mm

120

CM-100302E82-2 / 100303E82-2 / 100302T82-2 / 100303T82-2


Model Code	100302E82-2	100303E82-2	100302T82-2	100303T82-2
Power	2x12W	2x12W	2x12W	2x12W
Cut out	163x80mm	163x80mm	163x80mm	163x80mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	173x89x115mm	173x89x120mm	215x77x115mm	215x77x120mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1446 lm/1591 lm/1663 lm/1764 lm	1446 lm/1591 lm/1663 lm/1764 lm	1446 lm/1591 lm/1663 lm/1764 lm	1446 lm/1591 lm/1663 lm/1764 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 12W 3000K

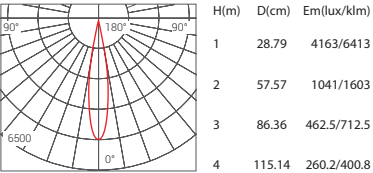


Beam Angle 24° 12W 3000K

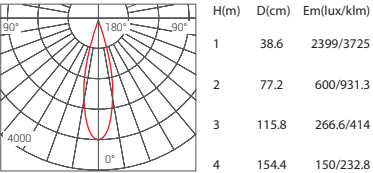

Beam Angle 38° 12W 3000K

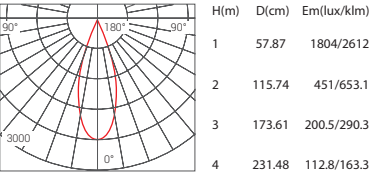

LINAN
12W

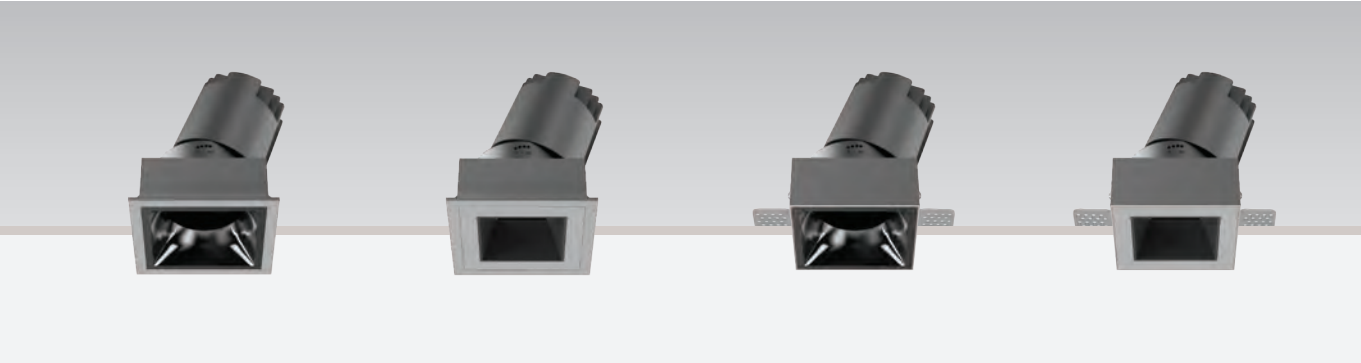

Colour:

Sand gold Pearl Black Black White Silver Chrome

Optional :

Honey comb Soft Lens Square Stripe

89x89

89x89

131x78


131x78

CM-100302E82 / 100303E82 / 100302T82 / 100303T82


Model Code	100302E82	100303E82	100302T82	100303T82
Power	12W	12W	12W	12W
Cut out	82x82mm	82x82mm	82x80mm	82x80mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	89x89x105mm	89x89x110mm	131x78x105mm	131x78x110mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°	10°/15°/24°/38°/50°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	722 lm/794 lm/830 lm/881 lm	722 lm/794 lm/830 lm/881 lm	722 lm/794 lm/830 lm/881 lm	722 lm/794 lm/830 lm/881 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

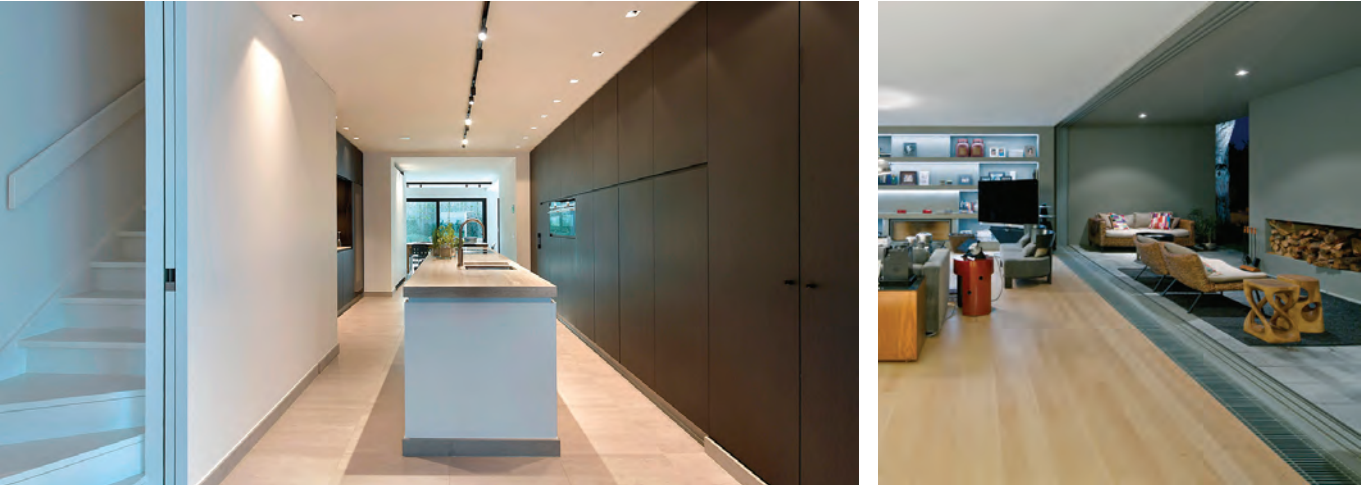

Photometric

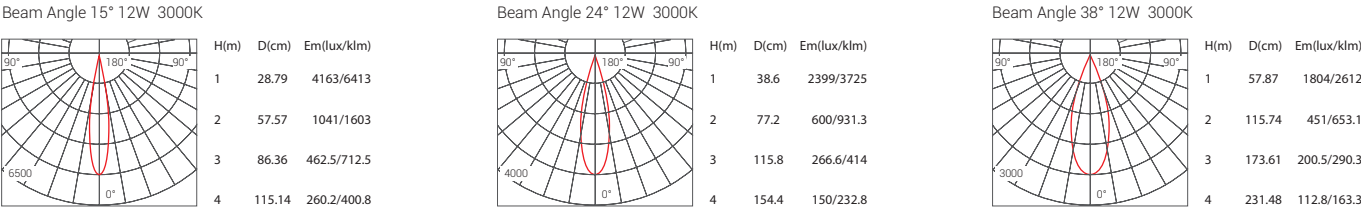

LINAN
20W

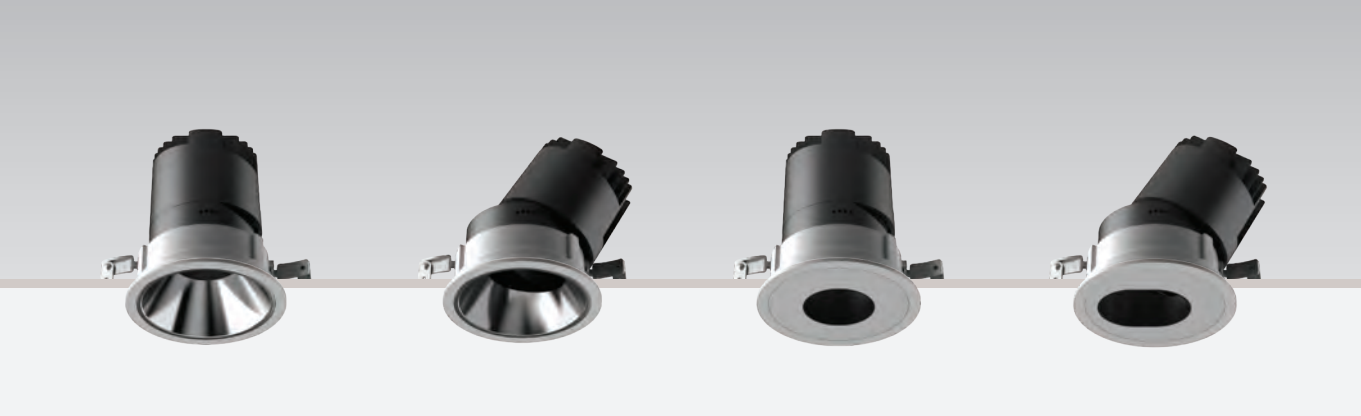

Colour:

Sand gold

Pearl Black

Black

White


Silver

Chrome

Optional :

Honey comb

Stripe



CM-100301E95 /100302E95 / 100303E95 /100304E95


Model Code	100301E95	100302E95	100303E95	100304E95
Power	20W	20W	20W	20W
Cut out	Φ95mm	Φ95mm	Φ95mm	Φ95mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	Φ106x119mm	Φ106x126mm	Φ106x119mm	Φ106x126mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/15°/24°/38°/55°	12°/15°/24°/38°/55°	12°/15°/24°	12°/15°/24°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1023 lm/1125 lm/1176 lm/1248 lm	1023 lm/1125 lm/1176 lm/1248 lm	941 lm/1035 lm/1082 lm/1148 lm	941 lm/1035 lm/1082 lm/1148 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 20W 3000K

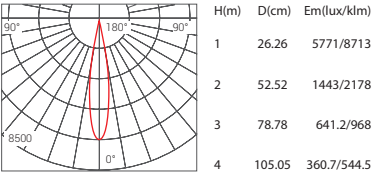


Beam Angle 24° 20W 3000K

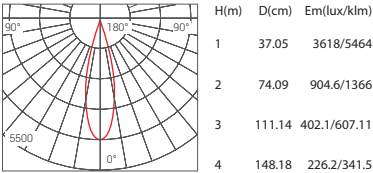

Beam Angle 38° 20W 3000K

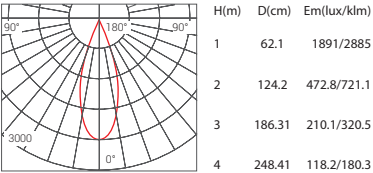

SPOTLIGHT

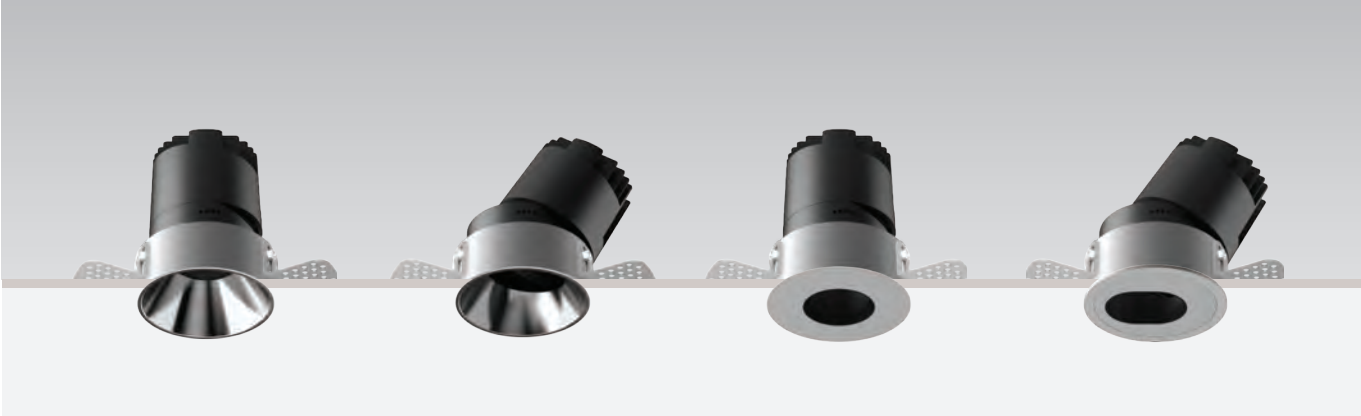

Colour:

Sand gold

Pearl Black

Black

White


Silver

Chrome

Optional :

Honey comb

Stripe

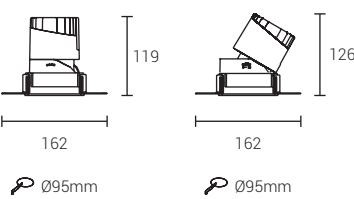

CM-100301T95 / 100302T95 / 100303T95 / 100304T95


Model Code	100301T95	100302T95	100303T95	100304T95
Power	20W	20W	20W	20W
Cut out	Φ95mm	Φ95mm	Φ95mm	Φ95mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	162x119mm	162x126mm	162x119mm	162x126mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/15°/24°/38°/55°	12°/15°/24°/38°/55°	12°/15°/24°	12°/15°/24°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1023 lm/1125 lm/1176 lm/1248 lm	1023 lm/1125 lm/1176 lm/1248 lm	941 lm/1035 lm/1082 lm/1148 lm	941 lm/1035 lm/1082 lm/1148 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 20W 3000K

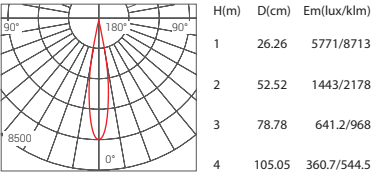


Beam Angle 24° 20W 3000K

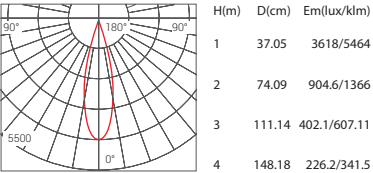

Beam Angle 38° 20W 3000K

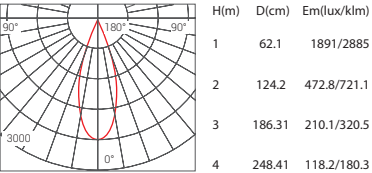

LINAN
20W

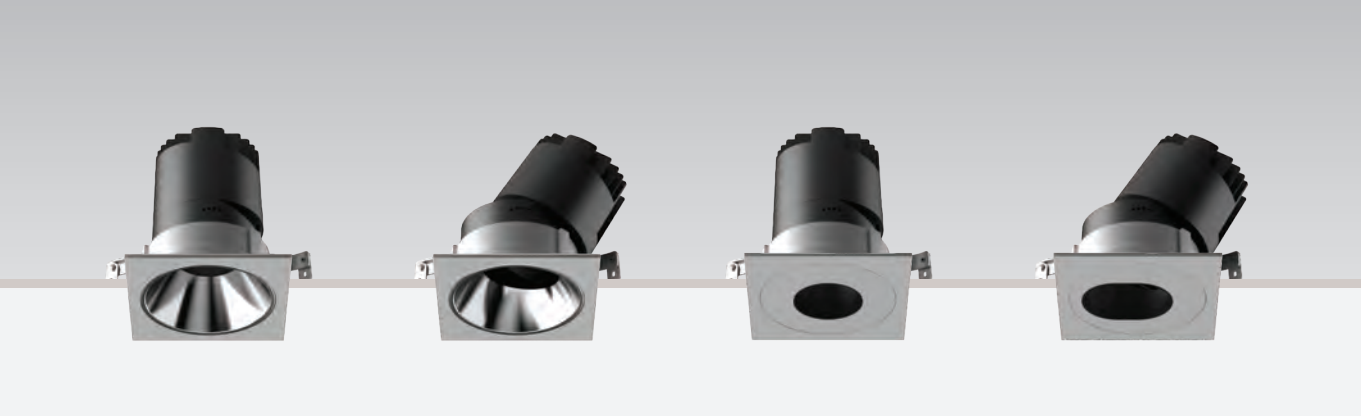


Colour:      

Sand gold Pearl Black Black White Silver Chrome

Optional :  

Honey comb Stripe



CM-100301P95 / 100302P95 / 100303P95 / 100304P95


Model Code	100301P95	100302P95	100303P95	100304P95
Power	20W	20W	20W	20W
Cut out	Φ95mm	Φ95mm	Φ95mm	Φ95mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	106x106x119mm	106x106x126mm	106x106x119mm	106x106x126mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/15°/24°/38°/55°	12°/15°/24°/38°/55°	12°/15°/24°/38	12°/15°/24°/38


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1023 lm/1125 lm/1176 lm/1248 lm	1023 lm/1125 lm/1176 lm/1248 lm	941 lm/1035 lm/1082 lm/1148 lm	941 lm/1035 lm/1082 lm/1148 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 20W 3000K

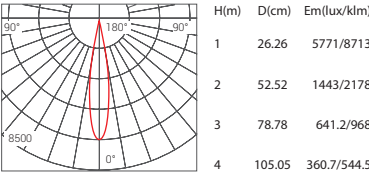



Beam Angle 24° 20W 3000K

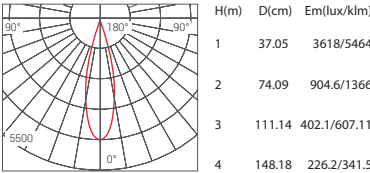

Beam Angle 38° 20W 3000K

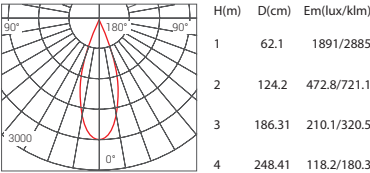

SPOTLIGHT

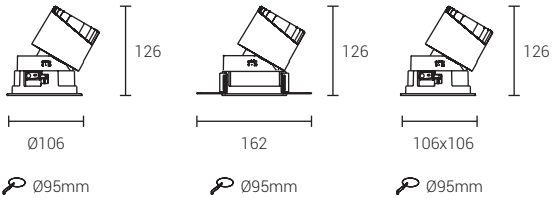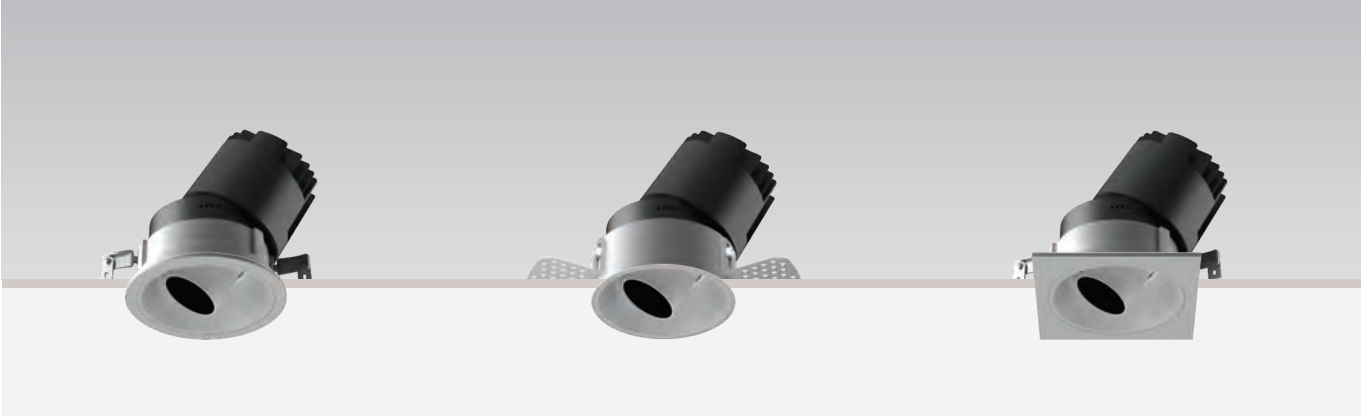

CM-100305E95 / 100305T95 / 100305P95


Model Code	100305E95	100305T95	100305P95
Power	20W	20W	20W
Cut out	Φ95mm	Φ95mm	Φ95mm
Light Source	CREE	CREE	CREE
Size(DxH)	Φ106x126mm	162x126mm	106x106x126mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/15°/24°	12°/15°/24°	12°/15°/24°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	870 lm/957 lm/1000 lm/1061 lm	870 lm/957 lm/1000 lm/1061 lm	870 lm/957 lm/1000 lm/1061 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

配光参数 Photometric


Beam Angle 15° 20W 3000K

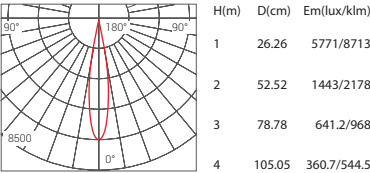


Beam Angle 24° 20W 3000K

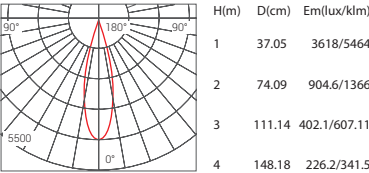

Beam Angle 38° 20W 3000K

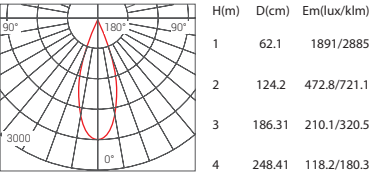

LINAN
20W

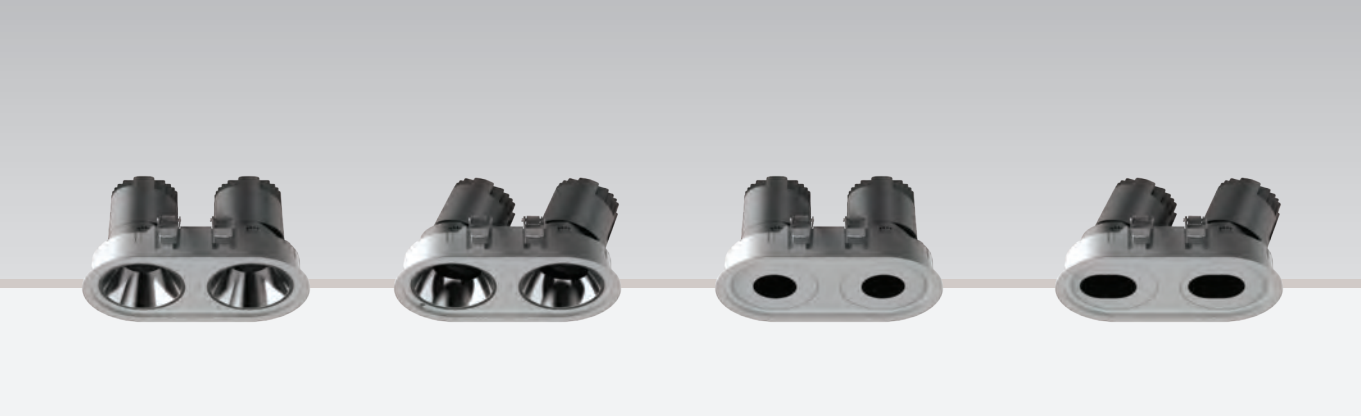

Colour:

 Sand gold

 Pearl Black

 Black

 White


 Silver

 Chrome

Optional :

 Honey comb

 Stripe

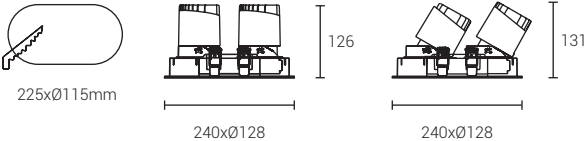

CM-100301E95-2 / 100302E95-2 / 100303E95-2 / 100304E95-2


Model Code	100301E95-2	100302E95-2	100303E95-2	100304E95-2
Power	2x20W	2x20W	2x20W	2x20W
Cut out	225xØ115mm	225xØ115mm	225xØ115mm	225xØ115mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	240xØ128x126mm	240xØ128x131mm	240xØ128x126mm	240xØ128x131mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	2048 lm/2253 lm/2355 lm/2499 lm	2048 lm/2253 lm/2355 lm/2499 lm	1884 lm/2073 lm/2167 lm/2299 lm	1884 lm/2073 lm/2167 lm/2299 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 20W 3000K

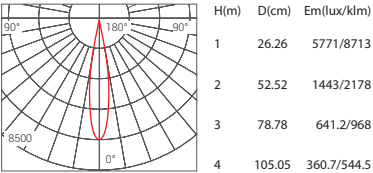


Beam Angle 24° 20W 3000K

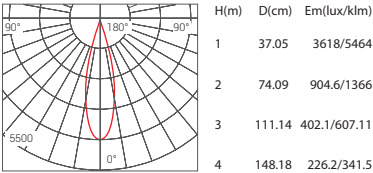

Beam Angle 38° 20W 3000K

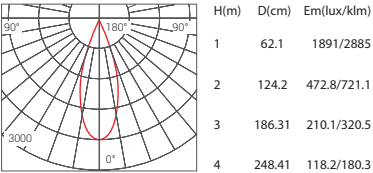

SPOTLIGHT

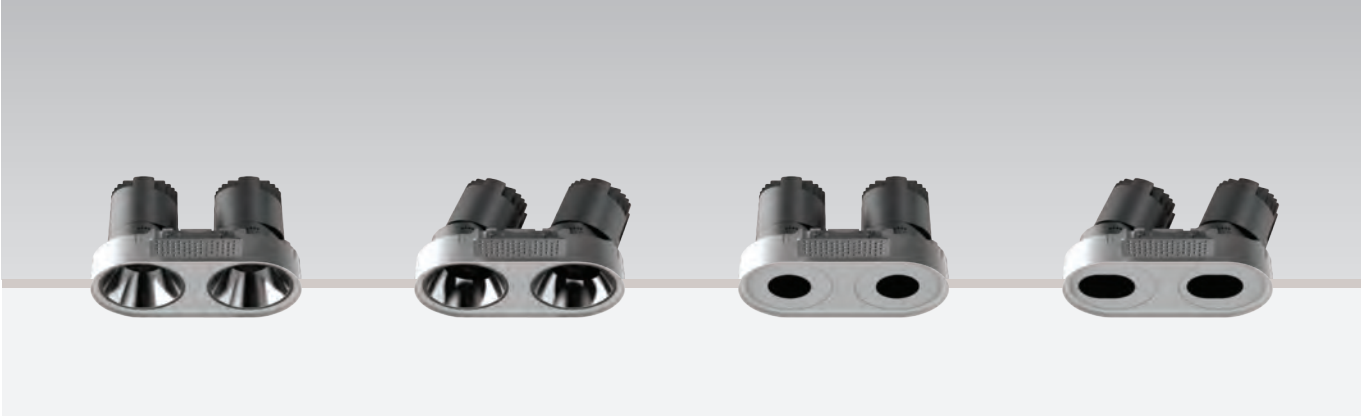

Colour:

 Sand gold

 Pearl Black

 Black

 White


 Silver

 Chrome

Optional :

 Honey comb

 Stripe

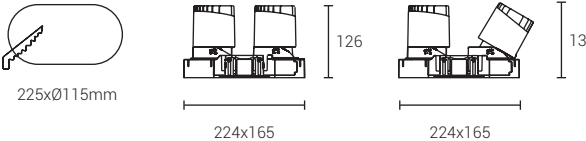

CM-100301T95-2 / 100302T95-2 / 100303T95-2 / 100304T95-2


Model Code	100301T95-2	100302T95-2	100303T95-2	100304T95-2
Power	2x20W	2x20W	2x20W	2x20W
Cut out	225xØ115mm	225xØ115mm	225xØ115mm	225xØ115mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	224x165x126mm	224x165x131mm	224x165x126mm	224x165x131mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	2048 lm/2253 lm/2355 lm/2499 lm	2048 lm/2253 lm/2355 lm/2499 lm	1884 lm/2073 lm/2167 lm/2299 lm	1884 lm/2073 lm/2167 lm/2299 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 20W 3000K

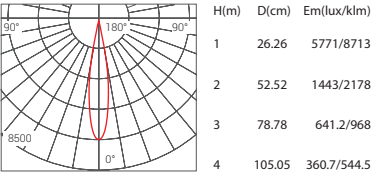


Beam Angle 24° 20W 3000K

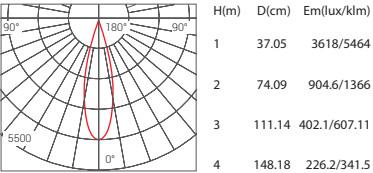

Beam Angle 38° 20W 3000K

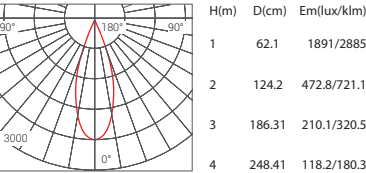

LINAN
20W



CM-100301E95-2


Model Code	100301E95-2
Power	2x20W
Cut out	225xØ115mm
Light Source	CREE
Size(DxH)	240xØ128x131mm

UGR	<19
CRI	≥80/≥90
Beam angle	12°/15°/24°


CCT	2700K/3000K/4000K/5000K
Lumens	1741 lm/1915 lm/2002 lm/2124 lm
Life time	50000 h
IP	IP20

Photometric


Beam Angle 15° 20W 3000K

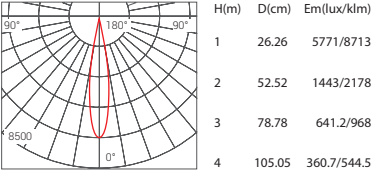


Beam Angle 24° 20W 3000K

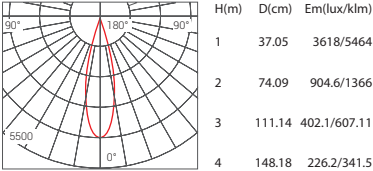

Beam Angle 38° 20W 3000K

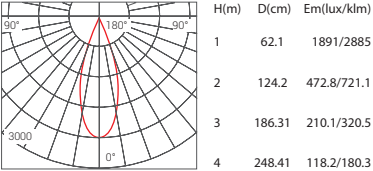

SPOTLIGHT



CM-100305T95-2


Model Code	100305T95-2
Power	2x20W
Cut out	225xØ115mm
Light Source	CREE
Size(DxH)	224x165x131mm

UGR	<19
CRI	≥80/≥90
Beam angle	12°/15°/24°


CCT	2700K/3000K/4000K/5000K
Lumens	1741 lm/1915 lm/2002 lm/2124 lm
Life time	50000 h
IP	IP20

Photometric


Beam Angle 15° 20W 3000K

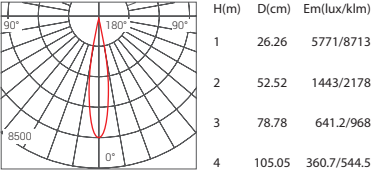

Beam Angle 24° 20W 3000K

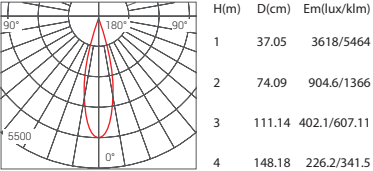

Beam Angle 38° 20W 3000K

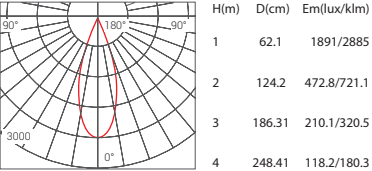

LINAN
30W



Colour:

 Sand gold

 Pearl Black

 Black

 White

 Silver

 Chrome


Optional :

 Honey comb

 Soft Lens

 Square

 Stripe



CM-100301E120 /100302E120 /100305E120


Model Code	100301E120	100302E120	100305E120
Power	30W	30W	30W
Cut out	Φ120mm	Φ120mm	Φ120mm
Light Source	CREE	CREE	CREE
Size(DxH)	Φ132x145mm	Φ132x155mm	Φ132x155mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/55°	10°/15°/24°/38°/55°	10°/15°/24°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1502 lm/1652 lm/1727 lm/1832 lm	1502 lm/1652 lm/1727 lm/1832 lm	1277 lm/1404 lm/1468 lm/1558 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 15° 30W 3000K

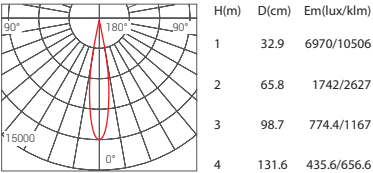

Beam Angle 24° 30W 3000K

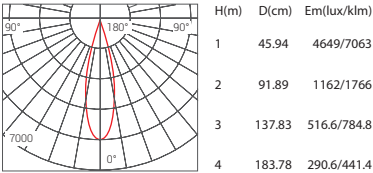

Beam Angle 38° 30W 3000K

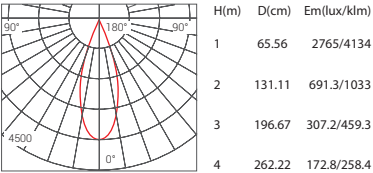

SPOTLIGHT



Colour:

 Sand gold

 Pearl Black

 Black

 White

 Silver

 Chrome


Optional :

 Honey comb

 Soft Lens

 Square

 Stripe

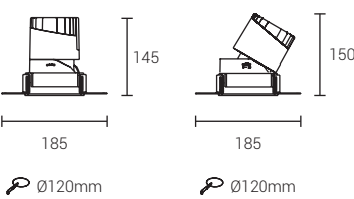

CM-100301T120 / 100302T120 / 100305T120


Model Code	100301T120	100302T120	100305T120
Power	30W	30W	30W
Cut out	Φ120mm	Φ120mm	Φ120mm
Light Source	CREE	CREE	CREE
Size(DxH)	185x145mm	185x150mm	185x150mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/55°	10°/15°/24°/38°/55°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1502 lm/1652 lm/1727 lm/1832 lm	1502 lm/1652 lm/1727 lm/1832 lm	1277 lm/1404 lm/1468 lm/1558 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 15° 30W 3000K

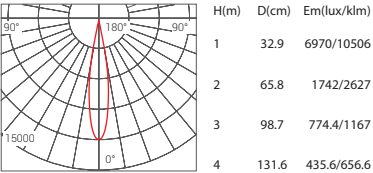

Beam Angle 24° 30W 3000K

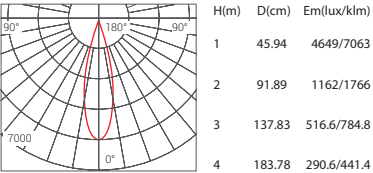

Beam Angle 38° 30W 3000K

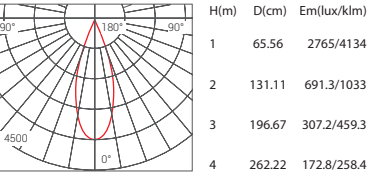


LINAN
30W



Colour:  Sand gold  Pearl Black  Black  White  Silver  Chrome

Optional :  Honey comb  Soft Lens  Square  Stripe



CM-100301P120 / 100302P120 / 100305P120


Model Code	100301P120	100302P120	100305P120
Power	30W	30W	30W
Cut out	Φ120mm	Φ120mm	Φ120mm
Light Source	CREE	CREE	CREE
Size(LxWxH)	133x133x145mm	133x133x155mm	133x133x155mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/55°	10°/15°/24°/38°/55°	10°/15°/24°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1502 lm/1652 lm/1727 lm/1832 lm	1502 lm/1652 lm/1727 lm/1832 lm	1277 lm/1404 lm/1468 lm/1558 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 15° 30W 3000K

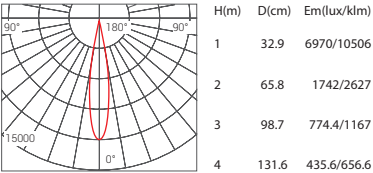

Beam Angle 24° 30W 3000K

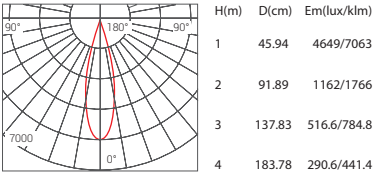

Beam Angle 38° 30W 3000K

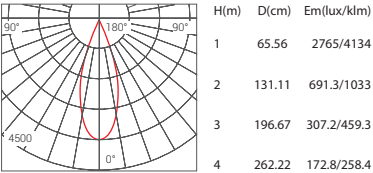


SPOTLIGHT



Colour:  Sand gold  Pearl Black  Black  White  Silver  Chrome

Optional :  Honey comb  Soft Lens  Square  Stripe



CM-100301E150 / 100302E150 /100305E150


Model Code	100301E150	100302E150	100305E150
Power	30W	30W	30W
Cut out	Φ150mm	Φ150mm	Φ150mm
Light Source	CREE	CREE	CREE
Size(DxH)	Φ162x154mm	Φ162x158mm	Φ162x158mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/55°	10°/15°/24°/38°/55°	10°/15°/24°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1502 lm/1652 lm/1727 lm/1832 lm	1502 lm/1652 lm/1727 lm/1832 lm	1277 lm/1404 lm/1468 lm/1558 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

配光参数 Photometric


Beam Angle 15° 30W 3000K

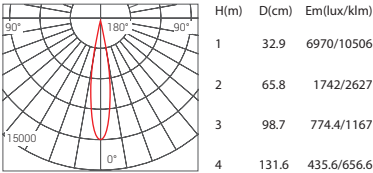

Beam Angle 24° 30W 3000K

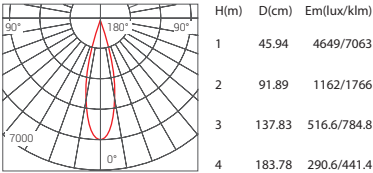

Beam Angle 38° 30W 3000K

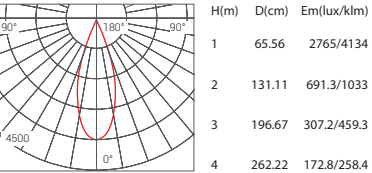

LINAN
30W



Colour:

Sand gold

Pearl Black

Black

White

Silver

Chrome


Optional :

Honey comb

Soft Lens

Square

Stripe



280xØ140mm



296xØ167



296xØ167

150

161

SPOTLIGHT



Colour:

Sand gold

Pearl Black

Black

White

Silver

Chrome


Optional :

Honey comb

Soft Lens

Square

Stripe



280xØ140mm



278x195



278x195

150

161

CM-100301E120-2 / 100302E120-2 / 100305E120-2


Model Code	100301E120-2	100302E120-2	100305E120-2
Power	2x30W	2x30W	2x30W
Cut out	280xΦ140mm	280xΦ140mm	280xΦ140mm
Light Source	CREE	CREE	CREE
Size(DxH)	296xΦ167x150mm	296xΦ167x161mm	296xΦ167x161mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/55°	10°/15°/24°/38°/55°	10°/15°/24°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	3006 lm/3307 lm/3457 lm/3667 lm	3006 lm/3307 lm/3457 lm/3667 lm	2555 lm/2811 lm/2938 lm/3117 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 15° 30W 3000K

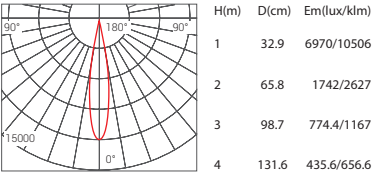

Beam Angle 24° 30W 3000K

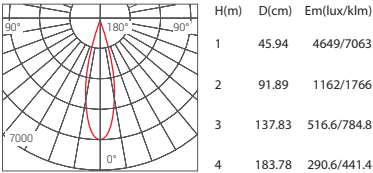

Beam Angle 38° 30W 3000K

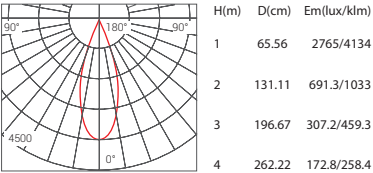

CM-100301T120-2 / 100302T120-2 / 100305T120-2


Model Code	100301T120-2	100302T120-2	100305T120-2
Power	2x30W	2x30W	2x30W
Cut out	280xΦ140mm	280xΦ140mm	280xΦ140mm
Light Source	CREE	CREE	CREE
Size(DxH)	278x195x150mm	278x195x150mm	278x195x161mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	10°/15°/24°/38°/55°	10°/15°/24°/38°/55°	10°/15°/24°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	3006 lm/3307 lm/3457 lm/3667 lm	3006 lm/3307 lm/3457 lm/3667 lm	2555 lm/2811 lm/2938 lm/3117 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 15° 30W 3000K

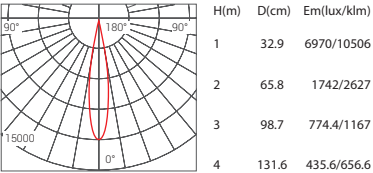


Beam Angle 24° 30W 3000K

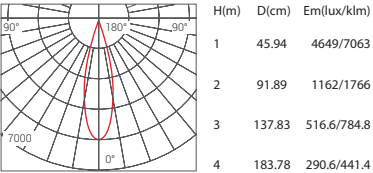

Beam Angle 38° 30W 3000K

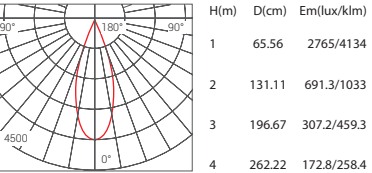

LINAN
MR16

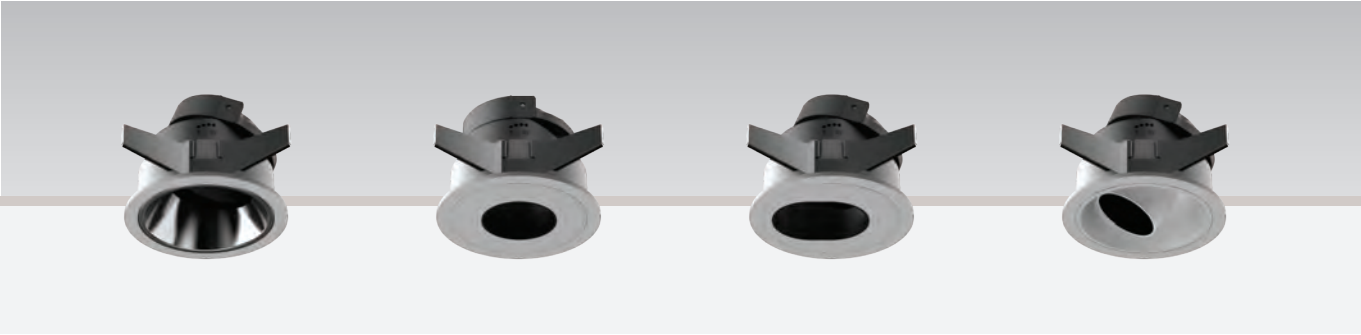

Colour:

Sand gold

Pearl Black

Black

White

Silver

Chrome

Optional :

Honey comb

Soft Lens

Square

Stripe

CM-100302E75 MR16 / 100303E75 MR16 / 100304E75 MR16 / 100305E75 MR16


Model Code	100302E75 MR16	100303E75 MR16	100304E75 MR16	100305E75 MR16
Power	/	/	/	/
Cut out	Φ75mm	Φ75mm	Φ75mm	Φ75mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	Φ85x64mm	Φ85x58mm	Φ85x64mm	Φ85x64mm



CM-100302T75 MR16 /100303T75 MR16 / 100304T75 MR16 / 100305T75 MR16


Model Code	100302T75 MR16	100303T75 MR16	100304T75 MR16	100305T75 MR16
Power	/	/	/	/
Cut out	Φ75mm	Φ75mm	Φ75mm	Φ75mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	134x64mm	134x58mm	Φ134x64mm	Φ134x64mm

SPOTLIGHT

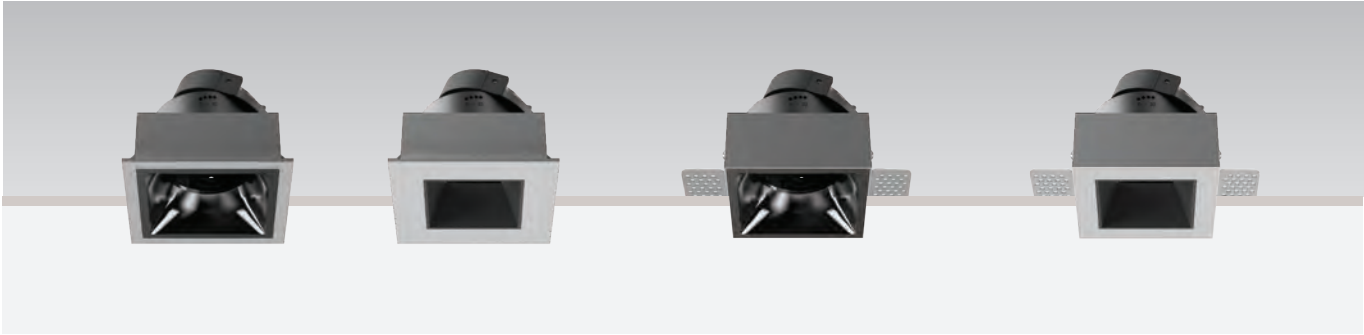


CM-100302E82 MR16 /100303E82 MR16 / 100302T82 MR16 / 100303T82 MR16

Model Code	100302E82 MR16	100303E82 MR16	100302T82 MR16	100303T82 MR16
Power	/	/	/	/
Cut out	82x82mm	82x82mm	82x79mm	82x79mm
Light Source	CREE	CREE	CREE	CREE
Size(LxWxH)	89x89x68mm	89x89x72mm	151x89x68mm	151x89x72mm

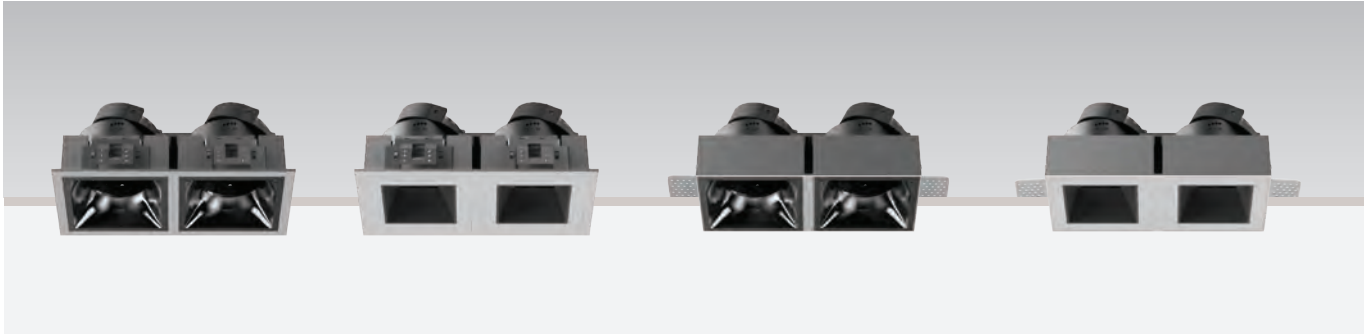


CM-100302E82-2 MR16 / 100303E82-2 MR16 / 100302T82-2 MR16 / 100303T82-2 MR16

Model Code	100302E82-2 MR16	100303E82-2 MR16	100302T82-2 MR16	100303T82-2 MR16
Power	/	/	/	/
Cut out	163x80mm	163x80mm	163x80mm	163x80mm
Light Source	CREE	CREE	CREE	CREE
Size(LxWxH)	173x89x68mm	173x89x72mm	215x77x68mm	215x77x72mm

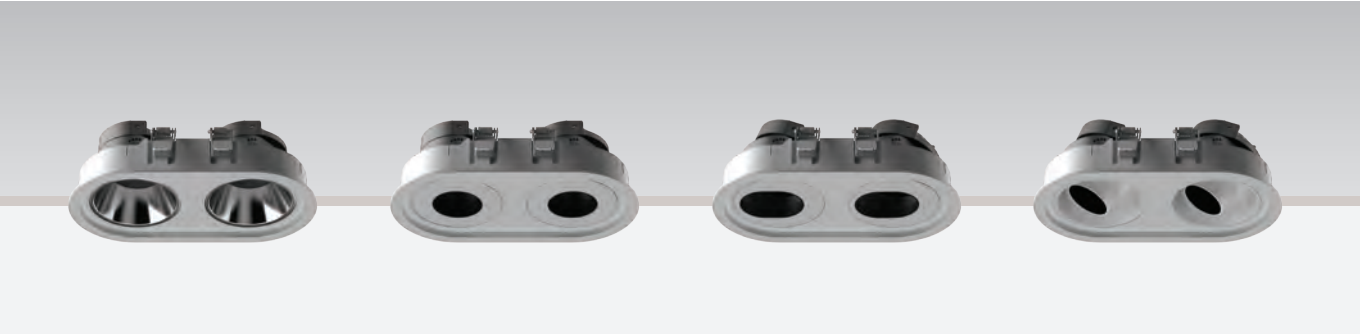


- Colour:
-  Sand gold
-  Pearl Black
-  Black
-  White
-  Silver
-  Chrome
- Optional :
-  Honey comb
-  Soft Lens
-  Square
-  Stripe

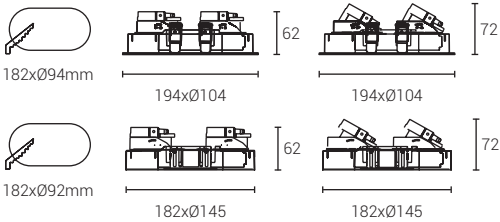

CM-100302E75-2 MR16 / 100303E75-2 MR16 / 100304E75-2 MR16 / 100301E75-2 MR16

Model Code	100302E75-2 MR16	100303E75-2 MR16	100304E75-2 MR16	100301E75-2 MR16
Power	/	/	/	/
Cut out	182xΦ94mm	182xΦ94mm	182xΦ94mm	182xΦ94mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	194xΦ104x62mm	194xΦ104x62mm	194xΦ104x72mm	194xΦ104x72mm

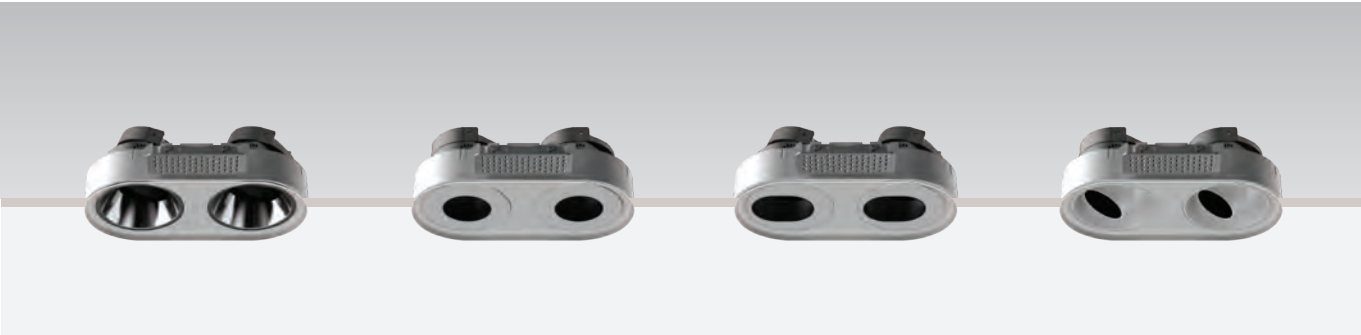

CM-100302T75-2 MR16 / 100303T75-2 MR16 / 100304T75-2 MR16 / 100305T75-2 MR16

Model Code	100302T75-2 MR16	100303T75-2 MR16	100304T75-2 MR16	100305T75-2 MR16
Power	/	/	/	/
Cut out	182xΦ92mm	182xΦ92mm	182xΦ92mm	182xΦ92mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	182x145x62mm	182x145x62mm	182x145x72mm	182x145x72mm

MR0710



MR1215




MR0710 / MR1215


Model Code	MR0710	MR1215
Power	10W	15W
Cut out	/	/
Light Source	CREE	CREE
Size(DxH)	Φ50x71mm	Φ50x80mm
Beam angle	20°/40°	20°/40°

Photometric


Beam Angle 20° 10W 3000K

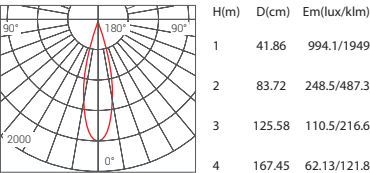


Beam Angle 40° 10W 3000K

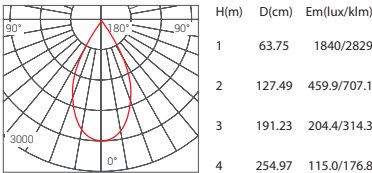


Beam Angle 20° 15W 3000K

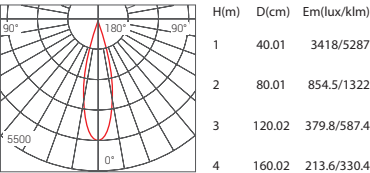

Beam Angle 40° 15W 3000K

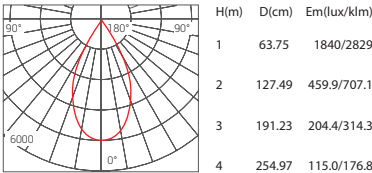

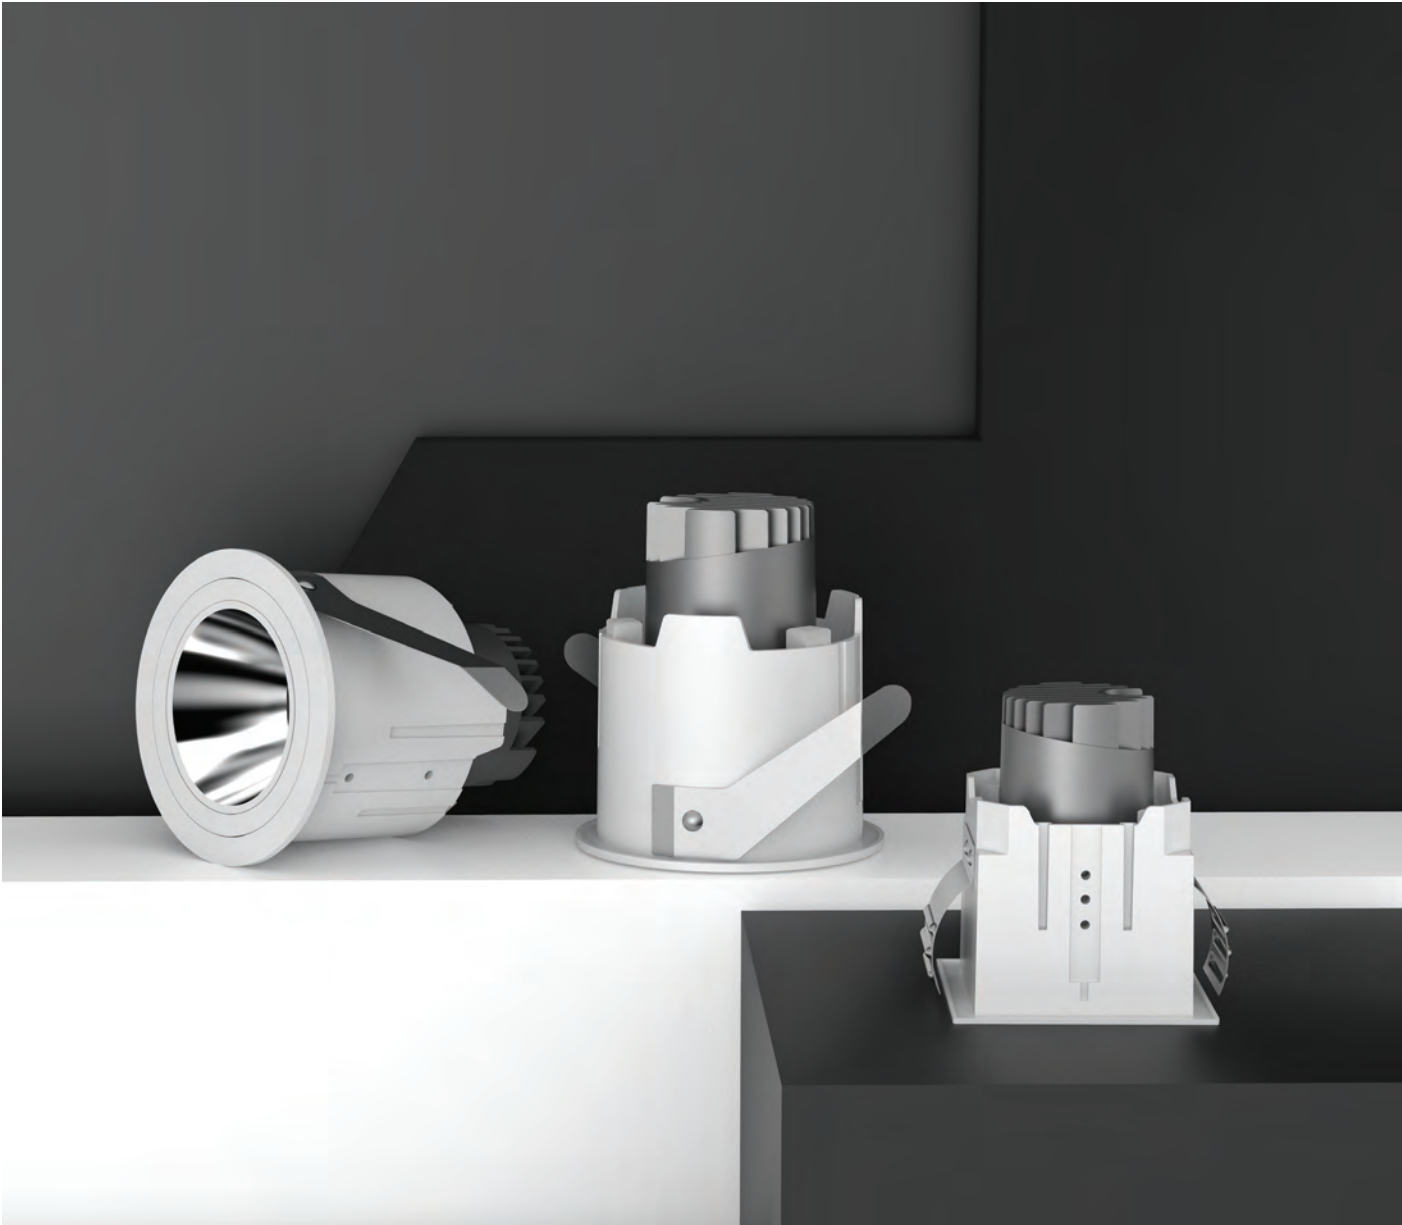



4000K

5000K

- Simple appearance provides a clean and tidy effect.
- Round and square two shapes provide customers selection per requests.
- General lighting or guide for museums, exhibitions, art galleries, offices, residence and also in commercial applications.



New Downlight

The new press device ensures the convenience of disassembly and replacement

- 1


Press mounting, easy to replace.
- 2

Efficient thermal management guarantee long lifespan.
- 3

Different beam angle reflectors available for spot or general lighting effect.



- Colour:
- Sand gold
 - Chrome
 - Black
 - White
 - Silver
- Optional:
- Honey comb

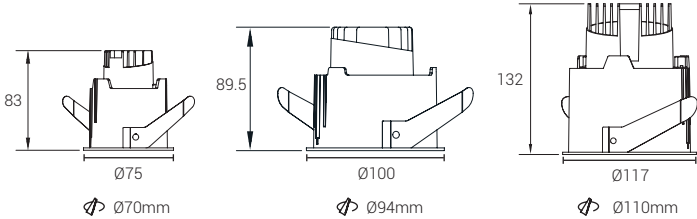

CM-DRE0206W/ DRE0212W/ DRE0220W


Model Code	DRE0206W	DRE0212W	DRE0220W
Power	6W	12W	20W
Cut out	Φ70	Φ94	Φ110
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ75x83mm	Φ100x89mm	Φ117x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 26.4° 6W

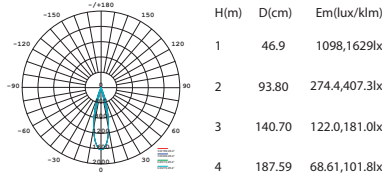


Beam Angle 27.9° 12W

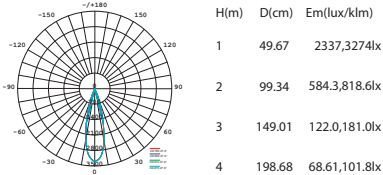

Beam Angle 16.6° 20W

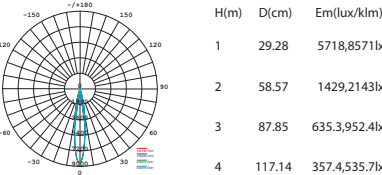

- Colour:
- Sand gold
 - Chrome
 - Black
 - White
 - Silver
- Optional:
- Honey comb

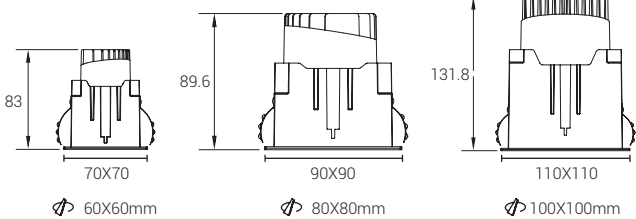

CM-DSE0206W/DSE0212W/DSE0220W


Model Code	DSE0206W	DSE0212W	DSE0220W
Power	6W	12W	20W
Cut out	Φ60X60	Φ80X80	Φ100X100
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ70x70x83mm	Φ90x90x90mm	Φ110x110x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 26.4° 6W

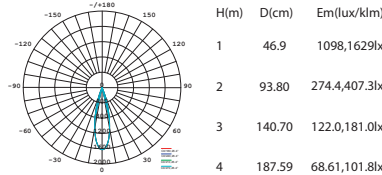


Beam Angle 27.9° 12W

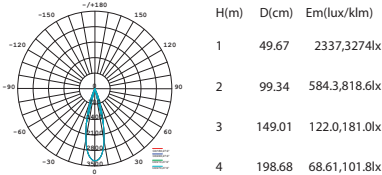

Beam Angle 16.6° 20W

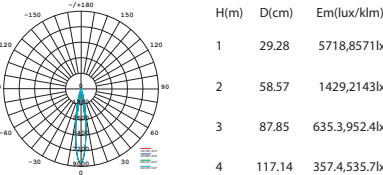

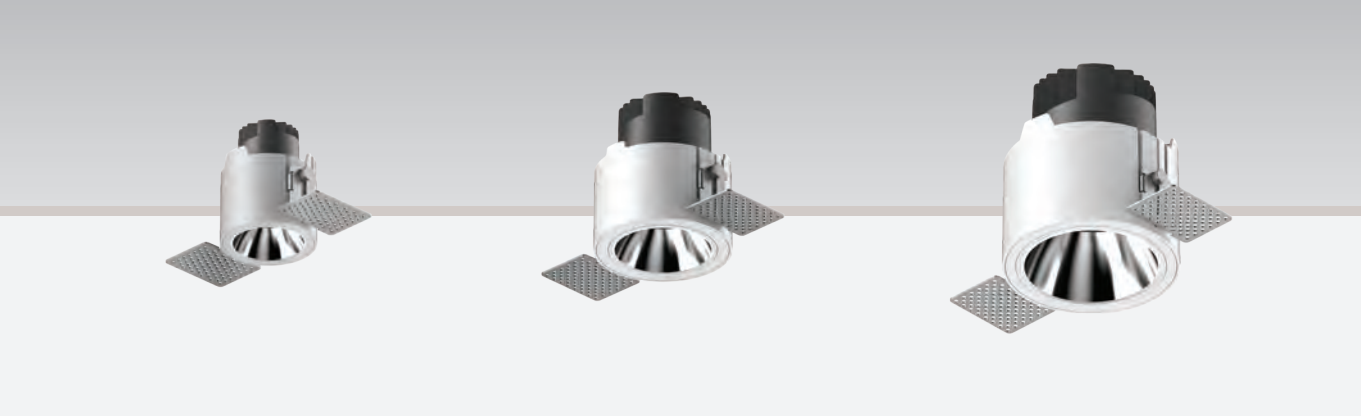


- Colour:
- Sand gold

Chrome

Black

White

Silver
- Optional:
- Honey comb

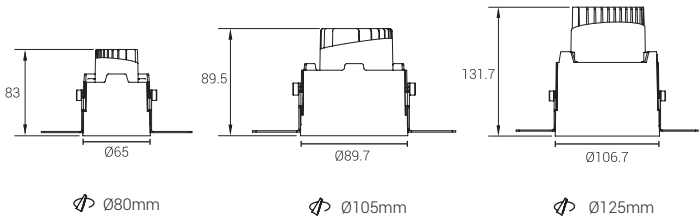

CM-DRT0206W/DRT0212W/DRT0220W


Model Code	DRT0206W	DRT0212W	DRT0220W
Power	6W	12W	20W
Cut out	Φ80	Φ105	Φ125
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ65x83mm	Φ90x90mm	Φ107x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric



Beam Angle 26.4° 6W

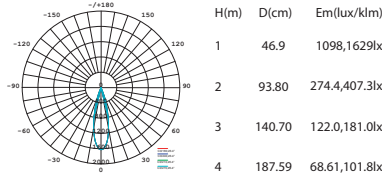

Beam Angle 27.9° 12W

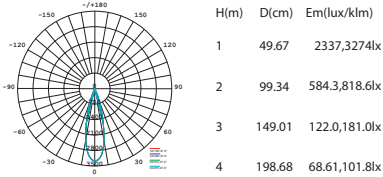

Beam Angle 16.6° 20W

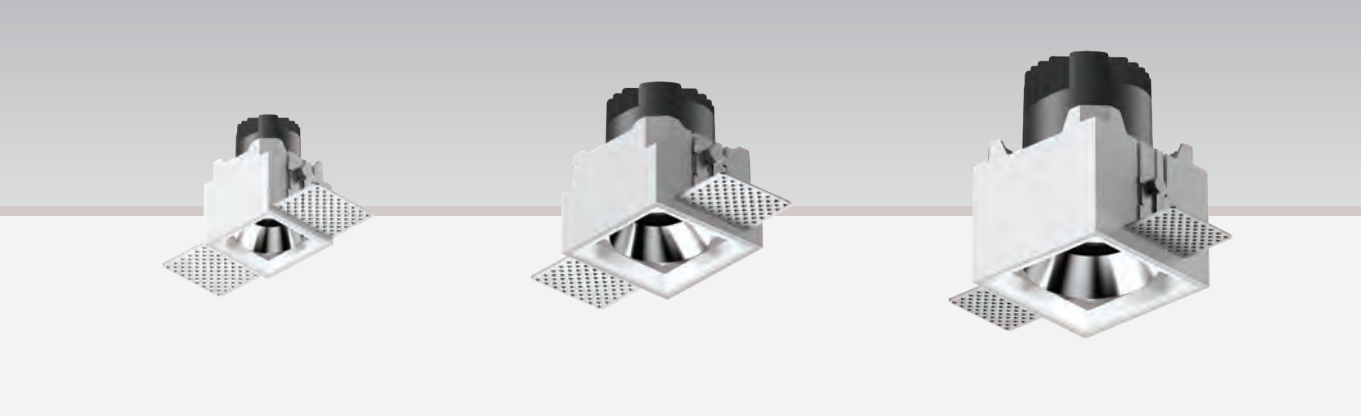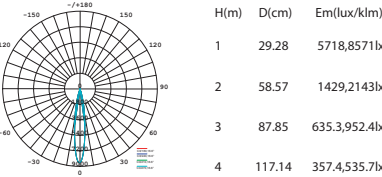


- Colour:
- Sand gold

Chrome

Black

White

Silver
- Optional:
- Honey comb

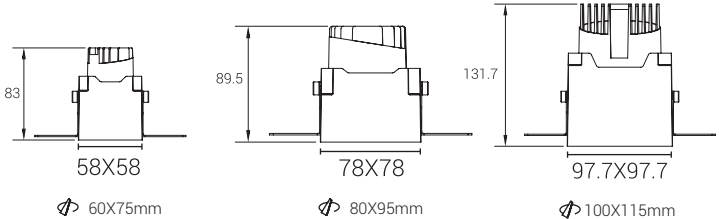

CM-DST0206W/DST0212W/DST0220W


Model Code	DST0206W	DST0212W	DST0220W
Power	6W	12W	20W
Cut out	Φ60X75	Φ80X95	Φ100X115
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ58x58x83mm	Φ78x78x90mm	Φ98x98x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 26.4° 6W

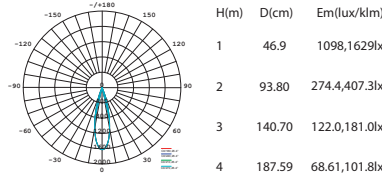


Beam Angle 27.9° 12W

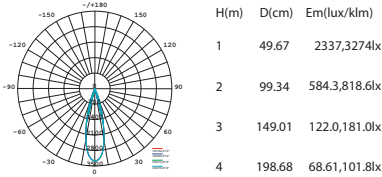


Beam Angle 16.6° 20W

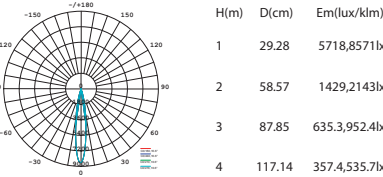

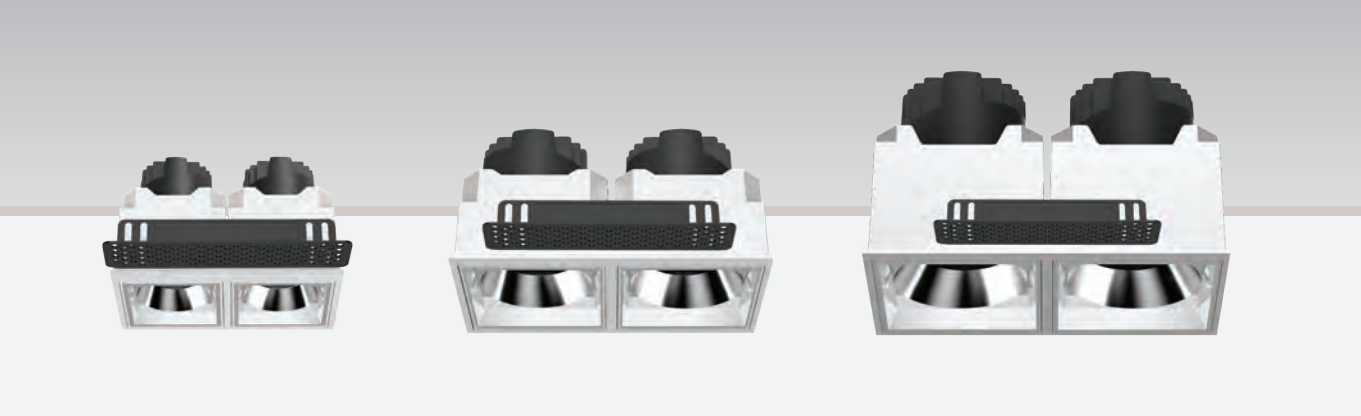

Colour:  Sand gold  Chrome  Black  White  Silver

Optional:  Honey comb

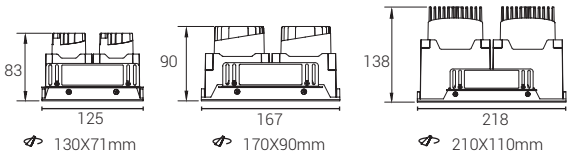



CM-DST0206W-2/ DST0212W-2/ DST0220W-2

Model Code	DST0206W-2	DST0212W-2	DST0220W-2
Power	2X6W	2X12W	2X20W
Cut out	130X71	170X90	210X110
Light Source	CREE	CREE	CREE
Size(LxWxH)	117X125X83mm	137X167X90mm	158X218X132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric

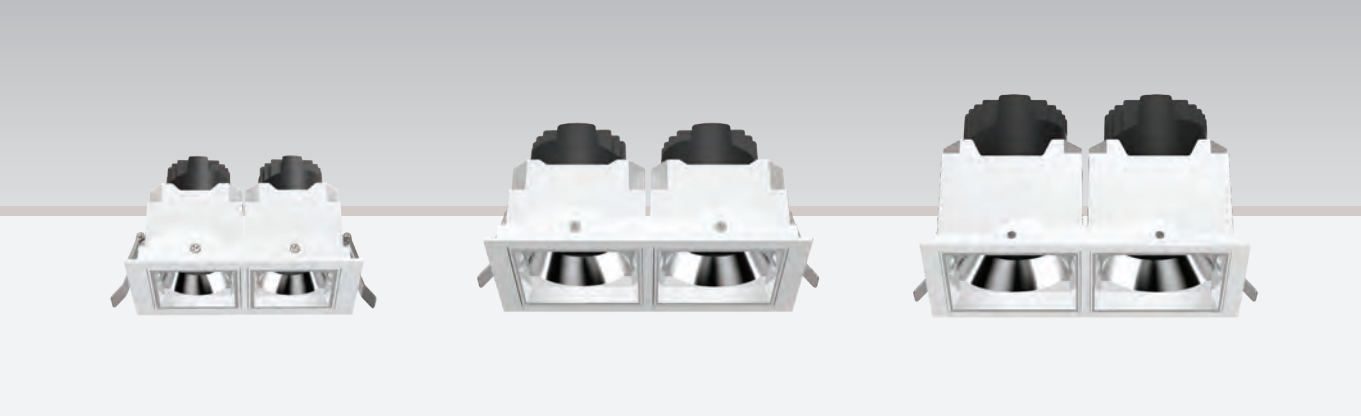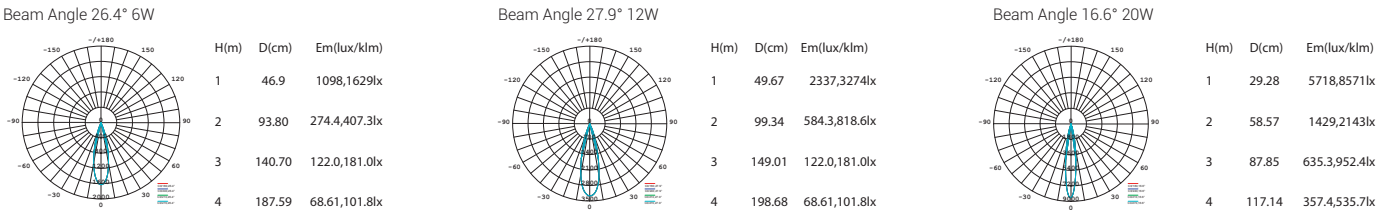

Colour:  Sand gold  Chrome  Black  White  Silver

Optional:  Honey comb

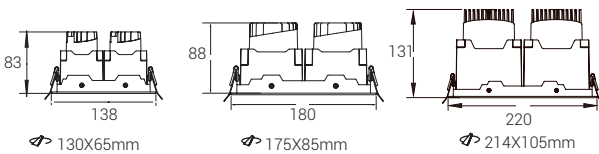


CM-DSE0206W-2/ DSE0212W-2/ DSET0220W-2

Model Code	DSE0206W-2	DSE0212W-2	DSE0220W-2
Power	2X6W	2X12W	2X20W
Cut out	130X65	175X85	214X105
Light Source	CREE	CREE	CREE
Size(LxWxH)	71X139X83mm	91X181X88mm	111X220X132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20


Photometric

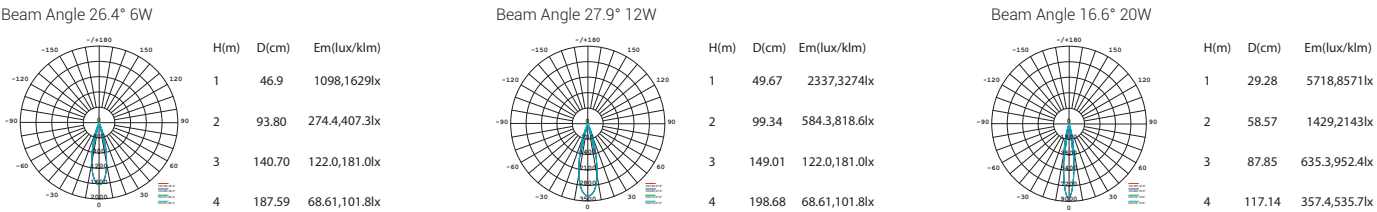



Colour:

Optional:

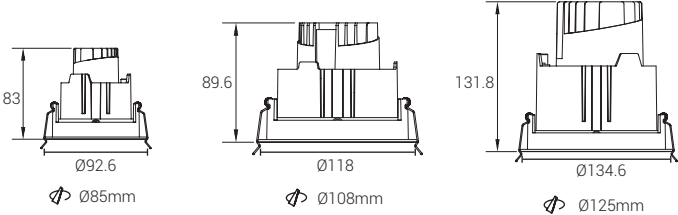



CM-DRE0406W/ DRE0412W/ DRE0420W

Model Code	DRE0406W	DRE0412W	DRE0420W
Power	6W	12W	20W
Cut out	Φ85	Φ108	Φ125
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ93x83mm	Φ118x90mm	Φ135x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric

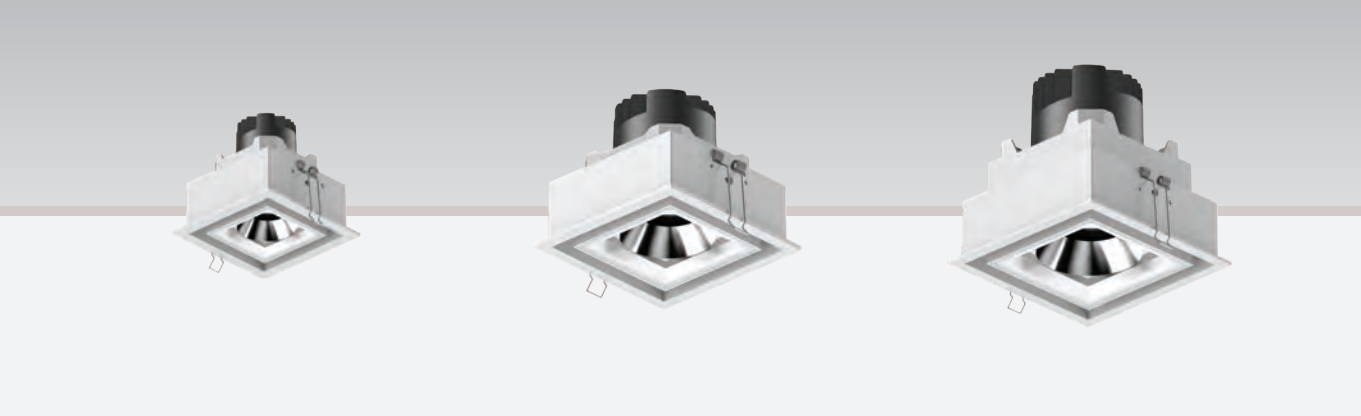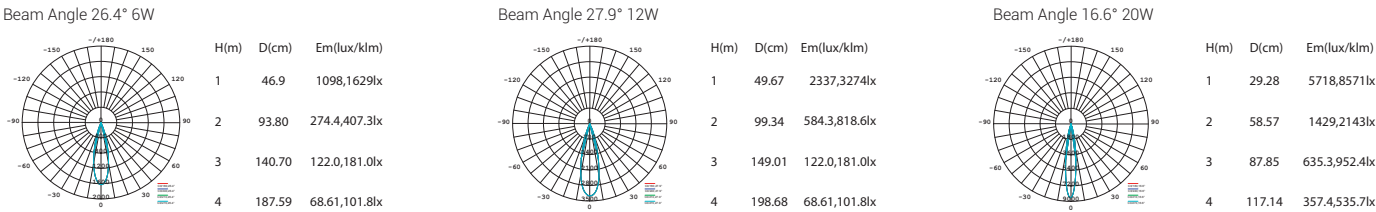

Colour:

Optional:

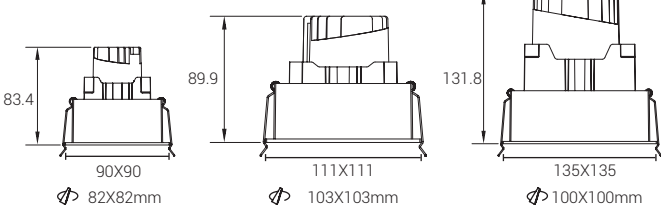


CM-DSE0406W/DSE0412W/DSE0420W

Model Code	DSE0406W	DSE0412W	DSE0420W
Power	6W	12W	20W
Cut out	Φ82X82	Φ103X103	Φ125X125
Light Source	CREE	CREE	CREE
Size(LxWxH)	91x91x84mm	111x111x90mm	Φ135x135x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20


Photometric

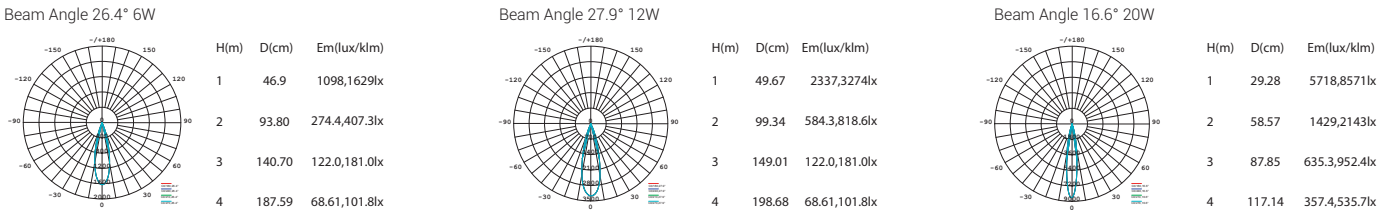



Colour:     

Sand gold Chrome Black White Silver

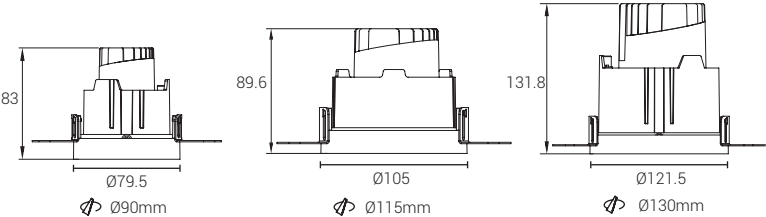

CM-DRT0406W/ DRT0412W/ DRT0420W


Model Code	DRT0406W	DRT0412W	DRT0420W
Power	6W	12W	20W
Cut out	Φ90	Φ115	Φ130
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ80x83mm	Φ105x90mm	Φ122x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 26.4° 6W

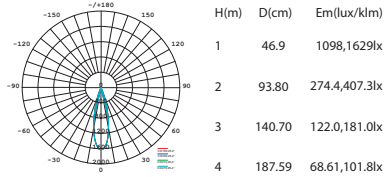

Beam Angle 27.9° 12W

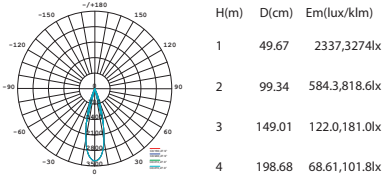


Beam Angle 16.6° 20W

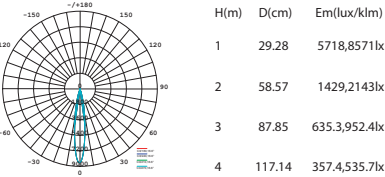

Colour:     

Sand gold Chrome Black White Silver

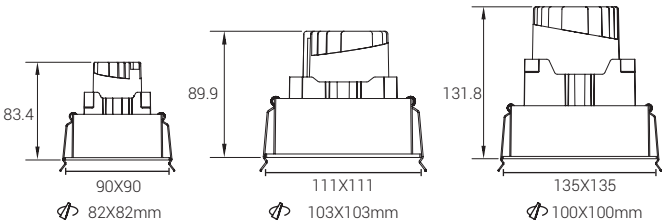

CM-DST0406W/ DST0412W/ DST0420W


Model Code	DST0406W	DST0412W	DST0420W
Power	6W	12W	20W
Cut out	Φ85X85	Φ110X110	Φ130X130
Light Source	CREE	CREE	CREE
Size(LxWxH)	78x78x84mm	99x99x90mm	Φ122x122x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 26.4° 6W

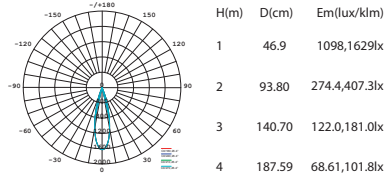

Beam Angle 27.9° 12W

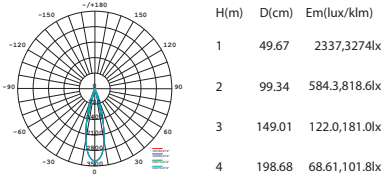

Beam Angle 16.6° 20W

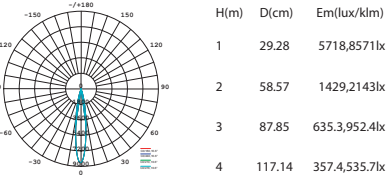




- Colour:
- Sand gold

Chrome

Black

White

Silver

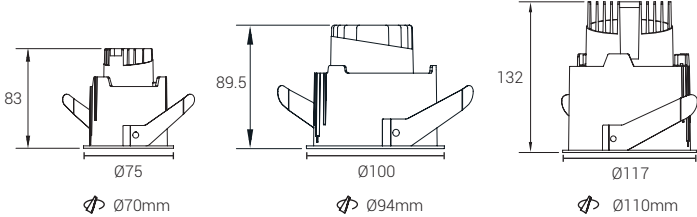

CM-PRE0206W/ PRE0212W/ PRE0220W


Model Code	PRE0206W	PRE0212W	PRE0220W
Power	6W	12W	20W
Cut out	Φ70	Φ94	Φ110
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ75x83mm	Φ100x89mm	Φ117x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	倾角 15°	倾角 15°	倾角 15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 36.4° 6W

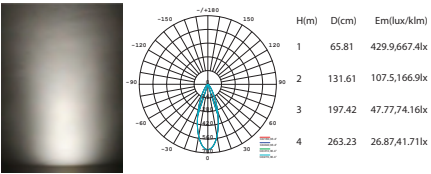

Beam Angle 34.4° 12W

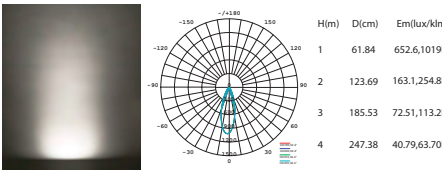

Beam Angle 36.5° 20W

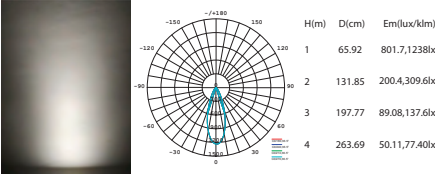


- Colour:
- Sand gold

Chrome

Black

White

Silver

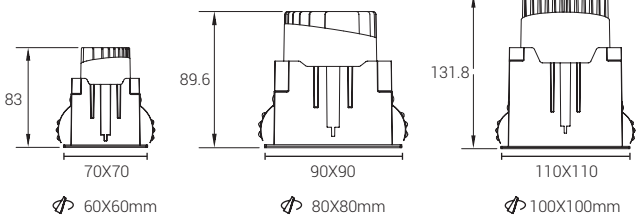

CM-PSE0206W/ PSE0212W/ PSE0220W


Model Code	PSE0206W	PSE0212W	PSE0220W
Power	6W	12W	20W
Cut out	Φ60X60	Φ80X80	Φ100X100
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ70x70x83mm	Φ90x90x90mm	Φ110x110x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	倾角 15°	倾角 15°	倾角 15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 36.4° 6W

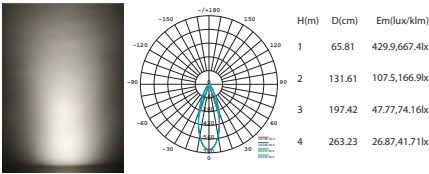


Beam Angle 34.4° 12W

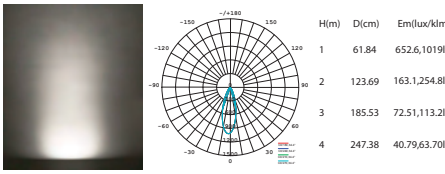

Beam Angle 36.5° 20W

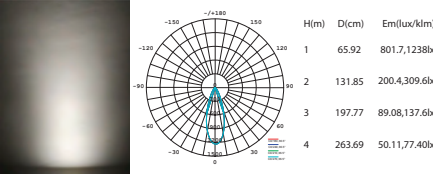

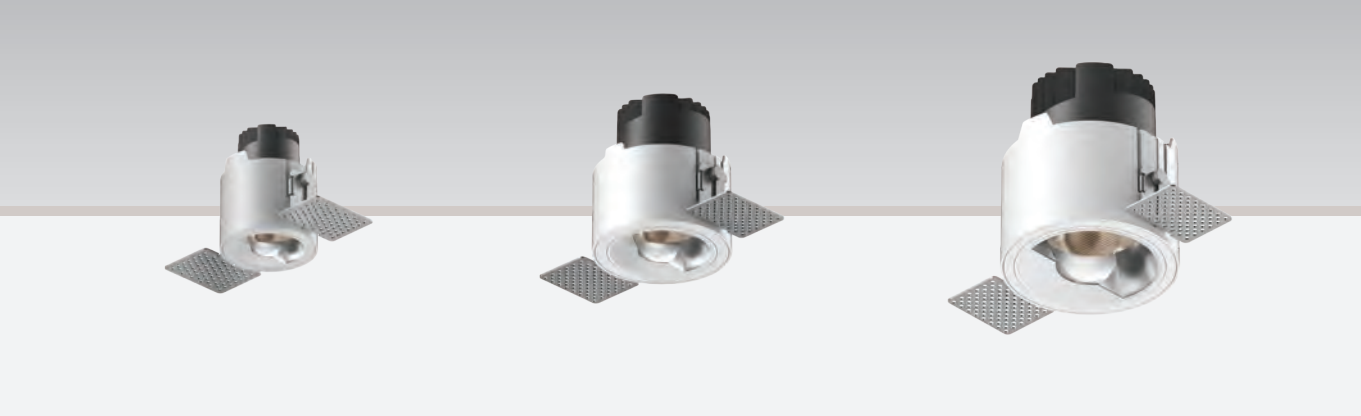


- Colour:
- Sand gold

Chrome

Black

White

Silver

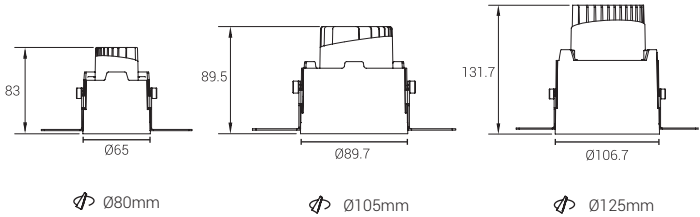

CM-PRT0206W/ PRT0212W/ PRT0220W


Model Code	PRT0206W	PRT0212W	PRT0220W
Power	6W	12W	20W
Cut out	Φ80	Φ105	Φ125
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ65x83mm	Φ90x90mm	Φ107x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°	15°	15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric



Beam Angle 36.4° 6W

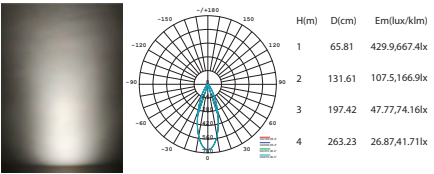

Beam Angle 34.4° 12W

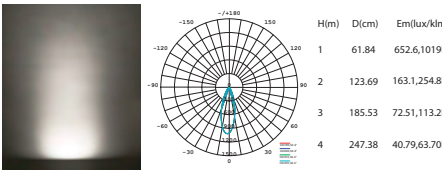

Beam Angle 36.5° 20W

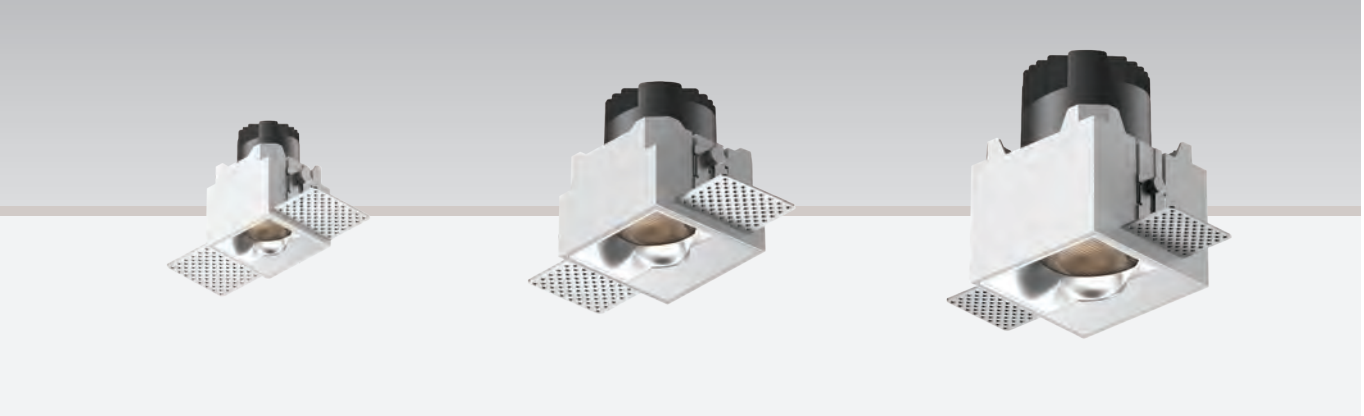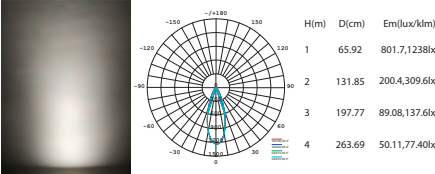


- Colour:
- Sand gold

Chrome

Black

White

Silver

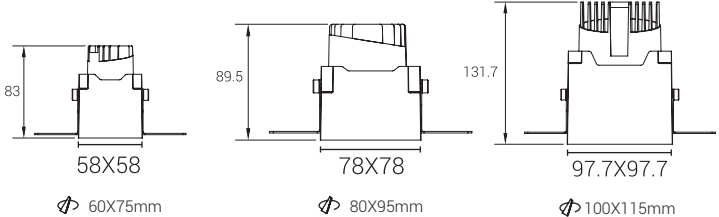

CM-PST0206W/ PST0212W/ PST0220W


Model Code	PST0206W	PST0212W	PST0220W
Power	6W	12W	20W
Cut out	Φ60X75	Φ80X95	Φ100X115
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ58x58x83mm	Φ78x78x90mm	Φ98x98x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°	15°	15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 36.4° 6W

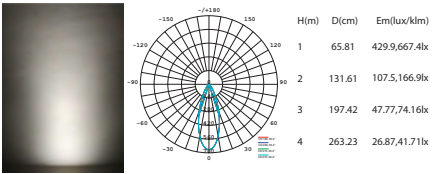


Beam Angle 34.4° 12W

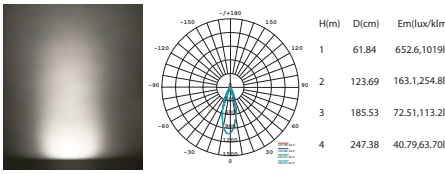


Beam Angle 36.5° 20W

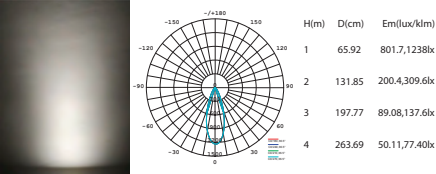

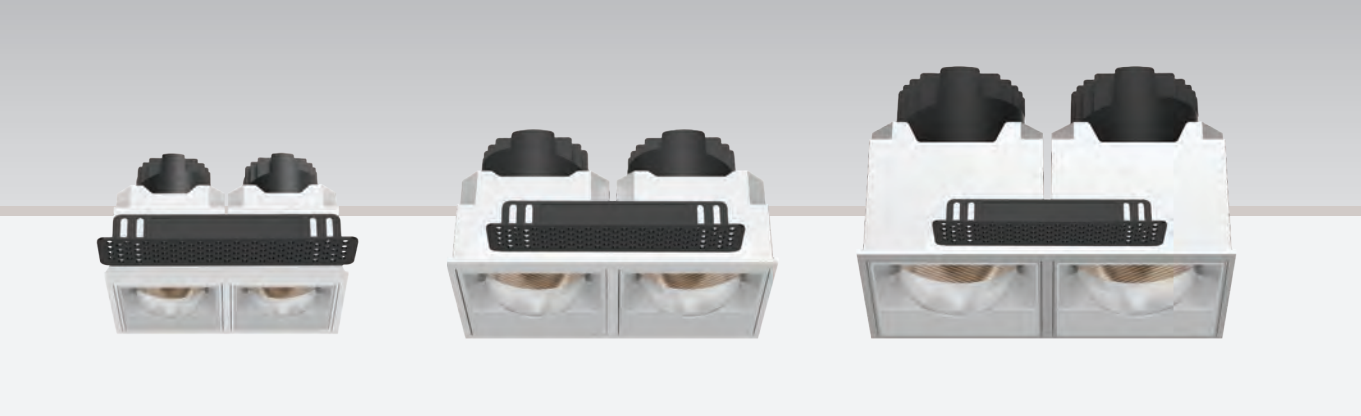

Colour:

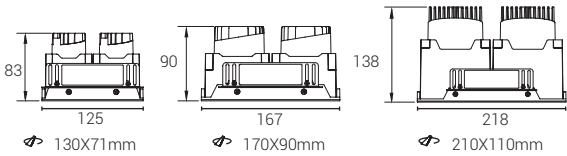

CM-PST0206W-2/ PST0212W-2/ PST0220W-2


Model Code	PST0206W-2	PST0212W-2	PST0220W-2
Power	2X6W	2X12W	2X20W
Cut out	130X71	170X90	210X110
Light Source	CREE	CREE	CREE
Size(LxWxH)	117X125X83mm	137X167X90mm	158X218X132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°	15°	15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric



Beam Angle 36.4° 6W

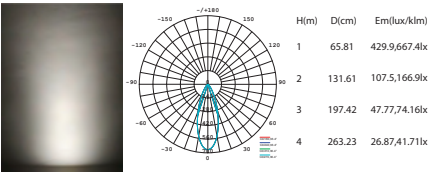


Beam Angle 34.4° 12W

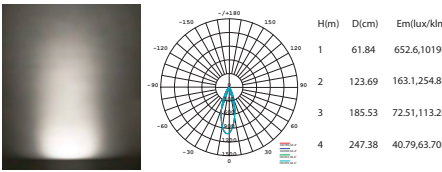

Beam Angle 36.5° 20W

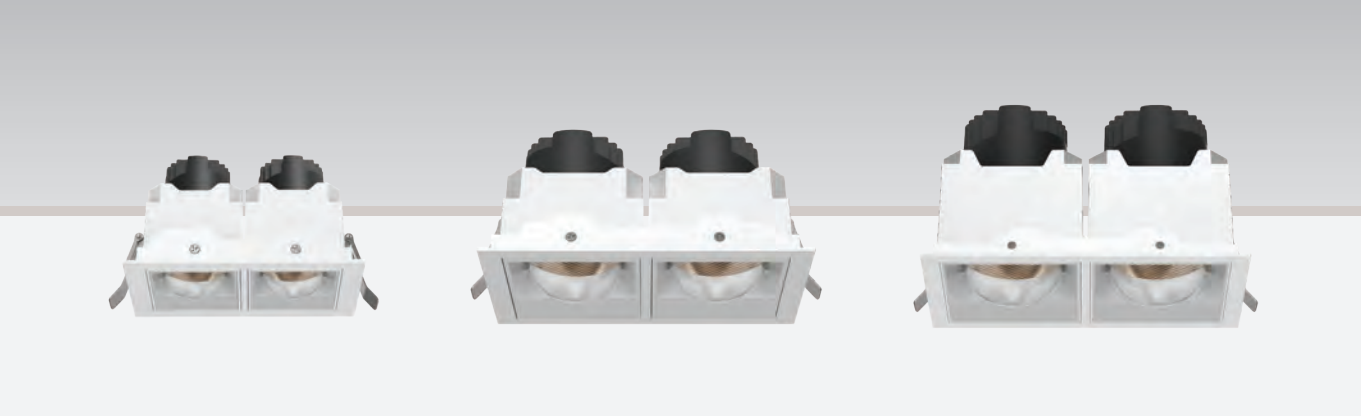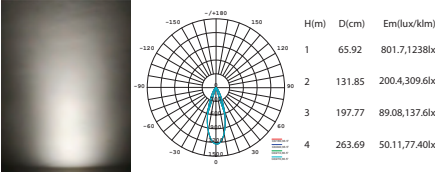

Colour:

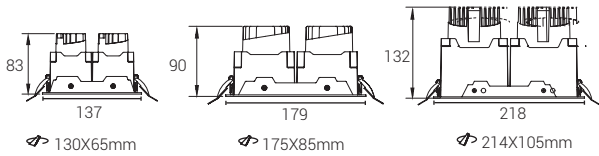

CM-PSE0206W-2/ PSE0212W-2/ PSE0220W-2


Model Code	PSE0206W-2	PSE0212W-2	PSE0220W-2
Power	2X6W	2X12W	2X20W
Cut out	130X65	175X85	214X105
Light Source	CREE	CREE	CREE
Size(LxWxH)	71X139X83mm	91X181X90mm	111X220X132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°	15°	15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 36.4° 6W

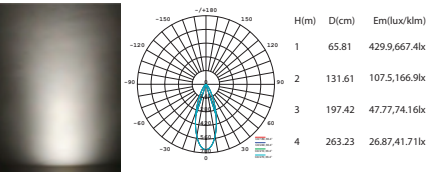

Beam Angle 34.4° 12W

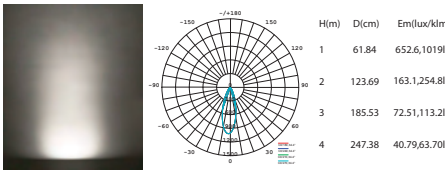

Beam Angle 36.5° 20W

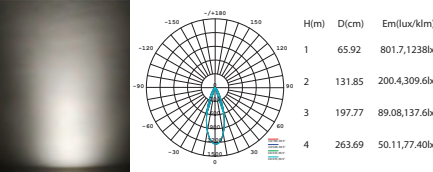



Colour:


Sand gold

Chrome

Black

White

Silver

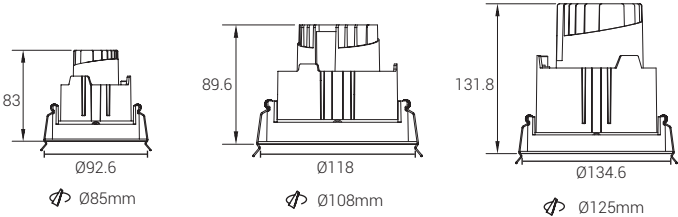

CM-PRE0406W/ PRE0412W/ PRE0420W


Model Code	PRE0406W	PRE0412W	PRE0420W
Power	6W	12W	20W
Cut out	Φ85	Φ108	Φ125
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ93x83mm	Φ118x90mm	Φ135x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°	15°	15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20 / IP65	IP20 / IP65	IP20 / IP65

Photometric


Beam Angle 36.4° 6W

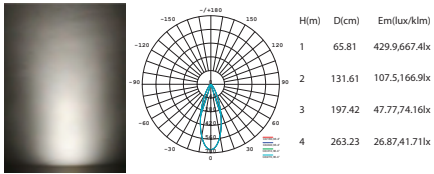

Beam Angle 34.4° 12W

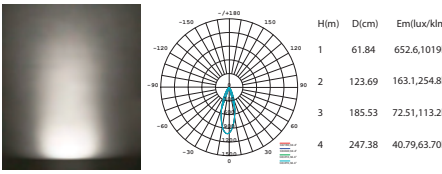

Beam Angle 36.5° 20W

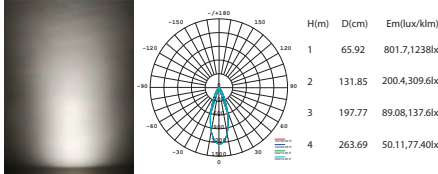

Colour:


Sand gold

Chrome

Black

White

Silver

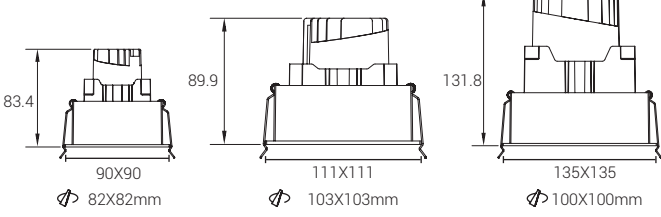

CM-PSE0406W/ PSE0412W/ PSE0420W


Model Code	PSE0406W	PSE0412W	PSE0420W
Power	6W	12W	20W
Cut out	Φ82X82	Φ103X103	Φ125X125
Light Source	CREE	CREE	CREE
Size(LxWxH)	91x91x84mm	111x111x90mm	Φ135x135x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°	15°	15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 36.4° 6W

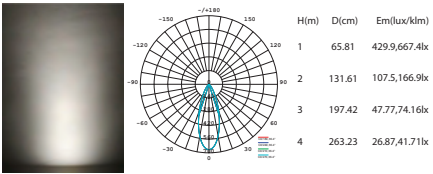

Beam Angle 34.4° 12W

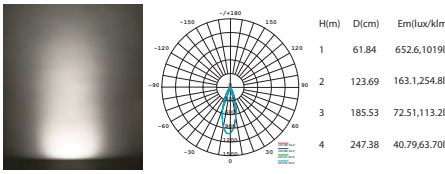


Beam Angle 36.5° 20W

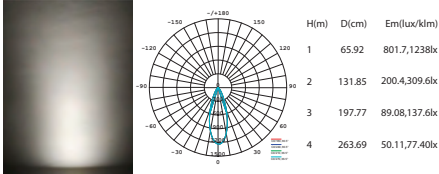



Colour:     

Sand gold Chrome Black White Silver

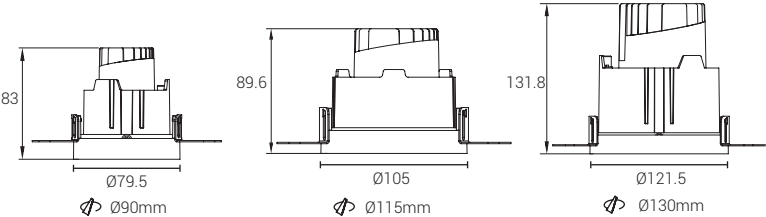

CM-PRT0406W/ PRT0412W/ PRT0420W


Model Code	PRT0406W	PRT0412W	PRT0420W
Power	6W	12W	20W
Cut out	Φ90	Φ115	Φ130
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ80x83mm	Φ105x90mm	Φ122x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°	15°	15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 36.4° 6W

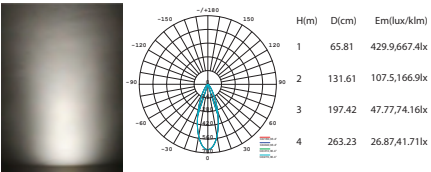

Beam Angle 34.4° 12W

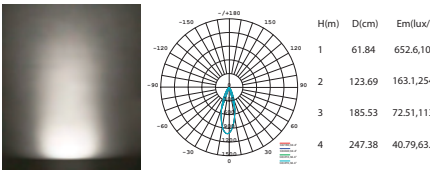


Beam Angle 36.5° 20W

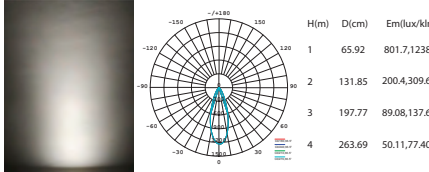

Colour:     

Sand gold Chrome Black White Silver

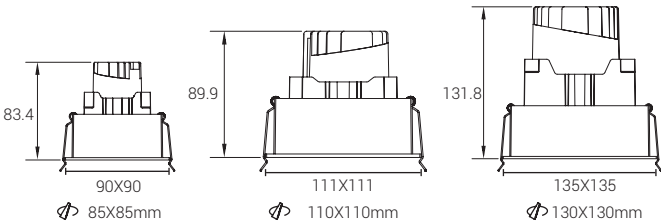

CM-PST0406W/ PST0412W/ PST0420W


Model Code	PST0406W	PST0412W	PST0420W
Power	6W	12W	20W
Cut out	Φ85X85	Φ110X110	Φ130X130
Light Source	CREE	CREE	CREE
Size(LxWxH)	78x78x84mm	99x99x90mm	Φ122x122x132mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°	15°	15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 36.4° 6W

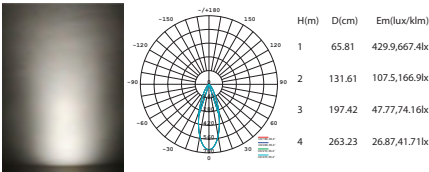

Beam Angle 34.4° 12W

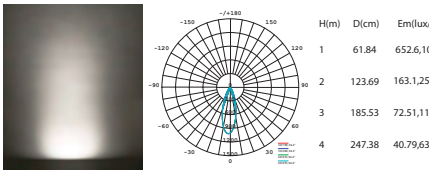


Beam Angle 36.5° 20W

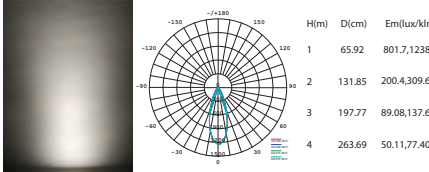



- Colour:
-
- Sand gold Chrome Black White Silver
- Optional:
-
- Honey comb

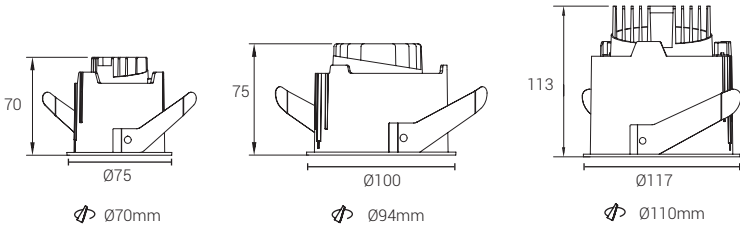


CM-FRE0206W/ FRE0212W/ FRE0220W


Model Code	FRE0206W	FRE0212W	FRE0220W
Power	6W	12W	20W
Cut out	Φ70	Φ94	Φ110
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ75x70mm	Φ100x75mm	Φ117x113mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	60°	60°	60°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

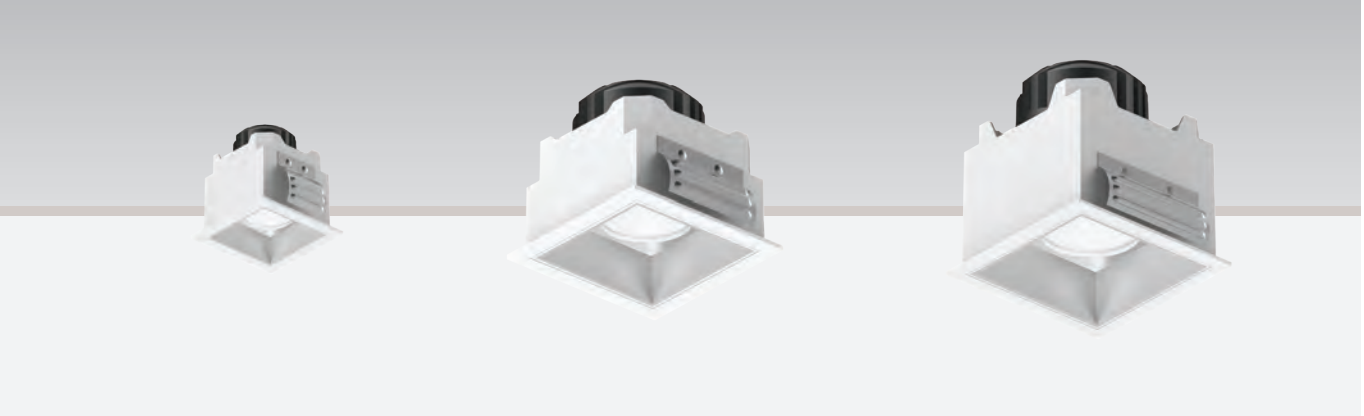

- Colour:
-
- Sand gold Chrome Black White Silver
- Optional:
-
- Honey comb

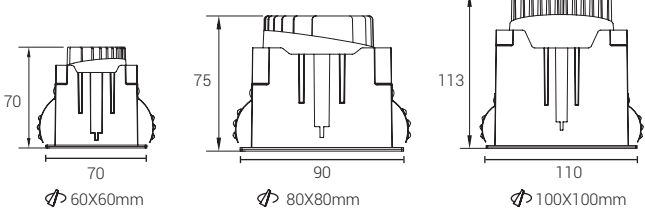


FSE0206W/FSE0212W/FSE0220W

Model Code	FSE0206W	FSE0212W	FSE0220W
Power	6W	12W	20W
Cut out	Φ60X60	Φ80X80	Φ100X100
Light Source	CREE	CREE	CREE
Size(LxWxH)	70x70x70mm	90x90x75mm	Φ110x110x113mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	60°	60°	60°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

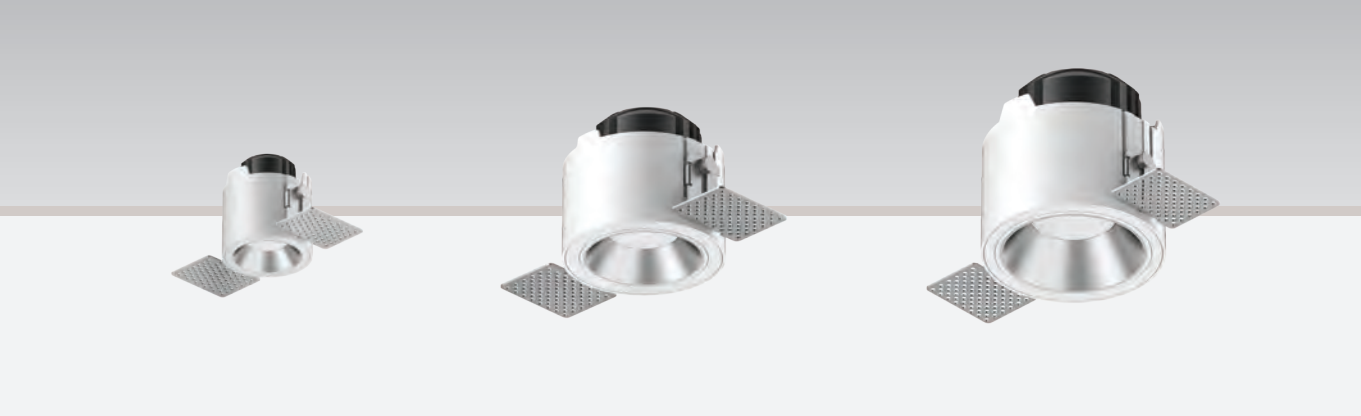


- Colour:
- Sand gold

Chrome

Black

White

Silver
- Optional:
- Honey comb

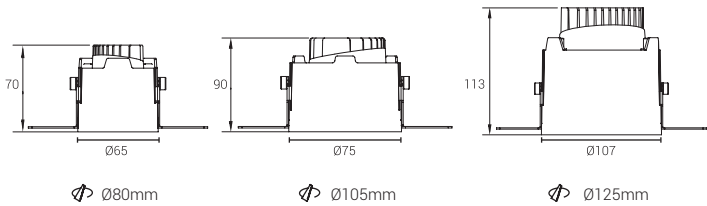


CM-FRT0206W/ FRT0212W/ FRT0220W

Model Code	FRT0206W	FRT0212W	FRT0220W
Power	6W	12W	20W
Cut out	Φ80	Φ105	Φ125
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ65x70mm	Φ90x75mm	Φ107x113mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	60°	60°	60°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

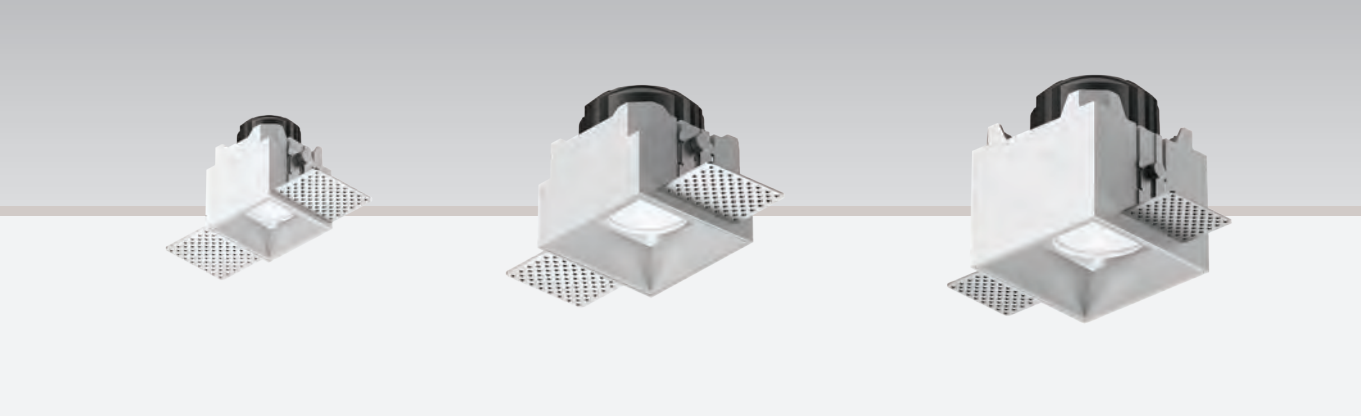


- Colour:
- Sand gold

Chrome

Black

White

Silver
- Optional:
- Honey comb

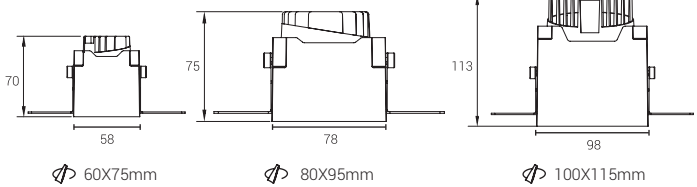


CM-FST0206W/ FST0212W/ FST0220W

Model Code	FST0206W	FST0212W	FST0220W
Power	6W	12W	20W
Cut out	Φ60X75	Φ80X95	Φ100X115
Light Source	CREE	CREE	CREE
Size(LxWxH)	58x58x70mm	78x78x75mm	Φ98x98x113mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	60°	60°	60°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

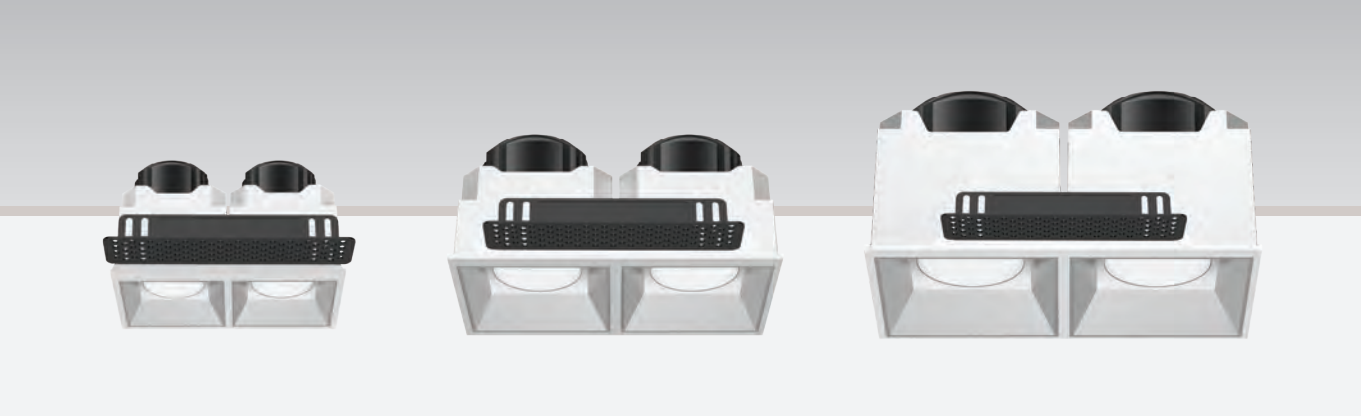

Colour:

Sand gold

Chrome

Black

White

Silver

Optional:

Honey comb

73

125

130X71mm

80

167

170X90mm

117

218


210X110mm

CM-FST0206W-2/FST0212W-2/FST0220W-2

Model Code	FST0206W-2	FST0212W-2	FST0220W-2
Power	2X6W	2X12W	2X20W
Cut out	130X71	170X90	210X110
Light Source	CREE	CREE	CREE
Size(LxWxH)	117X125X73mm	137X167X80mm	158X218X117mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	60°	60°	60°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

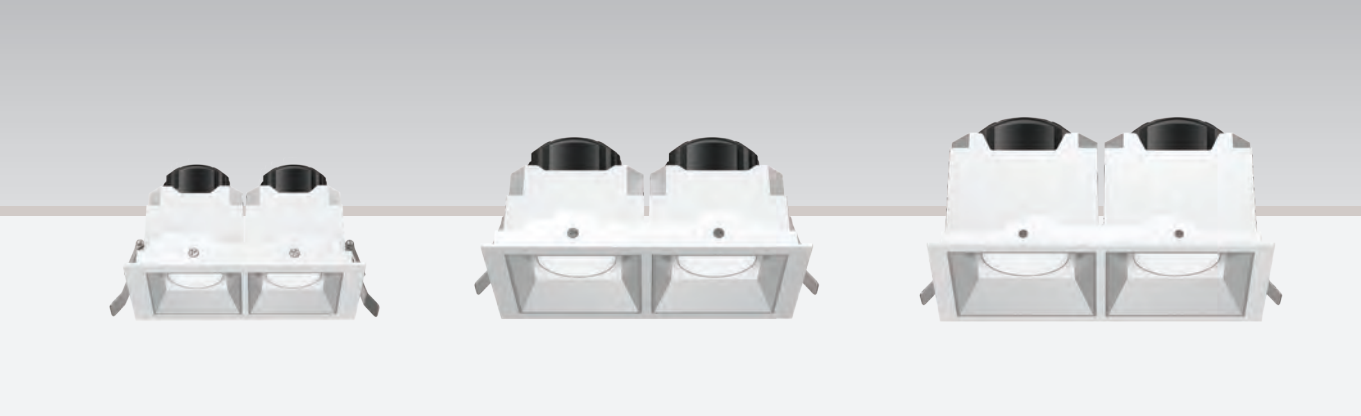

Colour:

Sand gold

Chrome

Black

White

Silver

Optional:

Honey comb

73

137

130X65mm

80

179

175X85mm

117

218

214X105mm

CM-FSE0406W-2/FSE0412W-2/FSE0420W-2

Model Code	FSE0406W-2	FSE0412W-2	FSE0420W-2
Power	2X6W	2X12W	2X20W
Cut out	130X65	175X85	214X105
Light Source	CREE	CREE	CREE
Size(LxWxH)	71X139X83mm	91X181X90mm	111X220X132mm


UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	60°	60°	60°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20



Colour:  Sand gold  Chrome  Black  White  Silver

Optional:  Honey comb

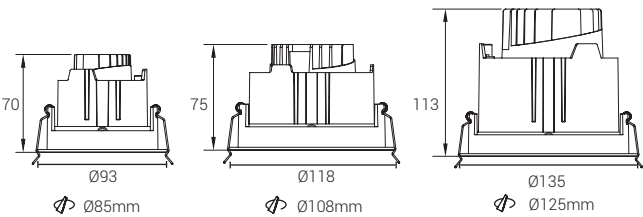


CM-FRE0406W/ FRE0412W/ FRE0420W

Model Code	FRE0406W	FRE0412W	FRE0420W
Power	6W	12W	20W
Cut out	Φ85	Φ108	Φ125
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ93x70mm	Φ118x75mm	Φ135x113mm


UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	60°	60°	60°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

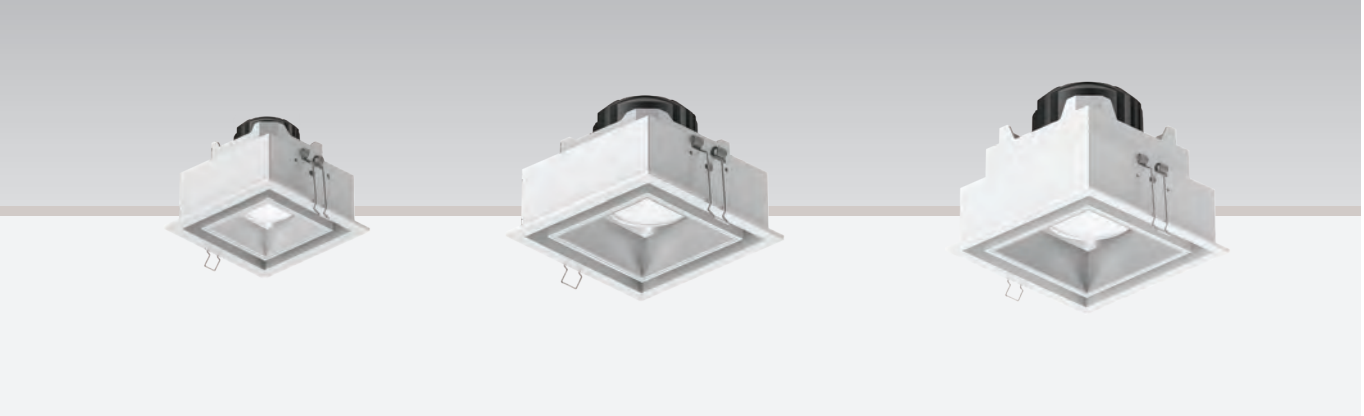

Colour:  Sand gold  Chrome  Black  White  Silver

Optional:  Honey comb

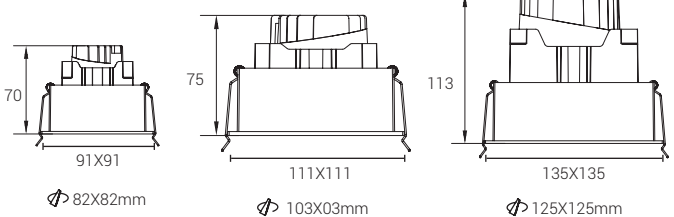

CM-FSE0406W/ FSE0412W/ FSE0420W

Model Code	FSE0406W	FSE0412W	FSE0420W
Power	6W	12W	20W
Cut out	Φ82X82	Φ103X103	Φ125X125
Light Source	CREE	CREE	CREE
Size(LxWxH)	91x91x70mm	111x111x75mm	Φ135x135x113mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	60°	60°	60°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20




- Colour:
-
- Sand gold

Chrome

Black

White

Silver
- Optional:
-
- Honey comb

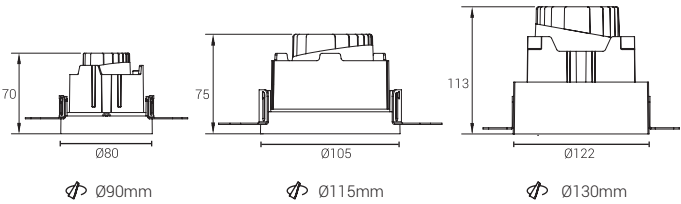

CM-FRT0406W/ FRT0412W/ FRT0420W

Model Code	FRT0406W	FRT0412W	FRT0420W
Power	6W	12W	20W
Cut out	$\Phi 90$	$\Phi 115$	$\Phi 130$
Light Source	CREE	CREE	CREE
Size(LxWxH)	$\Phi 80\times 70$ mm	$\Phi 105\times 75$ mm	$\Phi 122\times 113$ mm

UGR	<19	<19	<19
CRI	$\geq 80/\geq 90$	$\geq 80/\geq 90$	$\geq 80/\geq 90$
Beam angle	60°	60°	60°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20




- Colour:
-
- Sand gold

Chrome

Black

White

Silver
- Optional:
-
- Honey comb

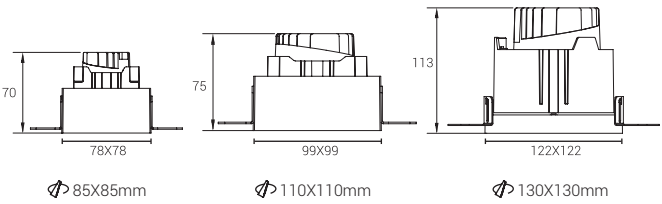

CM-FST0406W/ FST0412W/ FST0420W


Model Code	FST0406W	FST0412W	FST0420W
Power	6W	12W	20W
Cut out	$\Phi 85\times 85$	$\Phi 110\times 110$	$\Phi 130\times 130$
Light Source	CREE	CREE	CREE
Size(LxWxH)	78x78x70mm	99x99x75mm	$\Phi 122\times 122\times 113$ mm

UGR	<19	<19	<19
CRI	$\geq 80/\geq 90$	$\geq 80/\geq 90$	$\geq 80/\geq 90$
Beam angle	60°	60°	60°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20



- Colour:
-
- Sand gold Chrome Black White Silver
- Optional:
-
- Honey comb

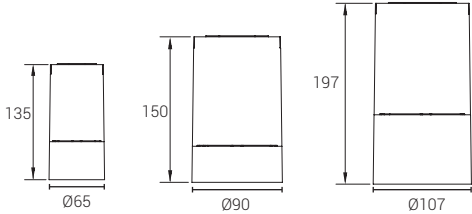


CM-DRS0206W/ DRS0212W/ DRS0220W

Model Code	DRS0206W	DRS0212W	DRS0220W
Power	6W	12W	20W
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ65x135mm	Φ90x150mm	Φ107x197mm


UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15° /24° /38°	15° /24° /38°	15° /24° /38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric

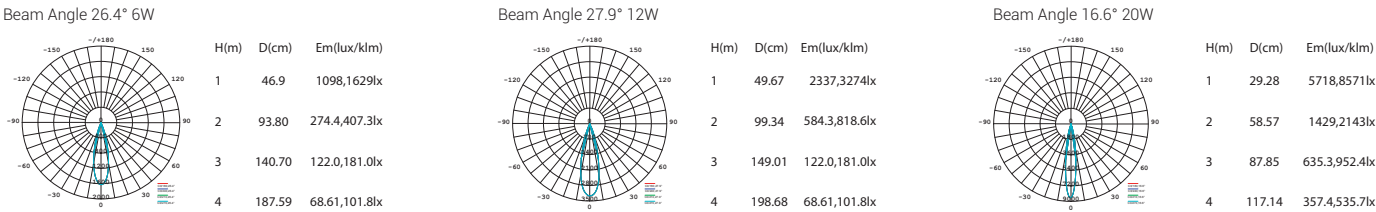

- Colour:
-
- Sand gold Chrome Black White Silver
- Optional:
-
- Honey comb

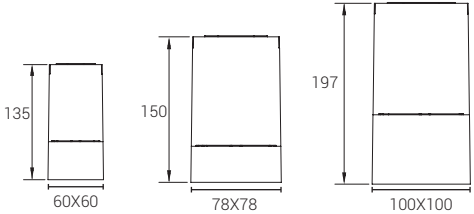


CM-DSS0206W/ DSS0212W/ DSS0220W

Model Code	DSS0206W	DSS0212W	DSS0220W
Power	6W	12W	20W
Light Source	CREE	CREE	CREE
Size(LxWxH)	60x60x135mm	78x78x150mm	100x100x195mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15° /24° /38°	15° /24° /38°	15° /24° /38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric

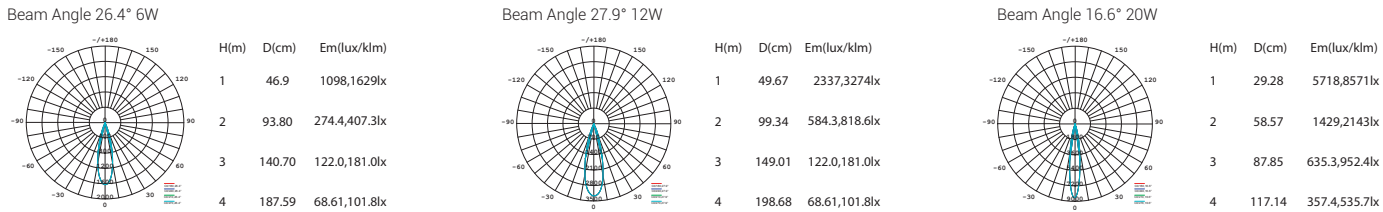



Colour:

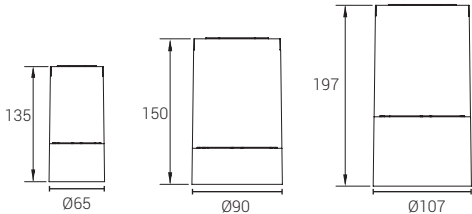

CM-PRS0206W/ PRS0212W/ PRS0220W


Model Code	PRS0206W	PRS0212W	PRS0220W
Power	6W	12W	20W
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ65x135mm	Φ90x150mm	Φ107x197mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°	15°	15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 36.4° 6W

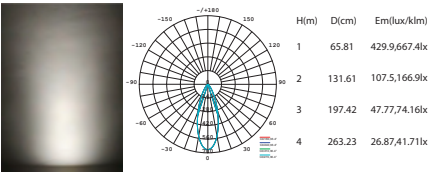


Beam Angle 34.4° 12W

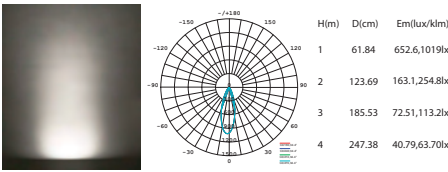

Beam Angle 36.5° 20W

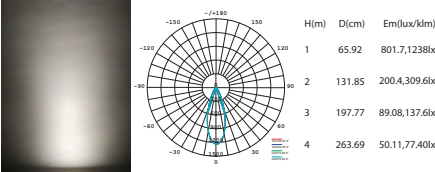

Colour:

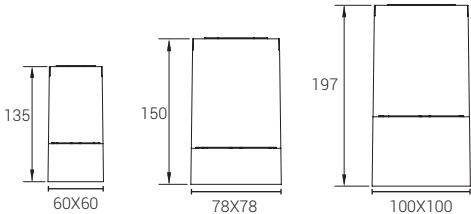

CM-PSS0206W/ PSS0212W/ PSS0220W


Model Code	PSS0206W	PSS0212W	PSS0220W
Power	6W	12W	20W
Light Source	CREE	CREE	CREE
Size(LxWxH)	60x60x135mm	78x78x150mm	100x100x195mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	倾角 15°	倾角 15°	倾角 15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

配光参数 Photometric


Beam Angle 36.4° 6W

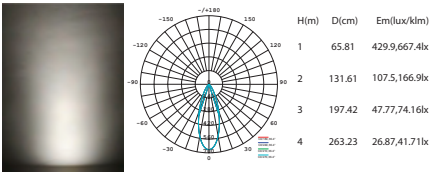

Beam Angle 34.4° 12W

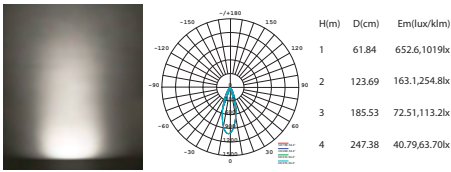


Beam Angle 36.5° 20W

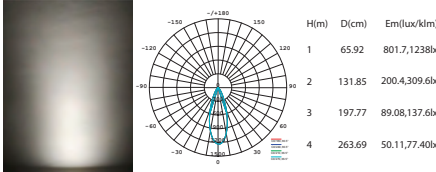



- Colour:
-  Sand gold
-  Chrome
-  Black
-  White
-  Silver

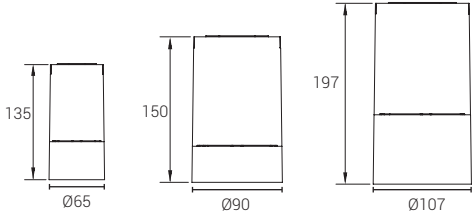


CM-FRS0206W/ FRS0212W/ FRS0220W


Model Code	FRS0206W	FRS0212W	FRS0220W
Power	6W	12W	20W
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ65x135mm	Φ90x150mm	Φ107x197mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	60°	60°	60°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

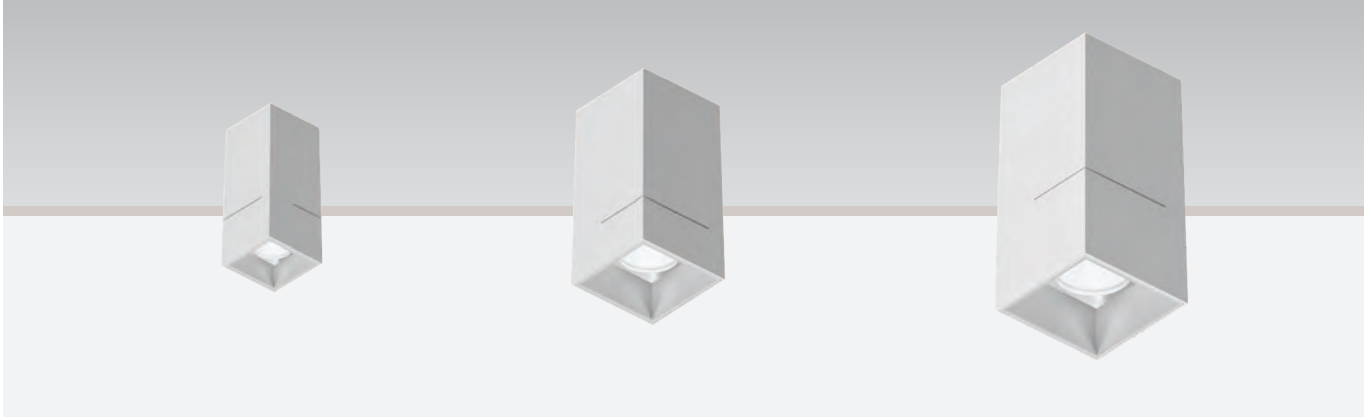

- Colour:
-  Sand gold
-  Chrome
-  Black
-  White
-  Silver

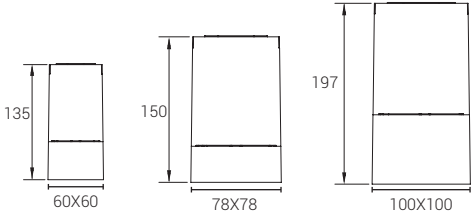

CM-FSS0206W/ FSS0212W/ FSS0220W


Model Code	FSS0206W	FSS0212W	FSS0220W
Power	6W	12W	20W
Light Source	CREE	CREE	CREE
Size(LxWxH)	60x60x135mm	78x78x150mm	100x100x195mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	60°	60°	60°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20



- Colour:
-
- Sand gold Chrome Black White Silver
- Optional:
-
- Honey comb

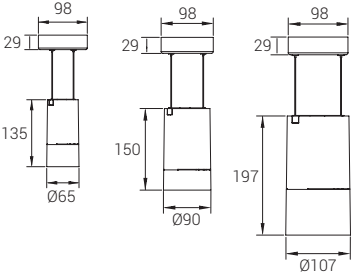

CM-DRS0206W-K/ DRS0212W-K/ DRS0220W-K


Model Code	DRS0206W-K	DRS0212W-K	DRS0220W-K
Power	6W	12W	20W
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ65x135x1000mm	Φ90x150x1000mm	Φ107x197x1000mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15° /24° /38°	15° /24° /38°	15° /24° /38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric



Beam Angle 26.4° 6W

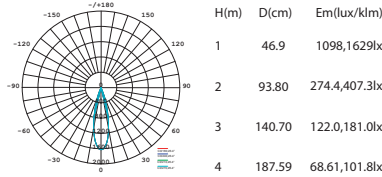


Beam Angle 27.9° 12W

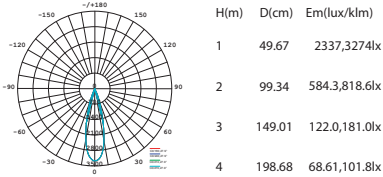

Beam Angle 16.6° 20W

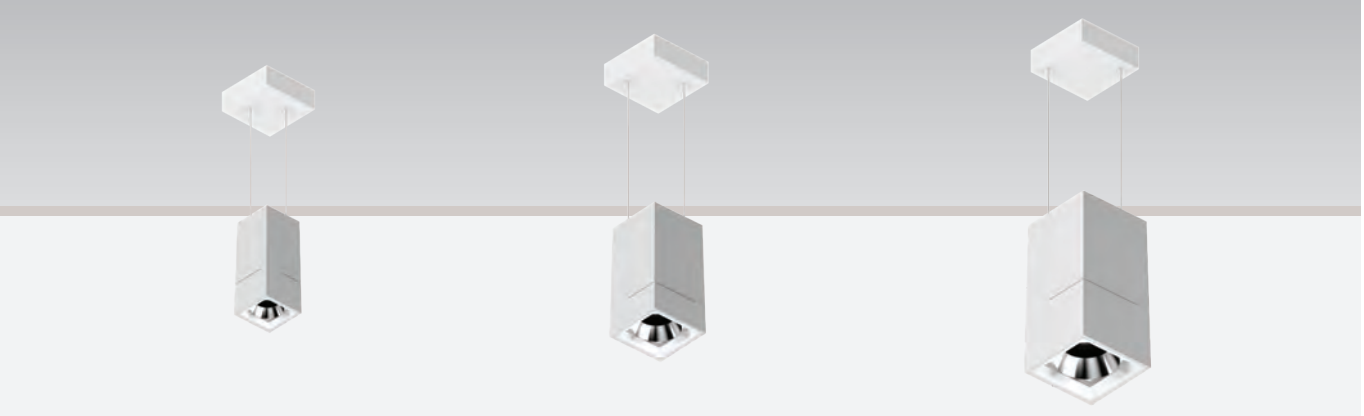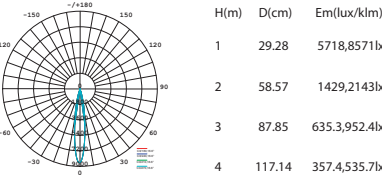

- Colour:
-
- Sand gold Chrome Black White Silver
- Optional:
-
- Honey comb

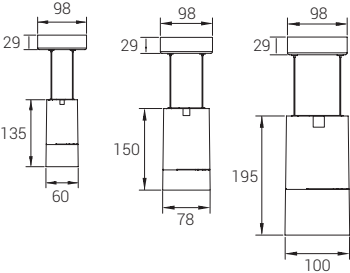

CM-DSS0206W-K/ DSS0212W-K/ DSS0220W-K


Model Code	DSS0206W-K	DSS0212W-K	DSS0220W-K
Power	6W	12W	20W
Light Source	CREE	CREE	CREE
Size(LxWxH)	60x135x1000mm	78x150x1000mm	100x195x1000mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15° /24° /38°	15° /24° /38°	15° /24° /38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 26.4° 6W

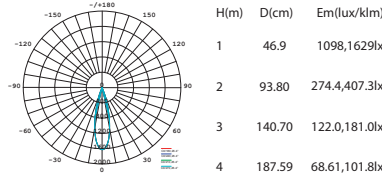

Beam Angle 27.9° 12W

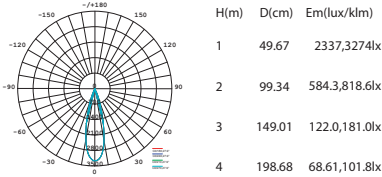


Beam Angle 16.6° 20W

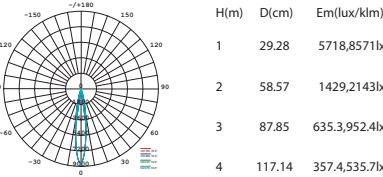



Colour:

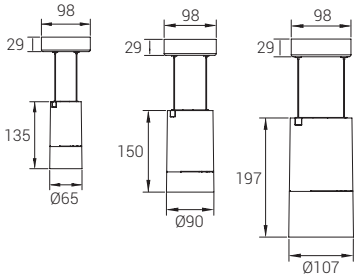

CM-PRS0206W-K/ PRS0212W-K/ PRS0220W-K


Model Code	PRS0206W-K	PRS0212W-K	PRS0220W-K
Power	6W	12W	20W
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ65x135x1000mm	Φ90x150x1000mm	Φ107x197x1000mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°	15°	15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric



Beam Angle 36.4° 6W

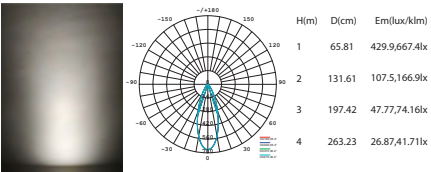


Beam Angle 34.4° 12W

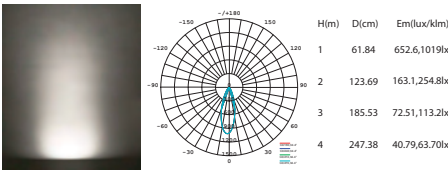

Beam Angle 36.5° 20W

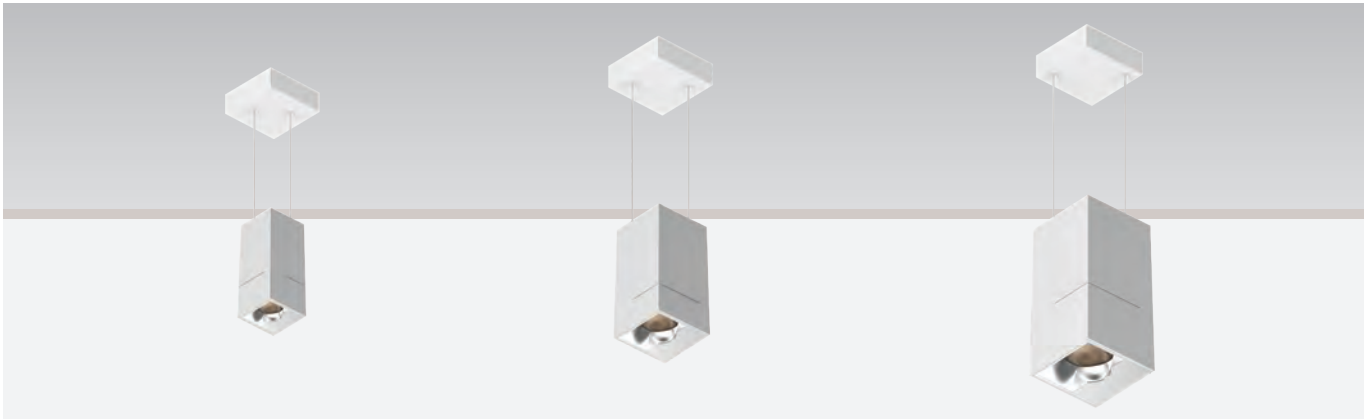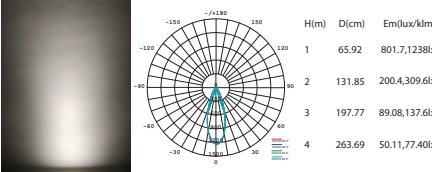

Colour:

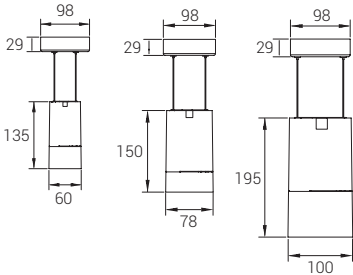

CM-PSS0206W-K/ PSS0212W-K/ PSS0220W-K


Model Code	PSS0206W-K	PSS0212W-K	PSS0220W-K
Power	6W	12W	20W
Light Source	CREE	CREE	CREE
Size(LxWxH)	60x135x1000mm	78x150x1000mm	100x195x1000mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	倾角 15°	倾角 15°	倾角 15°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 36.4° 6W

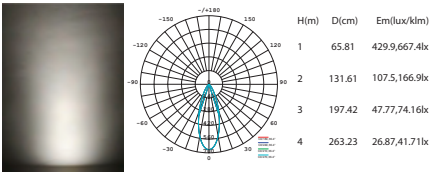

Beam Angle 34.4° 12W

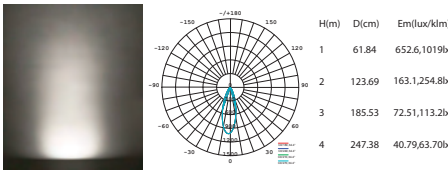


Beam Angle 36.5° 20W

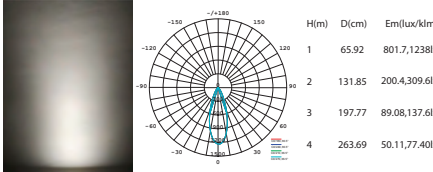



Colour:  Sand gold  Chrome  Black  White  Silver

Optional:  Honey comb

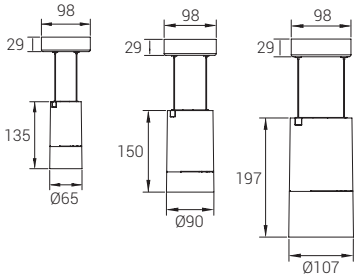


CM-FRS0206W-K/ FRS0212W-K/ FRS0220W-K

型号	Model Code	FRS0206W-K	FRS0212W-K	FRS0220W-K
功率	Power	6W	12W	20W
	Light Source	CREE	CREE	CREE
尺寸	Size(LxWxH)	Φ65x135x1000mm	Φ90x150x1000mm	Φ107x197x1000mm


UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15° /24° /38°	15° /24° /38°	15° /24° /38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

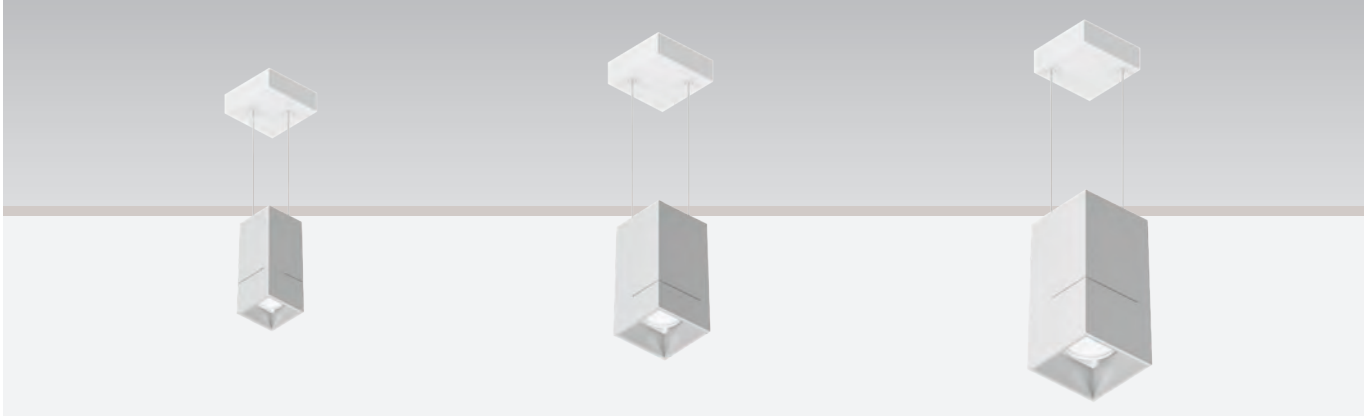

Colour:  Sand gold  Chrome  Black  White  Silver

Optional:  Honey comb

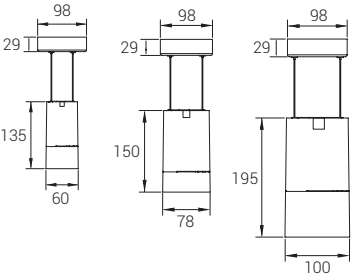

CM-FSS0206W-K/ FSS0212W-K/ FSS0220W-K

Model Code	FSS0206W-K	FSS0212W-K	FSS0220W-K
Power	6W	12W	20W
Light Source	CREE	CREE	CREE
Size(LxWxH)	60x135x1000mm	78x150x1000mm	100x195x1000mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15° /24° /38°	15° /24° /38°	15° /24° /38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20



CREE

- Die-cast aluminium lamp body can effectively prevent corrosion and rust, make the lamp body fully heat dissipation, improve heat dissipation efficiency.
- It can be used as IP43 anti-fog and prevent fog and spray from contacting light source. It is suitable for kitchen and toilet.
- Two optical structures: fixed direct/adjustable oblique.
- Equipped with an extremely narrow beam Angle, can be from different angles to accurately illuminate the subject.



Anti-glare spotlight

The unique ultra-thin shell design of this series makes it flexible to use in the limited space of the ceiling, thus reducing the construction difficulty. In addition, luminous surface no dark area, no point of light, uniform degree of highly consistent light effect, is Simple large space to provide basic lighting preferred products.


- 1

The maximum lamp body of 16° can adjust the Angle, which greatly facilitates the lighting needs of on-site debugging.
- 2

Can be combined with honeycomb grid, effectively prevent excess astigmatism.
- 3


Reflectors of different colors can be selected according to the ceiling and the overall color of the space.

LEO

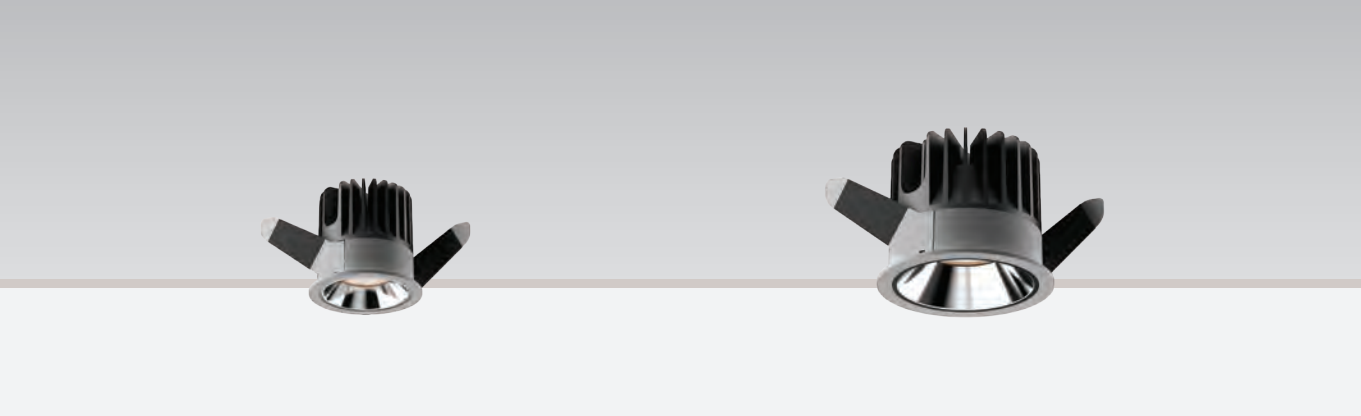

Colour :  Sand gold  Black  Silver  Chrome

Optional :  Honey comb

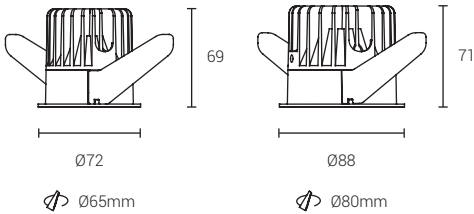

CM-1004


Model Code	1004	1004
Power	10W	15W
Cut out	Φ65mm	Φ80mm
Light Source	CREE	CREE
Size(DxH)	Φ72x69mm	Φ88x71mm

UGR	<19	<19
CRI	≥80/≥90	≥80/≥90
Beam angle	15°/24°/36°	15°/24°/36°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	850 lm	1275 lm
Life time	50000 h	50000 h
IP	IP20 / IP43	IP20 / IP43

Photometric


Beam Angle 15° 10W 3000K

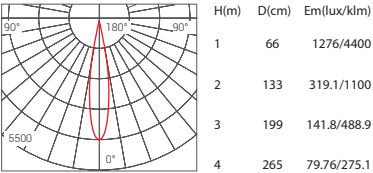


Beam Angle 24° 10W 3000K

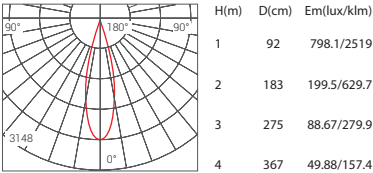

Beam Angle 38° 10W 3000K

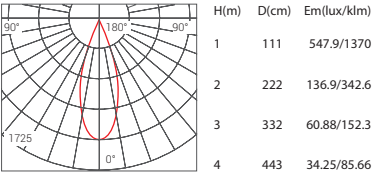


SPOTLIGHT

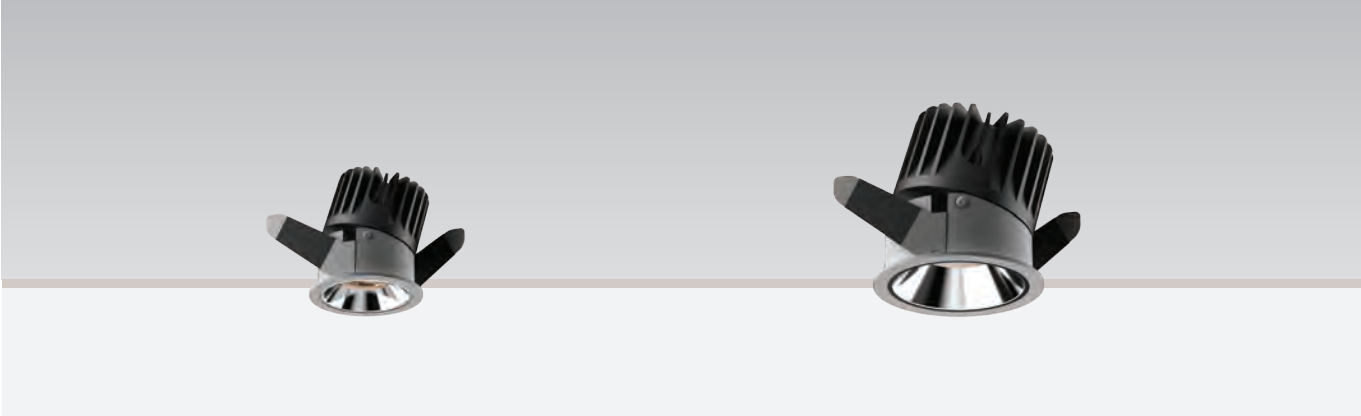

Colour :  Sand gold  Black  Silver  Chrome

Optional :  Honey comb

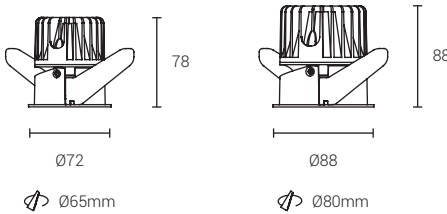

CM-1004A


Model Code	1004A	1004A
Power	10W	15W
Cut out	Φ65mm	Φ80mm
Light Source	CREE	CREE
Size(DxH)	Φ72x78mm	Φ88x88mm

UGR	<19	<19
CRI	≥80/≥90	≥80/≥90
Beam angle	15°/24°/36°	15°/24°/36°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	850 lm	1275 lm
Life time	50000 h	50000 h
IP	IP20 / IP43	IP20 / IP43

Photometric


Beam Angle 15° 15W 3000K

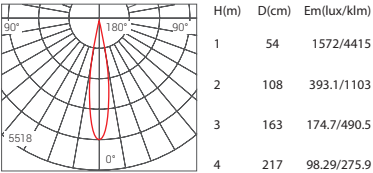


Beam Angle 24° 15W 3000K

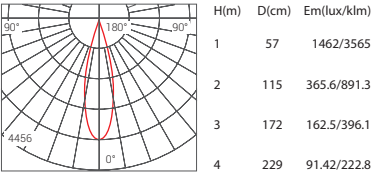

Beam Angle 38° 15W 3000K

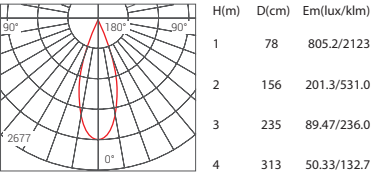

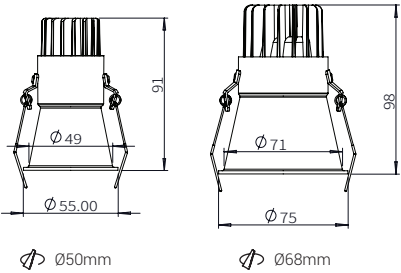

CM-1007


Model Code	1007-50	1007-68
Power	5W	10W
Cut out	Φ50mm	Φ68mm
Light Source	CREE	CREE
Size(DxH)	Φ55x120mm	Φ75X106mm

UGR	<19	<19
CRI	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	850 lm	1275 lm
Life time	50000 h	50000 h
IP	IP20	IP20

Photometric




Beam Angle 15° 10W 3000K

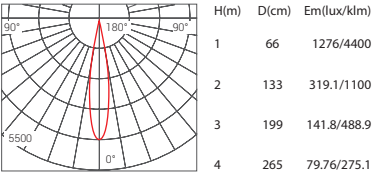

Beam Angle 24° 10W 3000K

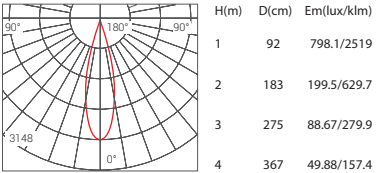

Beam Angle 38° 10W 3000K

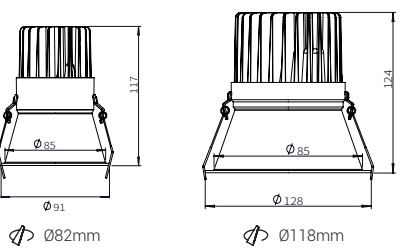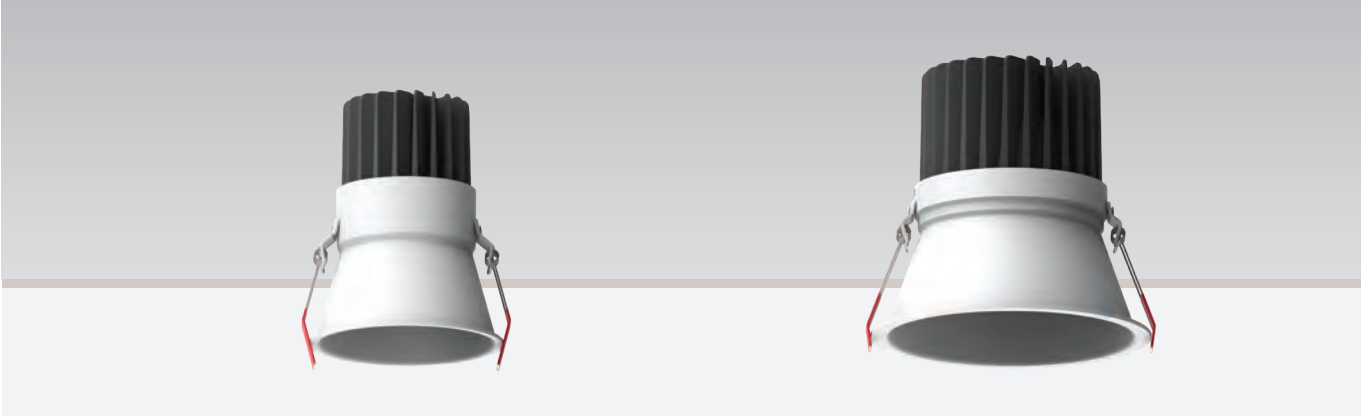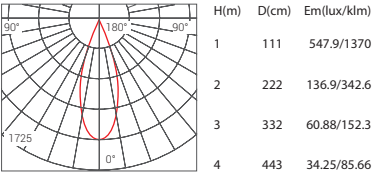

CM-1007


Model Code	1007-82	1007-118
Power	15W	15W
Cut out	Φ82mm	Φ118mm
Light Source	CREE	CREE
Size(DxH)	Φ91x120mm	Φ128x130mm

UGR	<19	<19
CRI	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	850 lm	1275 lm
Life time	50000 h	50000 h
IP	IP20	IP20

Photometric


Beam Angle 15° 15W 3000K

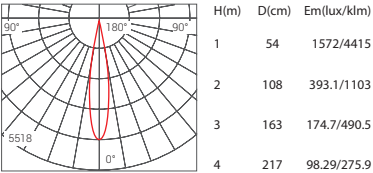


Beam Angle 24° 15W 3000K

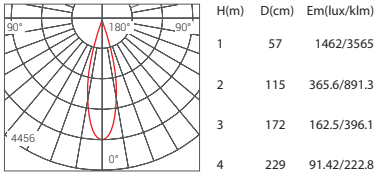


Beam Angle 38° 15W 3000K

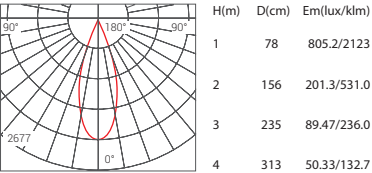

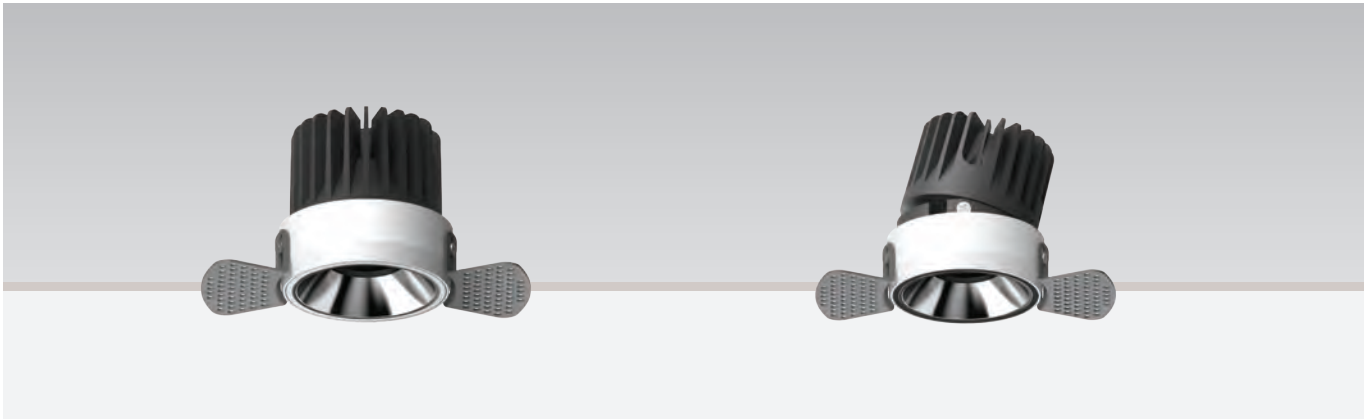

Colour :  Sand gold  Black  Silver  Chrome
Optional :  Honey comb

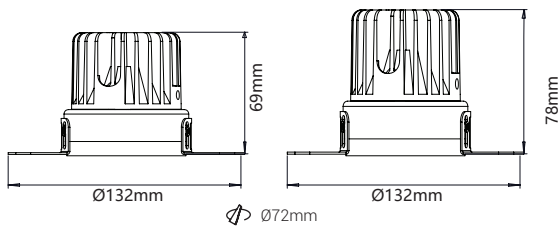

CM-1004-72


Model Code	1004-72	1004A-72
Power	10W	10W
Cut out	Φ72mm	Φ72mm
Light Source	CREE	CREE
Size(DxH)	Φ132x69mm	Φ132x78mm

UGR	<19	<19
CRI	≥80/≥90	≥80/≥90
Beam angle	15°/24°/36°	15°/24°/36°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	850 lm	1275 lm
Life time	50000 h	50000 h
IP	IP20	IP20

Photometric



Beam Angle 15° 10W 3000K

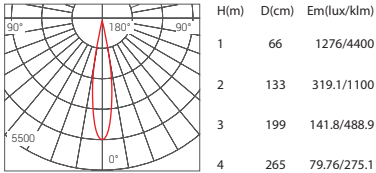


Beam Angle 24° 10W 3000K

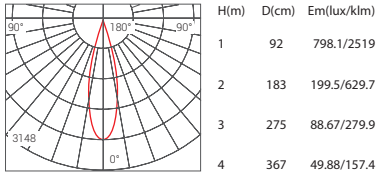

Beam Angle 38° 10W 3000K

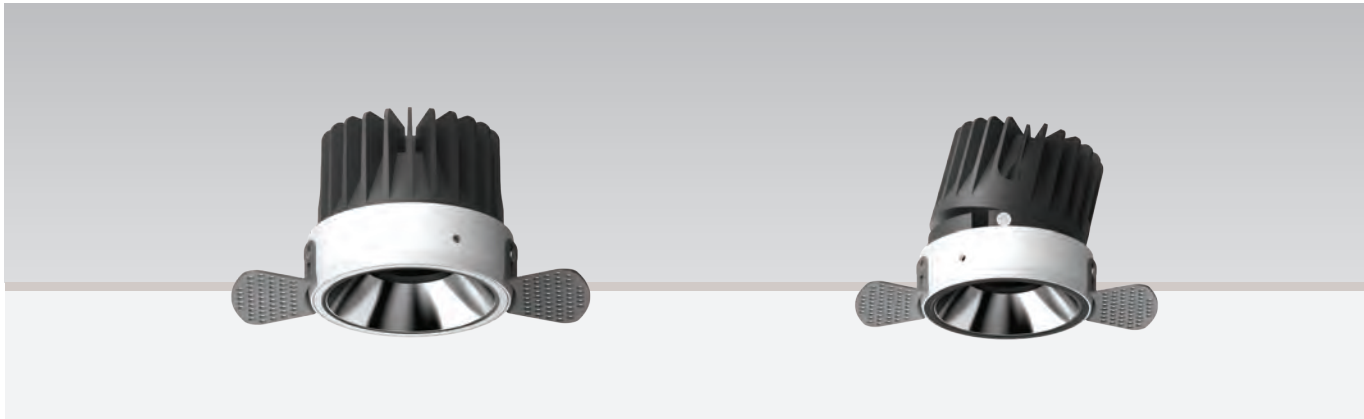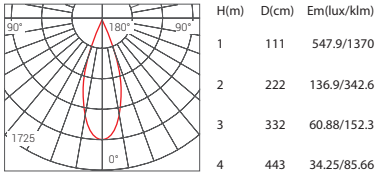

Colour :  Sand gold  Black  Silver  Chrome
Optional :  Honey comb

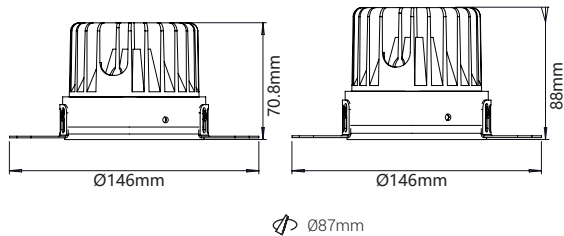

CM-1004-87


Model Code	1004-87	1004A-87
Power	15W	15W
Cut out	Φ87mm	Φ87mm
Light Source	CREE	CREE
Size(DxH)	Φ146x71mm	Φ146x88mm

UGR	<19	<19
CRI	≥80/≥90	≥80/≥90
Beam angle	15°/24°/36°	15°/24°/36°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	850 lm	1275 lm
Life time	50000 h	50000 h
IP	IP20	IP20

配光参数 Photometric


Beam Angle 15° 15W 3000K

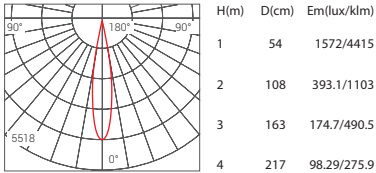

Beam Angle 24° 15W 3000K

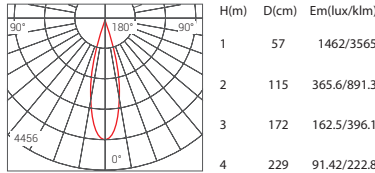

Beam Angle 38° 15W 3000K

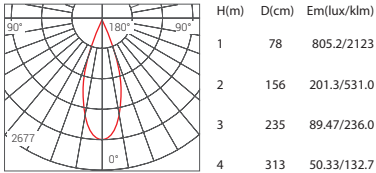



CREE LUMINUS

- Reflector cover 6 colors are optional to meet the needs of different occasions.
- Provide two optical structures: fixed direct/polarized wall wash.
- Suitable for high-end hotels, villas clubs, high-end residential, for your business life to provide a more comfortable and healthy lighting space.



Recessed spotlight


The lamp body can be adjusted to $\pm 20^\circ$, so that the function of the lamp is diversified and wall washing lighting and key lighting can be realized. Create different lighting effects for modern buildings.

1 The reflector is optional in six colors.

2 Choose four beam angles: 15°/24°/38°/60°

3 Sufficient heat-sink made of die-cast aluminum.

LIRO

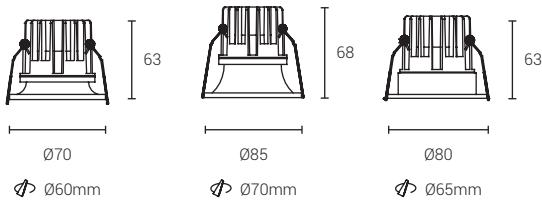

CM-XS4055 / XS4057 / XS4058


Model Code	XS4055	XS4057	XS4058
Power	10W	10W	10W
Cut out	Φ60mm	Φ70mm	Φ65mm
Light Source	CREE	CREE	CREE
Size(DxH)	Φ70x63mm	Φ85x68mm	Φ80x63mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°/60°	15°/24°/38°/60°	15°/24°/38°/60°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	830 lm	830 lm	830 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 15° 10W 3000K

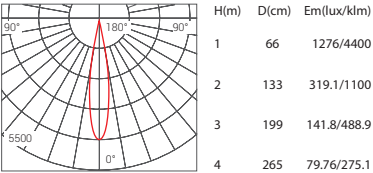


Beam Angle 24° 10W 3000K

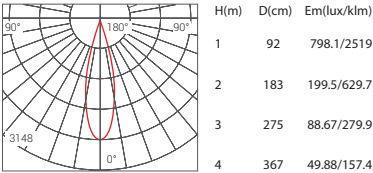

Beam Angle 38° 10W 3000K

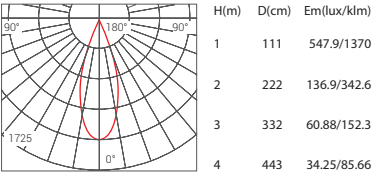

FIXED SPOTLIGHT

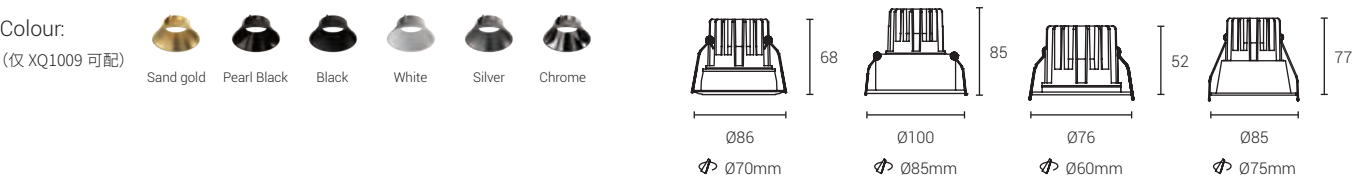

CM-XS4060 / XS4061 / XS4062 / XQ1009


Model Code	XS4060	XS4061	XS4062	XQ1009
Power	10W	10W	10W	12W
Cut out	Φ70mm	Φ85mm	Φ60mm	Φ75mm
Light Source	CREE	CREE	CREE	CREE / CITEZEN / LUMINUS
Size(DxH)	Φ86x68mm	Φ100x85mm	Φ76x52mm	Φ85x77mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°/60°	15°/24°/38°/60°	15°/24°/38°/60°	15°/24°/36°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	830 lm	830 lm	830 lm	996 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 10W 3000K


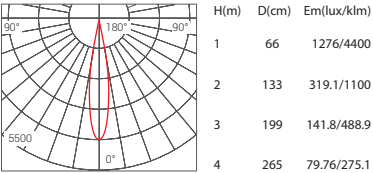


Beam Angle 24° 10W 3000K

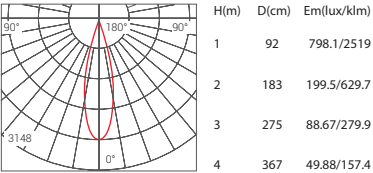

Beam Angle 38° 10W 3000K

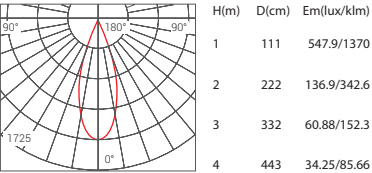

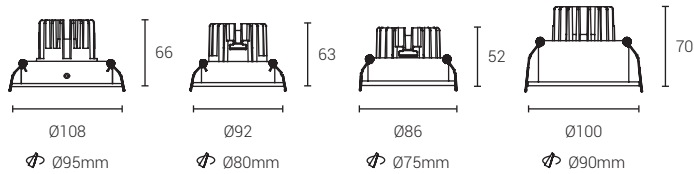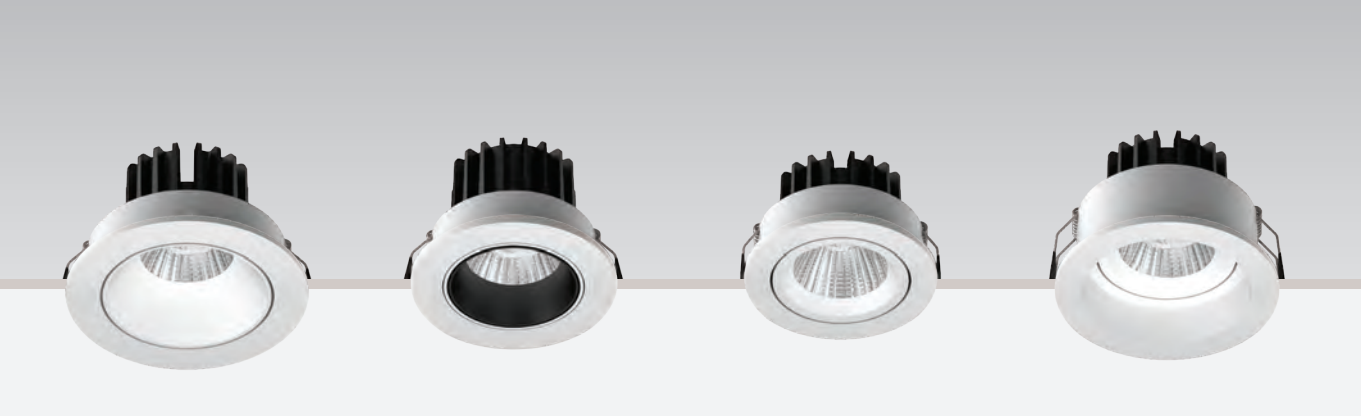


CM-XS4056 / XS4059 / XS4063 / XS4064


Model Code	XS4056	XS4059	XS4063	XS4064
Power	10W	10W	10W	12W
Cut out	Φ95mm	Φ80mm	Φ75mm	Φ90mm
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	Φ108x66mm	Φ92x63mm	Φ86x52mm	Φ100x70mm
UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°/60°	15°/24°/38°/60°	15°/24°/38°/60°	15°/24°/36°
CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	830 lm	830 lm	830 lm	830 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 10W 3000K

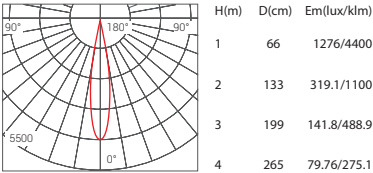

Beam Angle 24° 10W 3000K

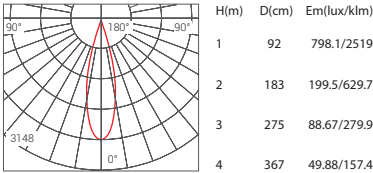

Beam Angle 38° 10W 3000K

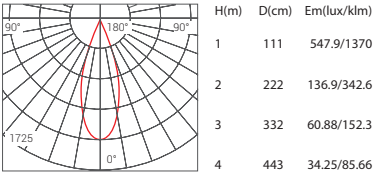




CREE LUMINUS

- Aluminum fitting keeps its LED chip working with a low temperature and working for a long time.
- High performance chip with Ra>90.
- Cutout range from Φ30-Φ60mm,suits for small cutout size of ceiling and short distance which is less than 100mm.
- Suitable for villas, hotels, residential buildings and high upscale clubs.



The maximum lamp body of 25° can adjust the Angle, which greatly facilitates the lighting needs of on-site debugging.

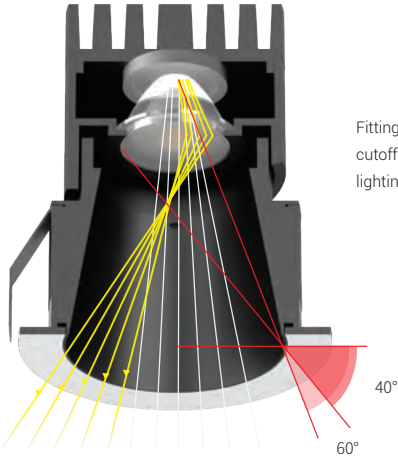


Fitting in anti glare construction increases the cutoff angle. UGRs9 achieves comfortable lighting environment.

ELF



Optional :  Soft Lens  Square  Stripe

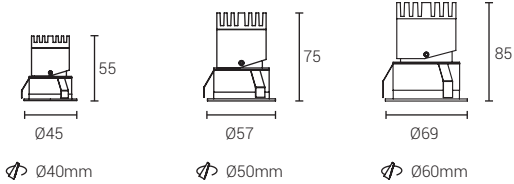

CM-XS4012 / XS4013 /XS4014


Model Code	XS4012	XS4013	XS4014
Power	3W	5W	9W
Cut out	Φ40mm	Φ50mm	Φ60mm
Light Source	CREE / CITEZEN / LUMINUS	CREE / CITEZEN / LUMINUS	CREE / CITEZEN / LUMINUS
Size(DxH)	Φ45x55mm	Φ57x75mm	Φ69x85mm

UGR	<9	<9	<9
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/40°	15°/24°/40°	15°/24°/40°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	425 lm	680 lm	850 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 15° 5W 3000K

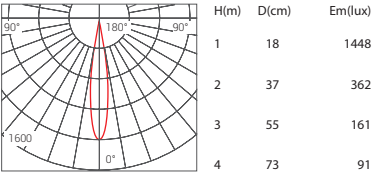


Beam Angle 15° 8W 3000K

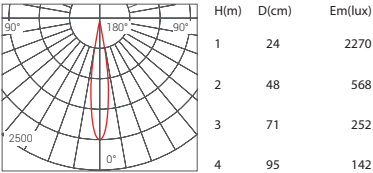


Beam Angle 15° 10W 3000K

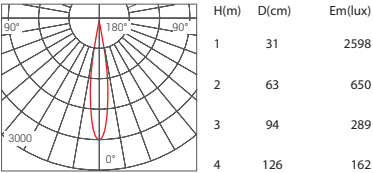

SPOTLIGHT

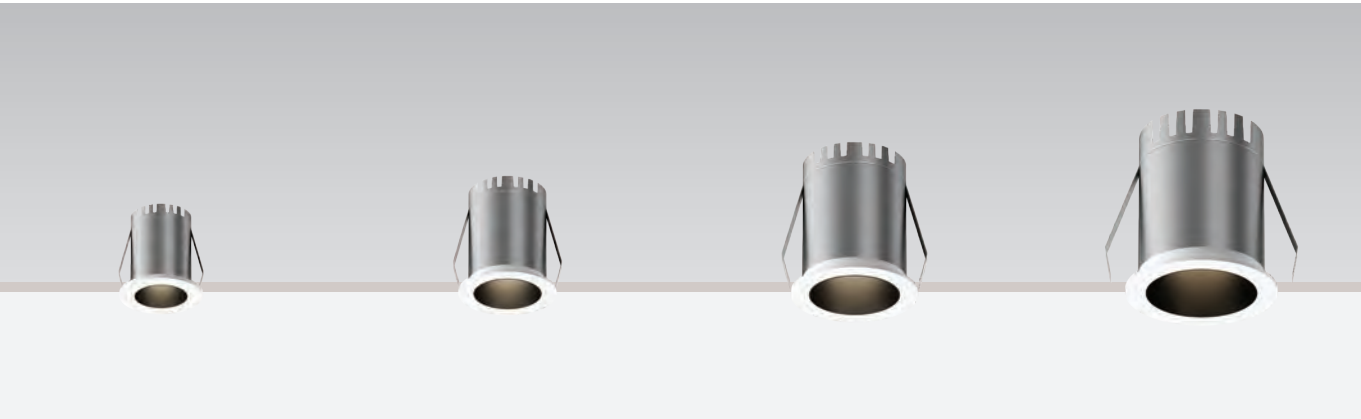

Optional :  Soft Lens  Square  Stripe

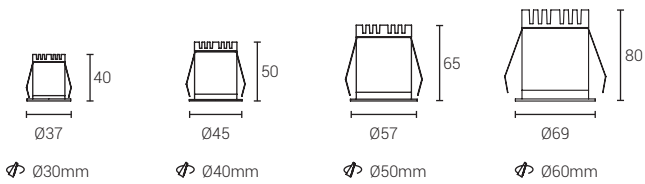

CM-XS4008 / XS4009 / XS4010 / XS4011


Model Code	XS4008	XS4009	XS4010	XS4011
Power	3W	3W	5-7W	7-9W
Cut out	Φ30mm	Φ40mm	Φ50mm	Φ60mm
Light Source	CREE / CITEZEN / LUMINUS	CREE / CITEZEN / LUMINUS	CREE / CITEZEN / LUMINUS	CREE / CITEZEN / LUMINUS
Size(DxH)	Φ37x40mm	Φ45x50mm	Φ57x68mm	Φ69x80mm

UGR	<9	<9	<9	<9
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/40°	15°/24°/40°	15°/24°/40°	15°/24°/40°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	255 lm	425 lm	680 lm	850 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 3W 3000K

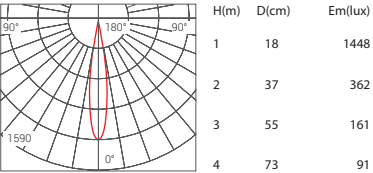

Beam Angle 15° 5W 3000K

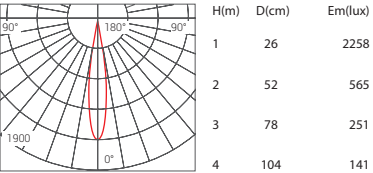

Beam Angle 15° 8W 3000K

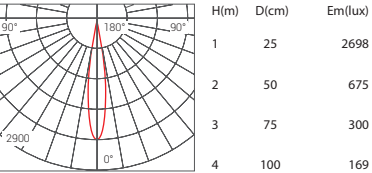



CREE LUMINUS

- Aluminum alloy fitting keeps its LED chip working with a low temperature and working for a long lifetime.
- High performance reflector with precise speckle, Three beam angles:15°/24°/38° meet different requirements.
- Suitable for high-end hotels, villas clubs, high-end residential, for your business life to provide a more comfortable and healthy lighting space.



Anti-glare spotlight

The ultra-thin radiator structure and honeycomb grid make the ultra-thin lamp body have excellent anti glare effect.


- 1

Can be combined with honeycomb grid, effectively prevent excess astigmatism.
- 2

High performance reflector with precise speckle.
- 3

Sufficient heat-sink made of die-cast aluminum.

LITTLE MAN

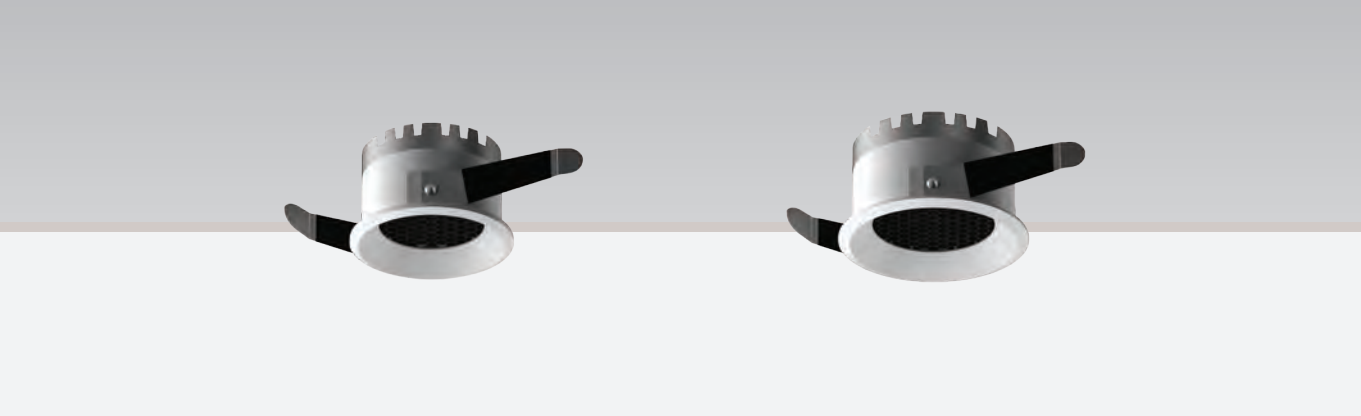


Optional :

Soft Lens

Square

Stripe





CM-PE-G55 / PE-G65

Model Code	PE-G55	PE-G65
Power	5W	7W
Cut out	Φ55mm	Φ65mm
Light Source	CREE / CITEZEN / LUMINUS	CREE / CITEZEN / LUMINUS
Size(DxH)	Φ60x38mm	Φ70x36mm


UGR	<16	<16
CRI	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	425 lm	595 lm
Life time	50000 h	50000 h
IP	IP20	IP20

Photometric

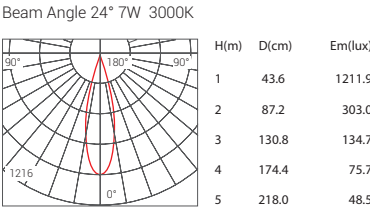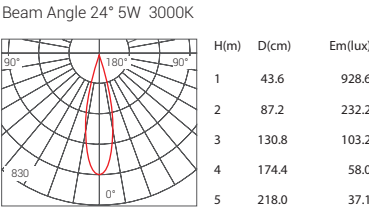

SPOTLIGHT

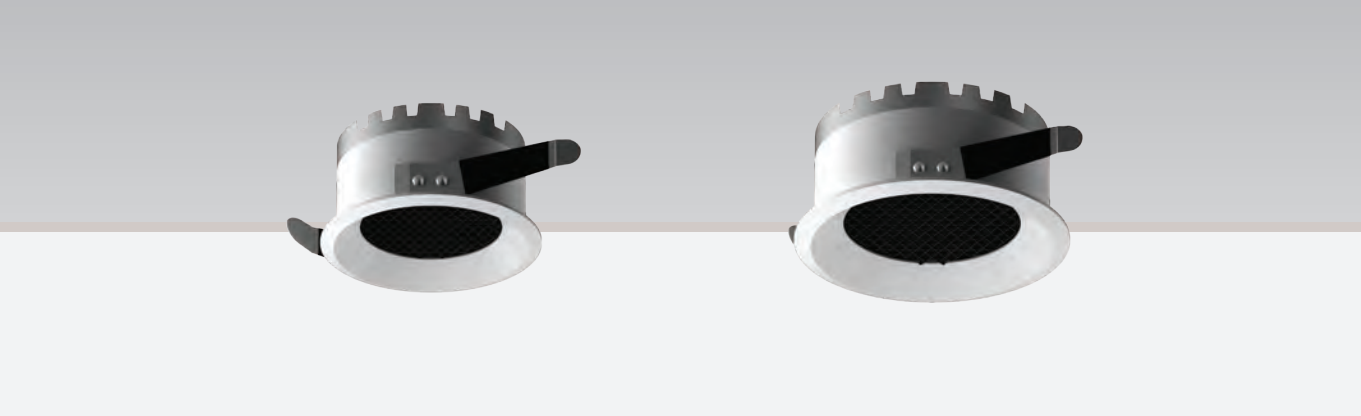


Optional :

Soft Lens

Square

Stripe





CM-PE-G75 / PE-G95

Model Code	PE-G75	PE-G95
Power	9W	15W
Cut out	Φ75mm	Φ95mm
Light Source	CREE / CITEZEN / LUMINUS	CREE / CITEZEN / LUMINUS
Size(DxH)	Φ82x40mm	Φ102x46mm

UGR	<16	<16
CRI	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	765 lm	1275 lm
Life time	50000 h	50000 h
IP	IP20	IP20

Photometric

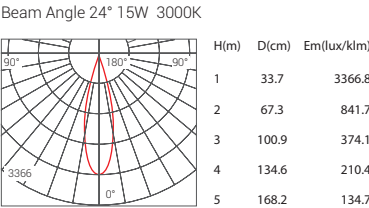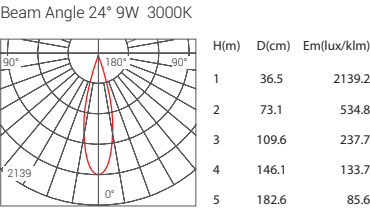



- Aluminum alloy fitting keeps its LED chip working with a low temperature and working for a long lifetime.
- High performance reflector with precise speckle, Three beam angles:15°/24°/38° meet different requirements.
- The lamp body can be adjusted to ±25°, so that the function of the lamp is diversified and wall washing lighting and key lighting can be realized.

Adjustable spotlight


The lamp body can be adjusted to ±25°, so that the function of the lamp is diversified and wall washing lighting and key lighting can be realized. Create different lighting effects for modern buildings.

- 1


Ultra thin lamp body, suitable for low floor and high space.
- 2

Anti glare front ring, effectively reduce glare.
- 3


Sufficient heat-sink made of die-cast aluminum.

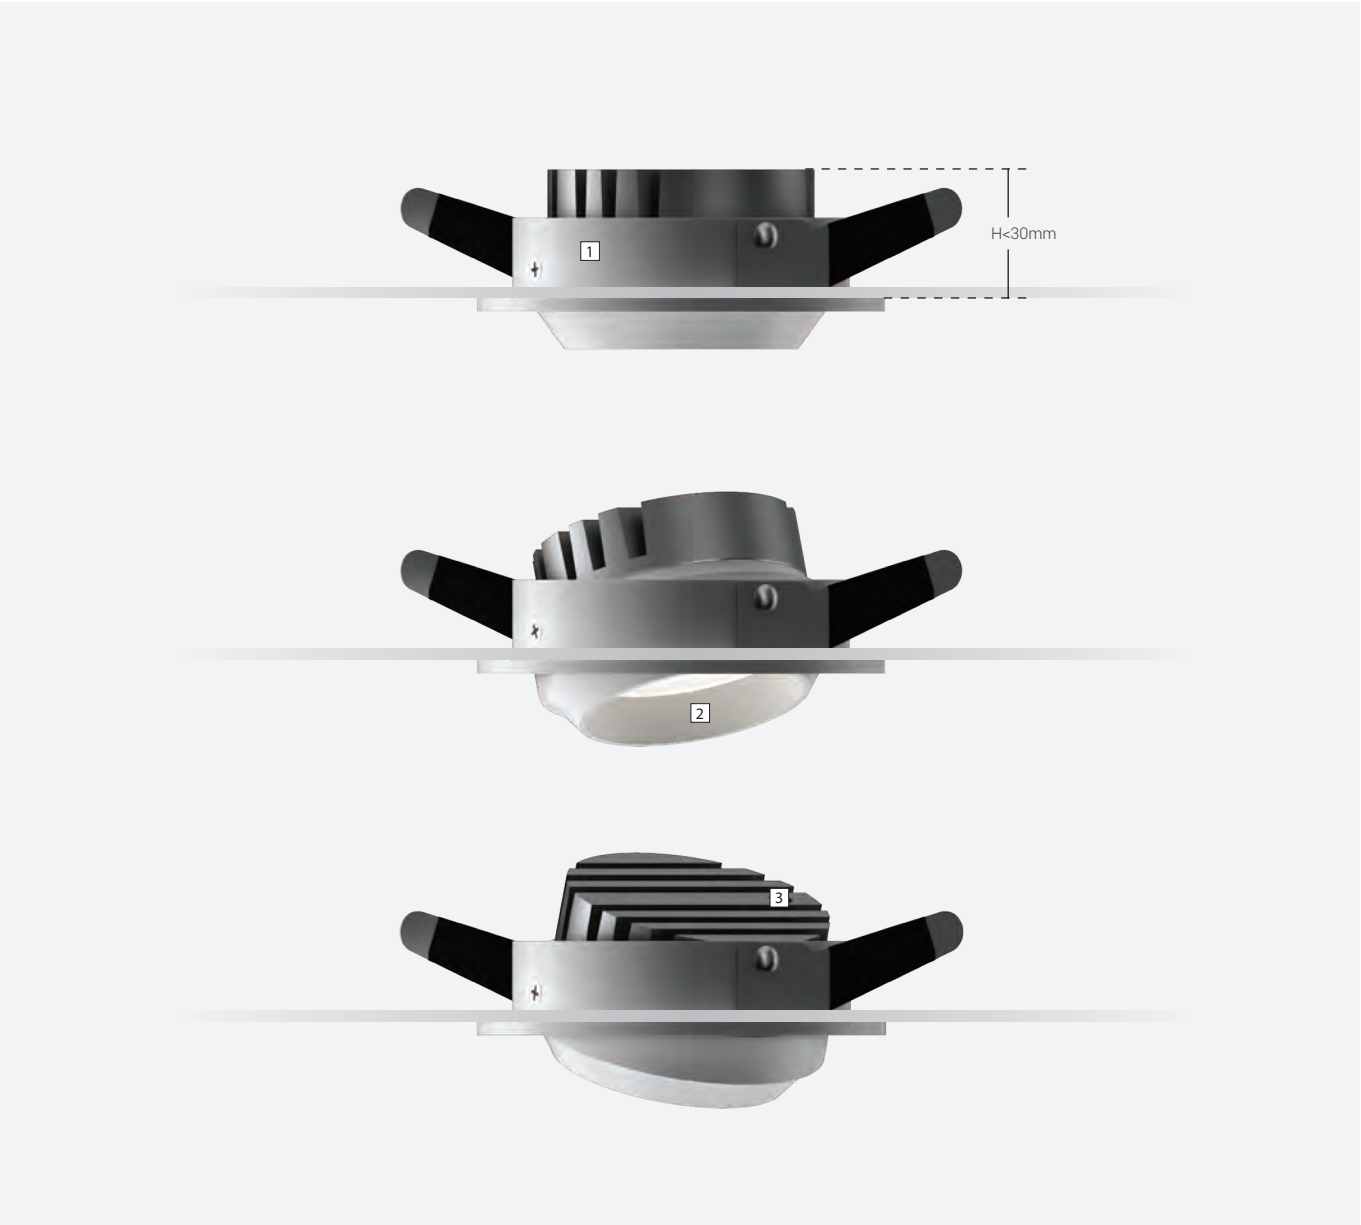

ULTRATHIN

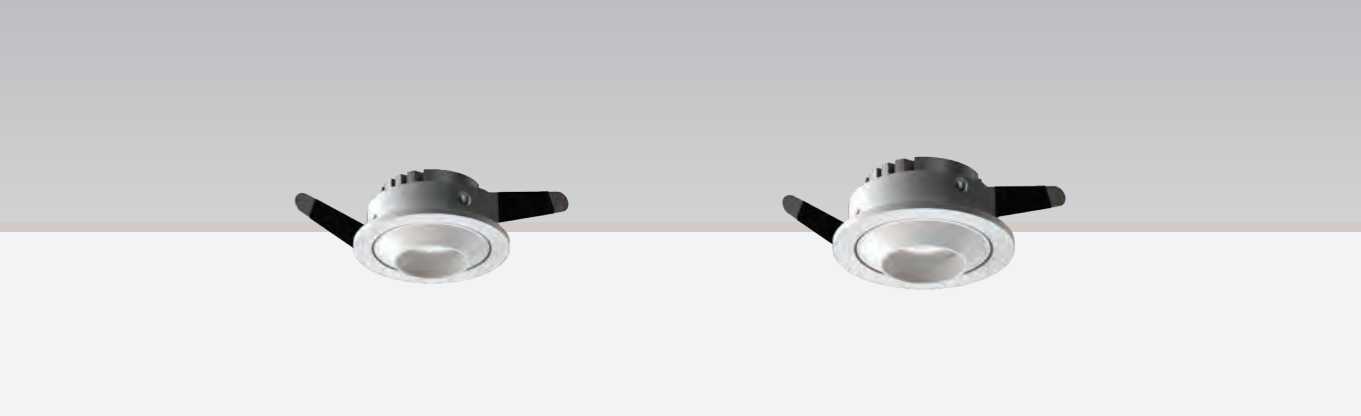

- Optional :
- Soft Lens
- Square
- Stripe





CM-PE-K55 / PE-K65

Model Code	PE-K55	PE-K65
Power	5W	7W
Cut out	Φ55mm	Φ65mm
Light Source	CREE / CITEZEN / LUMINUS	CREE / CITEZEN / LUMINUS
Size(DxH)	Φ65x35mm	Φ72x36mm

UGR	<16	<16
CRI	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	425 lm	595 lm
Life time	50000 h	50000 h
IP	IP20 / IP65	IP20 / IP65


Photometric

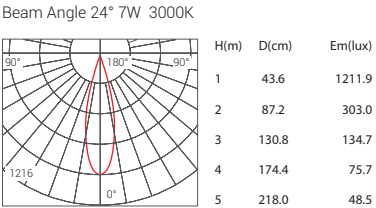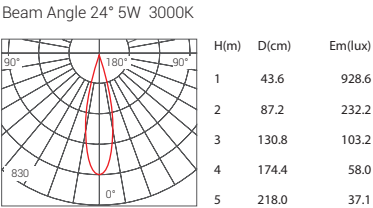

SPOTLIGHT



- Optional :
- Soft Lens
- Square
- Stripe

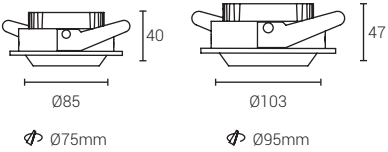



CM-PE-K75 / PE-K95

Model Code	PE-K75	PE-K95
Power	9W	15W
Cut out	Φ75mm	Φ95mm
Light Source	CREE / CITEZEN / LUMINUS	CREE / CITEZEN / LUMINUS
Size(DxH)	Φ85x40mm	Φ103x47mm

UGR	<16	<16
CRI	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	765 lm	1275 lm
Life time	50000 h	50000 h
IP	IP20	IP20


Photometric

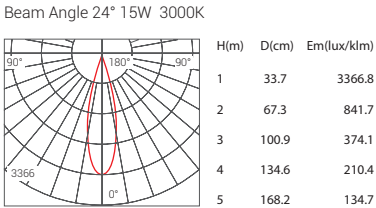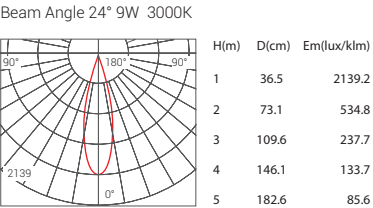



CREE LUMINUS

- Aluminum alloy fitting keeps its LED chip working with a low temperature and working for a long lifetime.
- A variety of power options, from 10W to 50W, cover a variety of floor space, more applicability.
- Suitable for high-end hotels, villas clubs, high-end residential, for your business life to provide a more comfortable and healthy lighting space.

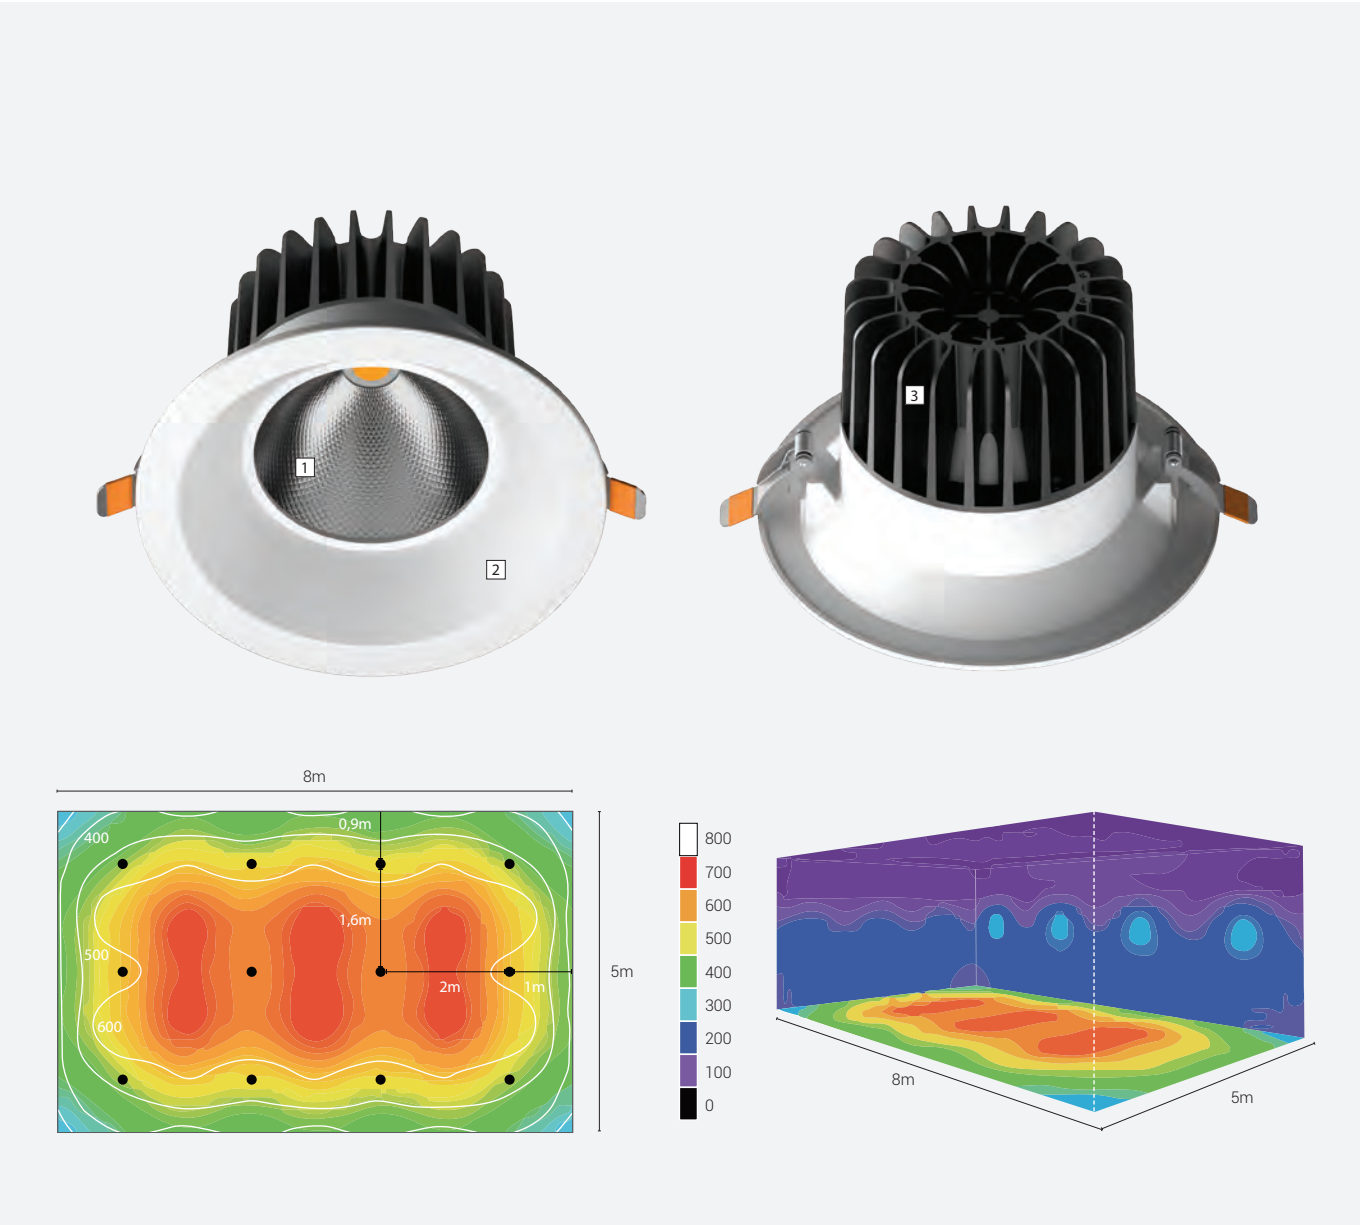

COB downlight

The light is not perceived by those who live the space to guarantee a high visual comfort. The optical bench, set back from the recessed surface, hides from the view the light source. Inside the Cut off angle (45 °) The appliance appears as off.

- 1 High purity aluminum reflective cup improves reflection efficiency.
- 2 Anti glare front ring, effectively reduce glare.
- 3 Sufficient heat-sink made of die-cast aluminum.


CROWN

DOWNLIGHT



Optional :   

Soft Lens Square Stripe

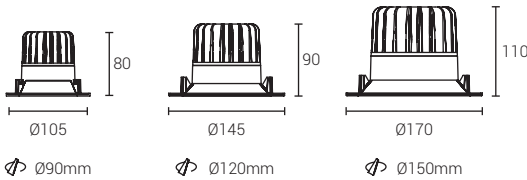

CM-COB1402-90 / COB1402-120 / COB1402-150


Model Code	COB1402-90	COB1402-120	COB1402-150
Power	10W	18W	25W
Cut out	Φ90mm	Φ120mm	Φ150mm
Light Source	CREE	CREE	CREE
Size(DxH)	Φ105x80mm	Φ145x90mm	Φ170x110mm

UGR	<16	<16	<16
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°/60°	15°/24°/38°/60°	15°/24°/38°/60°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	850 lm	1530 lm	2125 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 24° 10W 3000K

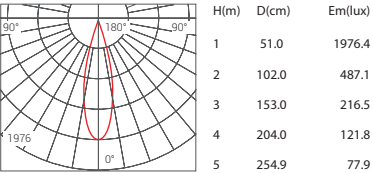

Beam Angle 24° 18W 3000K

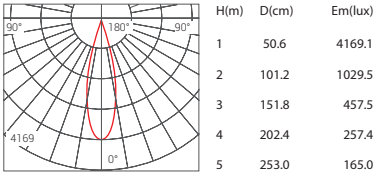


Beam Angle 24° 25W 3000K

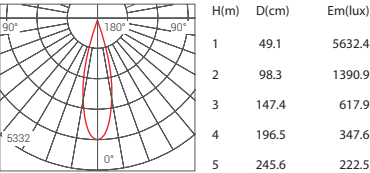

Optional :   

Soft Lens Square Stripe

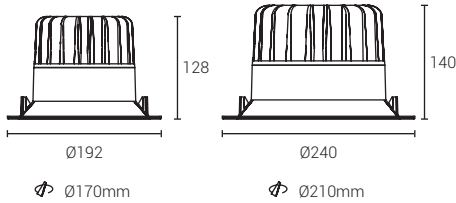

CM-COB1402-170 / COB1402-210


Model Code	COB1402-170	COB1402-210
Power	40W	50W
Cut out	Φ170mm	Φ210mm
Light Source	CREE	CREE
Size(DxH)	Φ192x128mm	Φ240x140mm

UGR	<16	<16
CRI	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°/60°	15°/24°/38°/60°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	3400 lm	4250 lm
Life time	50000 h	50000 h
IP	IP20	IP20

Photometric

Beam Angle 24° 40W 3000K

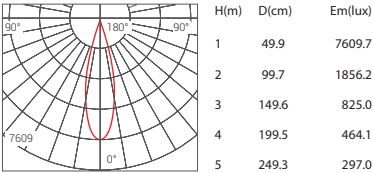


Beam Angle 24° 50W 3000K

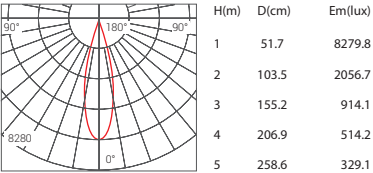



CREE **HONOURTEK**

- Series design, deep anti-glare design, effectively reduce glare.
- The module rotates 355° horizontally and 60° vertically to meet different illumination angles.
- Narrow border/no border design, perfect combination of lighting and installation ceiling, enhance the consistency of space vision.
- The light body can be freely stretched downward upward to meet the high demand of different layers

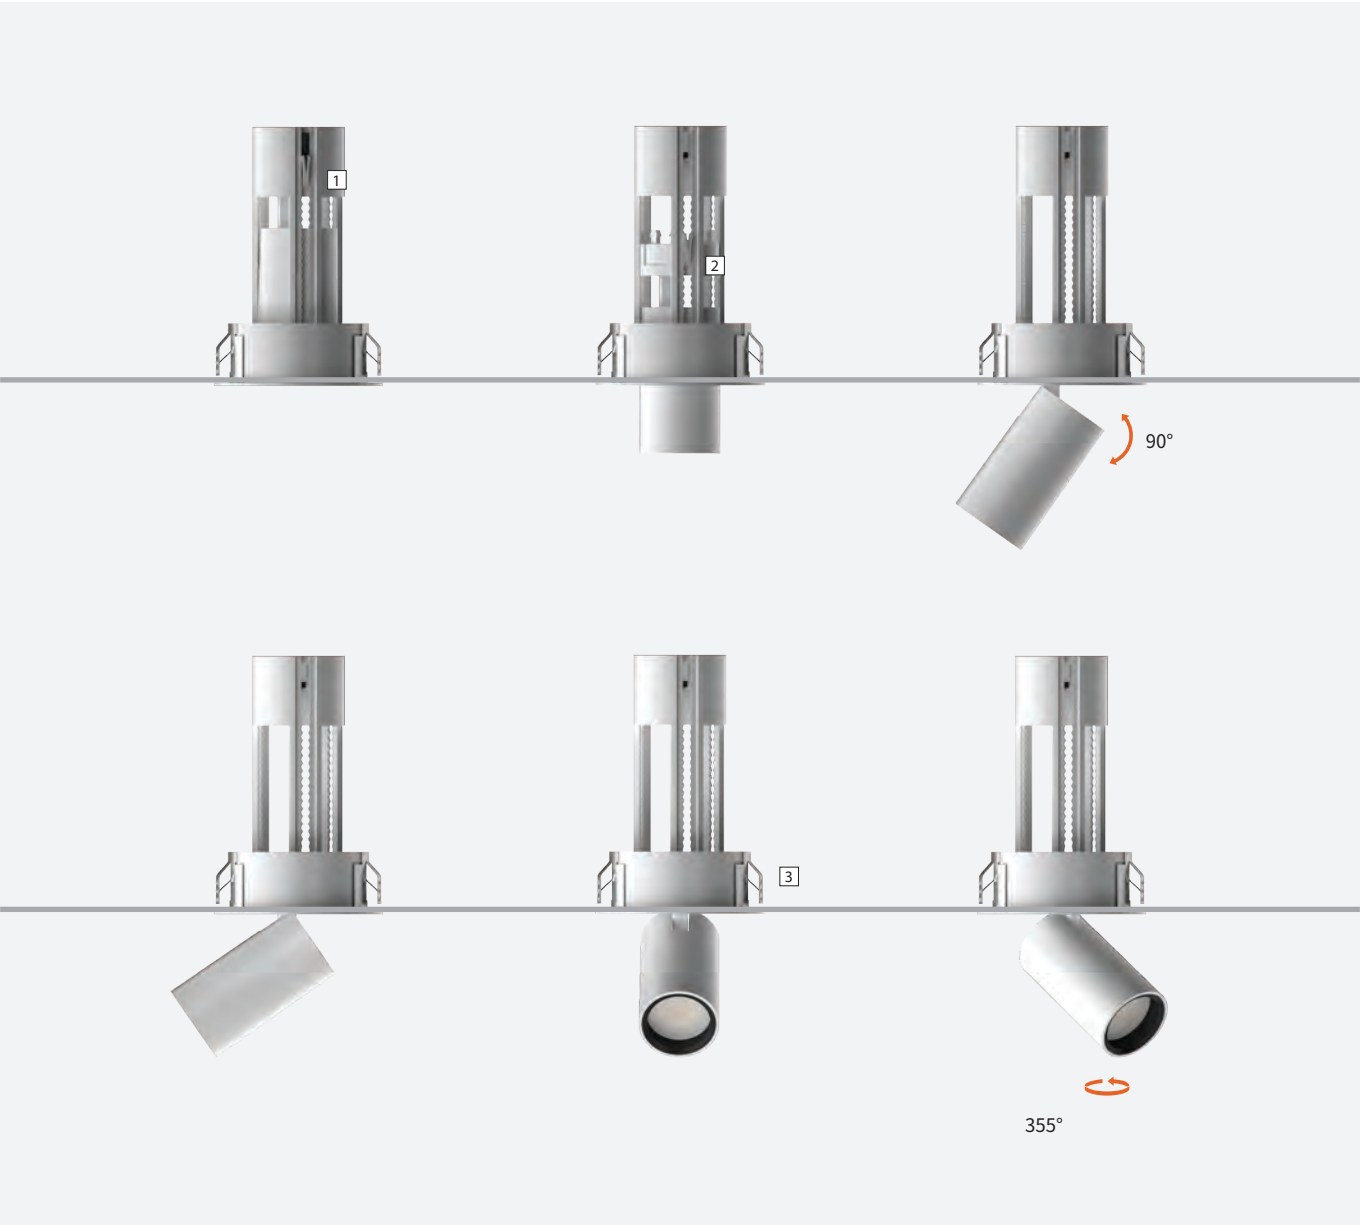


Adjustable telescopic spotlight

Optional light effect accessories can be used to create different lighting effects.
Can be combined with Linan series, light efficiency, flexible one without leakage.

- 1 Press-type fixed buckle, so that the lamp body is not easy to loosen, maintain a fixed state.
- 2 Fixed chuck with height adjustment, so that the lamp body can be fixed in the middle without slipping.
- 3 Various specifications are available, 1/2/3/4 lamp holder, reasonable installation structure can make the ceiling simple, natural and visual.

LINA

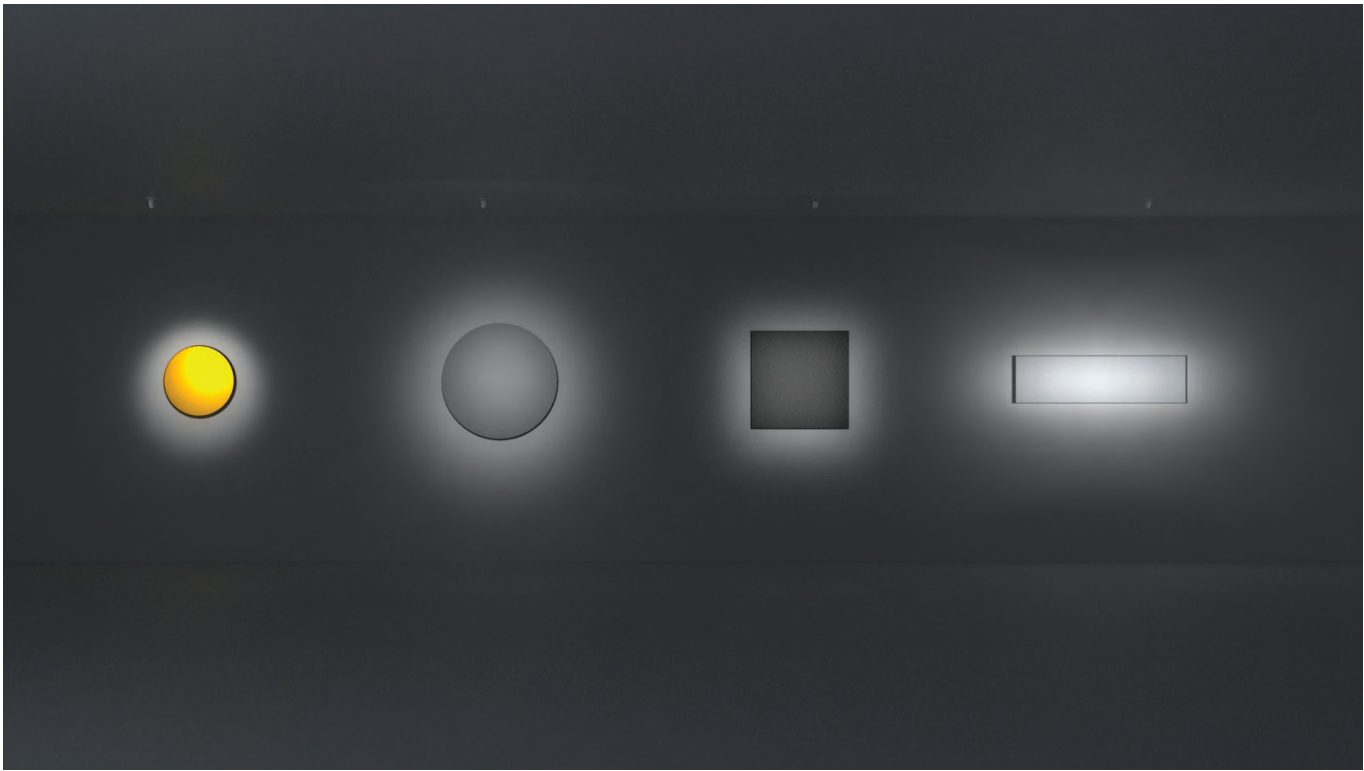

LIGHT-EFFECT ACCESSORIES



Honey comb



Soft Lens



Square



Stripe

Family Design

ADJUSTABLE SPOT



BEAUTY OF DIFFERENT COLOURS



White + White



White + Black




Black + Gold



Black + Black



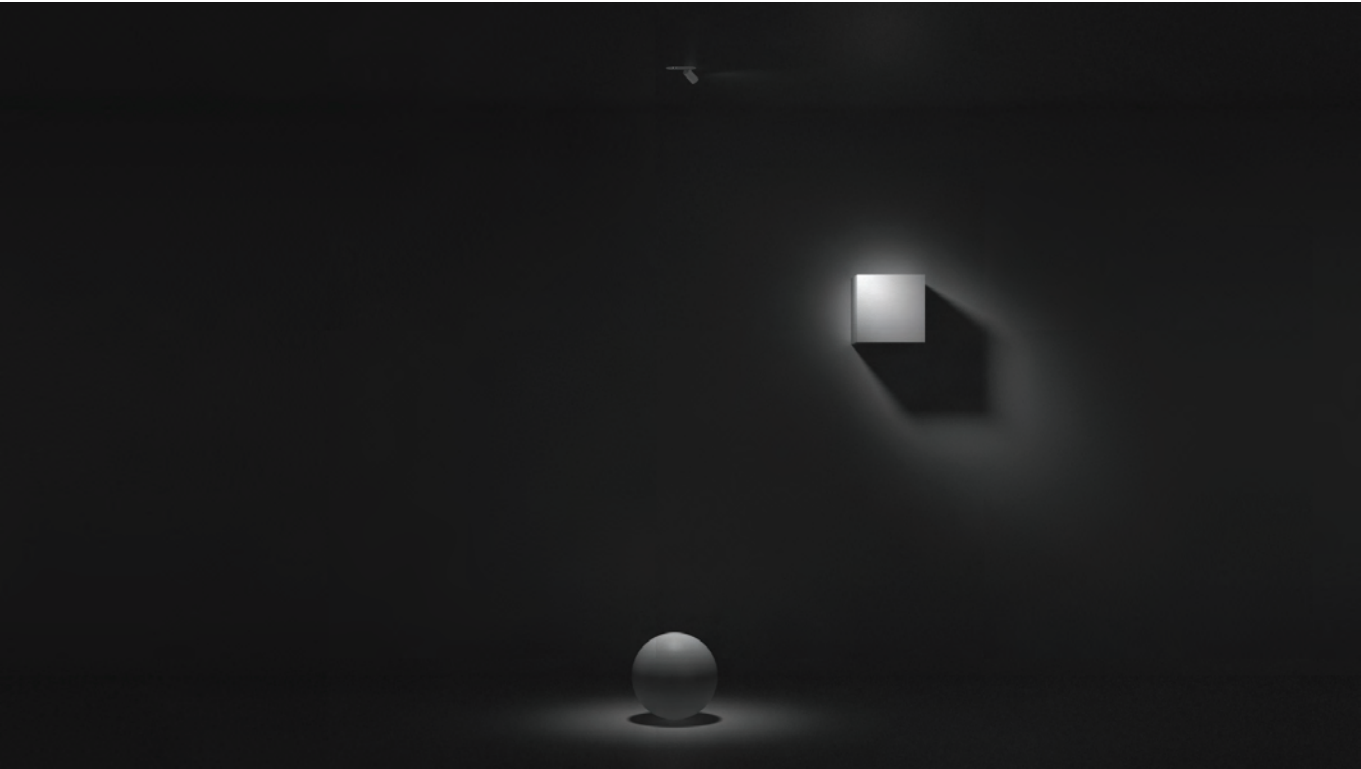

REMOVE



REPLACE



COMBINATION

Combination, more than one

Family mold design improves the versatility of the lamp module, achieving a multi-purpose lamp; Can be combined with Linan series, light efficiency, flexible one without leakage.




Split structure

1 The stretching lamp holder contains a height adjusting fixing chute. The lamp body can be fixed in the middle without slipping.



2 Rotating glass with positioning groove for fixing rotation angle to make lamp adjust more accurately.



3 Main body lamp body.

4 Light Source Chip.

4

5

5 Chip Bracket.

6 Nano Reflector Cup.

6


7

7 High Definition Lens.

8 Fixed front ring, optional three color replacement, white/black/gold.

8



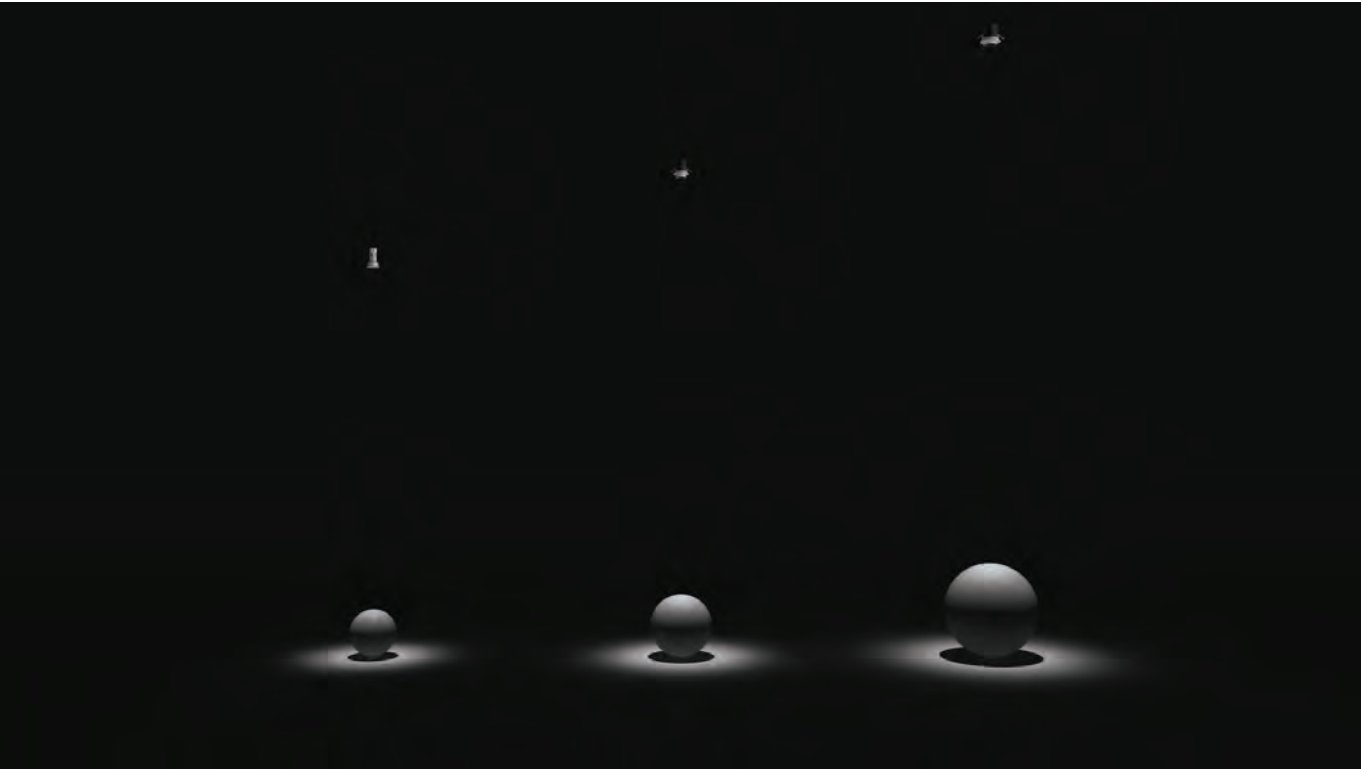

6W

≤ 3m



12W

3~4m



28W

4~6m

Brightness, more than one

Three kinds of power specifications are available to suit different layers.



SINGLE



DUAL



TRIPLE



TETRAD

Flexibility, more than one

Various installation structures are optional family design enhance visual unity;
Let the light move at will to maximize the value of light efficiency.






Villa Application Scene



Apparel Store Application Scene

LINA

6W

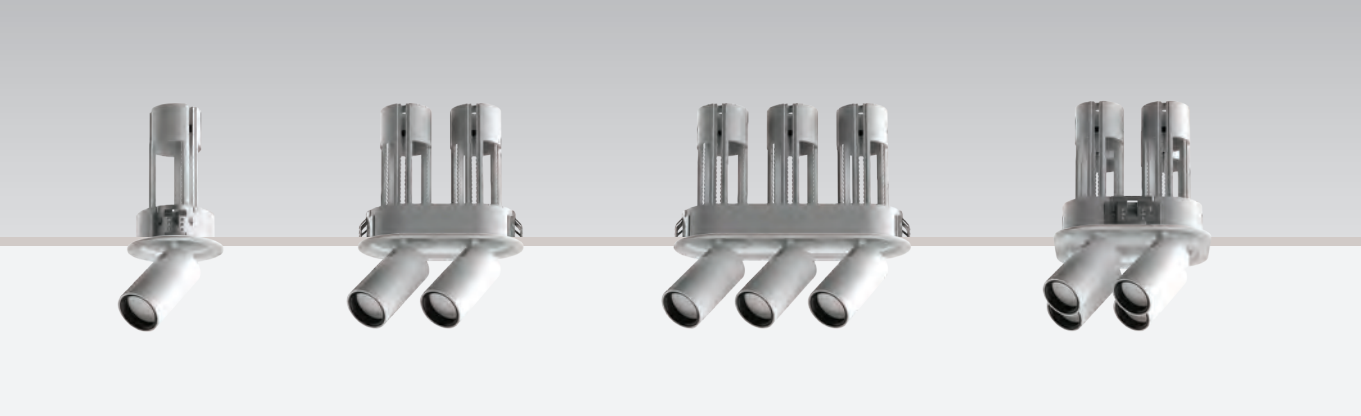

Colour:

Optional :

CM-LS3005E70/ LS3005E70-2/ LS3005E70-3/ LS3005E70-4


Model Code	LS3005E70	LS3005E70-2	LS3005E70-3	LS3005E70-4
Power	6W	2x6W	6Wx3	6Wx4
Cut out	Φ70mm	130xΦ68mm	190xΦ68mm	130x130mm-R34
Light Source	HONOURTEK	HONOURTEK	HONOURTEK	HONOURTEK
Size(DxH)	Φ80x123mm	140xΦ80x123mm	200xΦ80x123mm	140x140x123mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	570 lm	1140 lm	1710 lm	2280 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20 / IP65

Photometric


Beam Angle 15° 6W 3000K

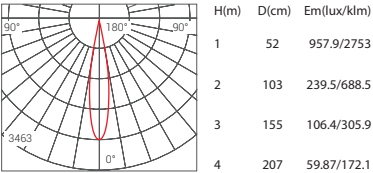


Beam Angle 24° 6W 3000K

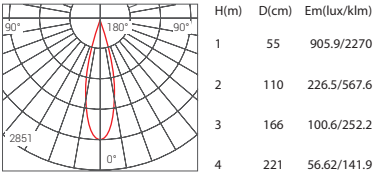

Beam Angle 38° 6W 3000K

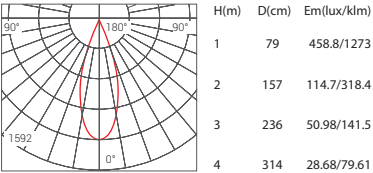

ADJUSTABLE SPOT

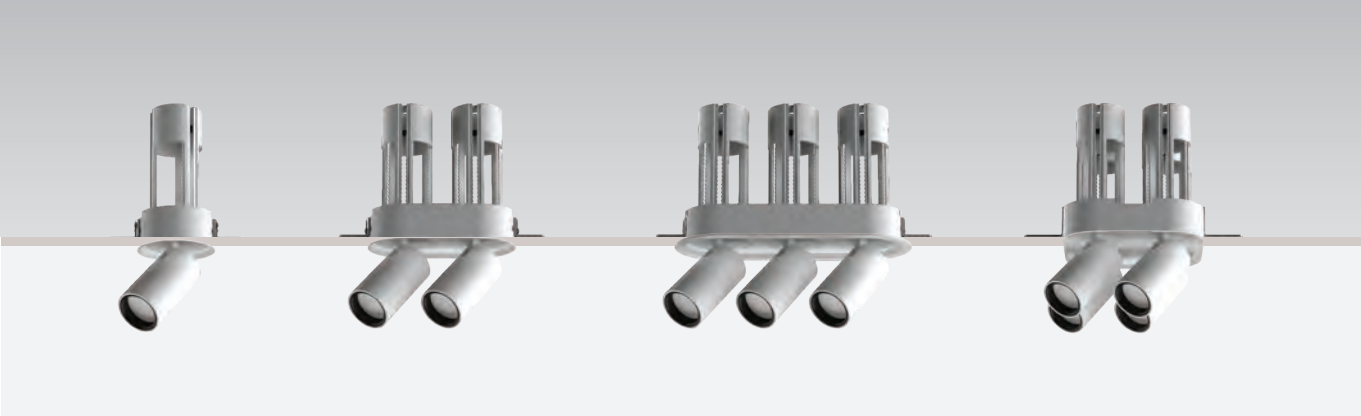

Colour:

Optional :

CM-LS3005T70/ LS3005T70-2/ LS3005T70-3/ LS3005T70-4


Model Code	LS3005T70	LS3005T70-2	LS3005T70-3	LS3005T70-4
Power	6W	2x6W	6Wx3	6Wx3
Cut out	Φ70mm	128xΦ68mm	188xΦ68mm	130x130mm-R34
Light Source	HONOURTEK	HONOURTEK	HONOURTEK	HONOURTEK
Size(DxH)	Φ126x123mm	186x66x123mm	246x66x123mm	192x126x123mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	570 lm	1140 lm	1710 lm	2280 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 6W 3000K

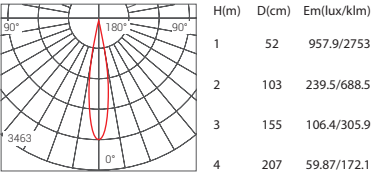

Beam Angle 24° 6W 3000K

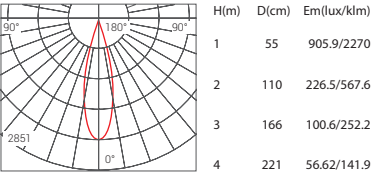


Beam Angle 38° 6W 3000K

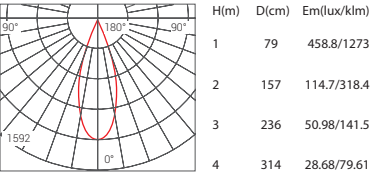

LINA

6W

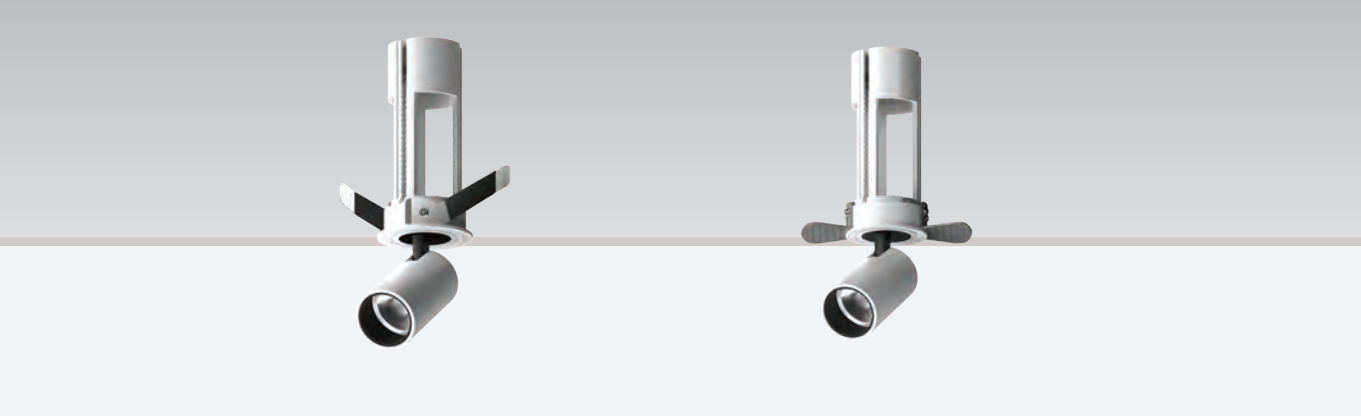

Colour:


White

Black

Gold

Chrome

Silver

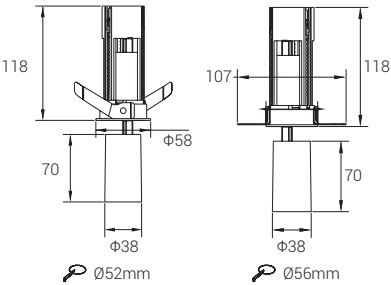

CM-LS3005E50/ LS3005T50


Model Code	LS3005E70	LS3005T50
Power	6W	6W
Cut out	Φ52mm	Φ56mm
Light Source	HONOURTEK	HONOURTEK
Size(DxH)	Φ58x118mm	Φ107x118mm

UGR	<19	<19
CRI	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	570 lm	1140 lm
Life time	50000 h	50000 h
IP	IP20	IP20

Photometric


Beam Angle 15° 6W 3000K

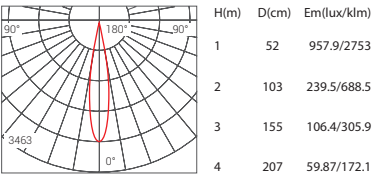


Beam Angle 24° 6W 3000K

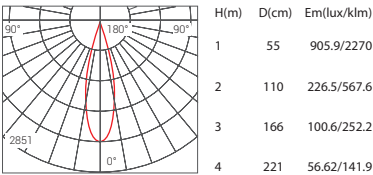

Beam Angle 38° 6W 3000K

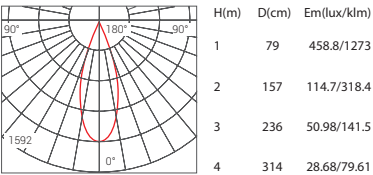

ADJUSTABLE SPOT

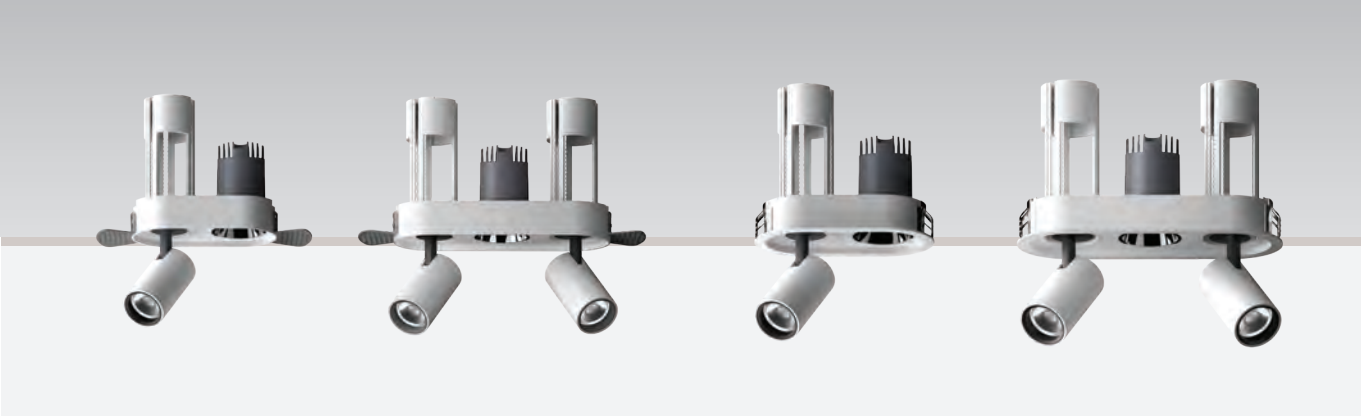

Colour:


White

Black

Gold

Chrome

Silver

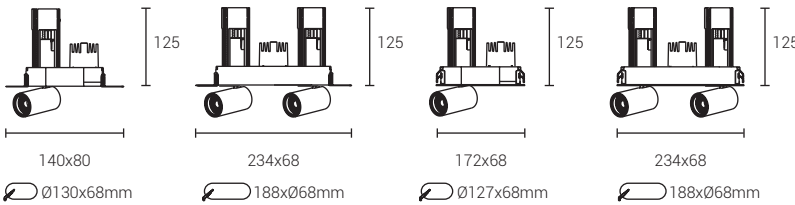

CM-LS3005E70-250 / LS3005E70-350 / LS3005T70-250 /LS3005T70-350


Model Code	LS3005E70-250	LS3005E70-350	LS3005T70-250	LS3005T70-350
Power	2X6W	2x6W	6Wx2	6Wx3
Cut out	Φ130x68	Φ188x68	Φ127x68	Φ188x68
Light Source	HONOURTEK	HONOURTEK	HONOURTEK	HONOURTEK
Size(DxH)	140x80x125	234x68x125	172x68x125	234x68x125

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	570 lm	1140 lm	1710 lm	2280 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 15° 6W 3000K

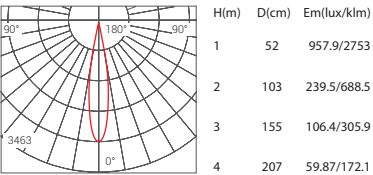

Beam Angle 24° 6W 3000K

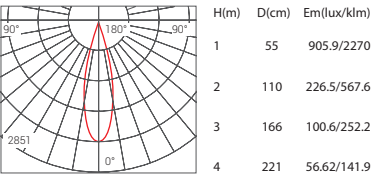

Beam Angle 38° 6W 3000K

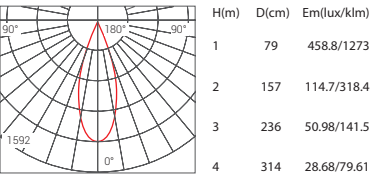

LINA

12W



Colour:

Optional :

Ø100

Ø90mm

185xØ100

175xØ90mm

270xØ100

260xØ90mm

CM-LS3005R90 / LS3005R90-2 / LS3005R90-3


Model Code	LS3005R90	LS3005R90-2	LS3005R90-3
Power	12W	2x12W	12Wx3
Cut out	Φ90mm	175xΦ90mm	260xΦ90mm
Light Source	CREE	CREE	CREE
Size(DxH)	Φ100x113mm	185xΦ100x113mm	270xΦ100x113mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1140 lm	2280 lm	3420 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 12° 12W 3000K

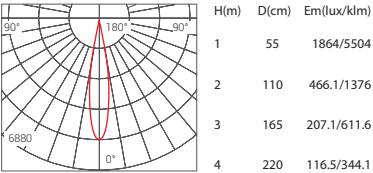

Beam Angle 24° 12W 3000K

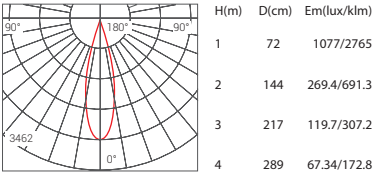

Beam Angle 38° 12W 3000K

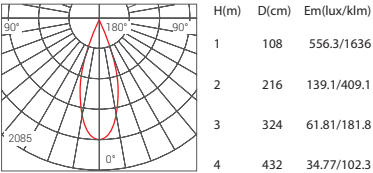

ADJUSTABLE SPOT



Colour:

Optional :

100x100

Ø90mm

185x100

175xØ90mm

270x100

260xØ90mm

CM-LS3005P90 / LS3005P90-2 / LS3005P90-3


Model Code	LS3005P90	LS3005P90-2	LS3005P90-3
Power	12W	2x12W	12Wx3
Cut out	Φ90mm	175xΦ90mm	260xΦ90mm
Light Source	CREE	CREE	CREE
Size(LxWxH)	100x100x113mm	185x100x113mm	270x100x113mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1140 lm	2280 lm	3420 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 12° 12W 3000K

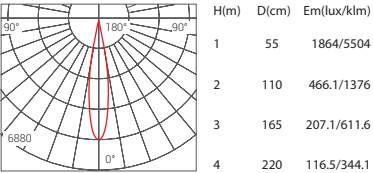

Beam Angle 24° 12W 3000K

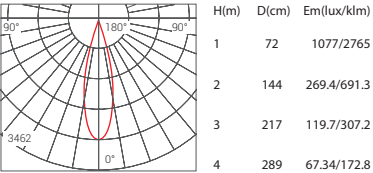

Beam Angle 38° 12W 3000K

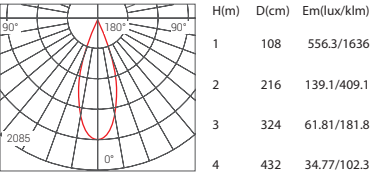

LINA

25W



Colour:

Optional :

Ø130
Ø115mm

238xØ128
225xØ115mm

348xØ128
335xØ115mm

CM-LS3005R120/ LS3005R120-2/ LS3005R120-3


Model Code	LS3005R120	LS3005R120-2	LS3005R120-3
Power	25W	25Wx2	25Wx3
Cut out	Φ115mm	225xΦ115mm	335xΦ115mm
Light Source	CREE	CREE	CREE
Size(DxH)	Φ130x129mm	238xΦ128x129mm	348xΦ128x129mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	2375 lm	4750 lm	7125 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 12° 25W 3000K

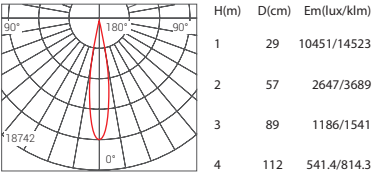

Beam Angle 24° 25W 3000K

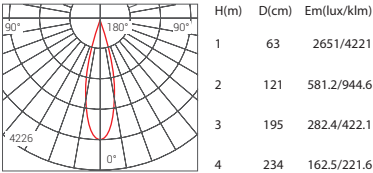

ADJUSTABLE SPOT

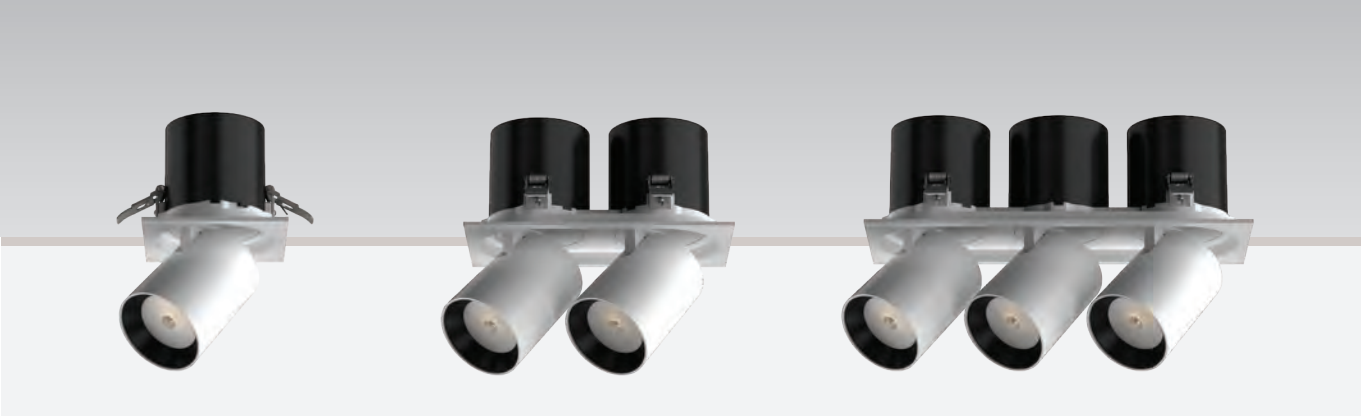

Colour:

Optional :

130x130
Ø115mm

238x130
225xØ115mm

348x130
335xØ115mm

CM-LS3005P120/ LS3005P120-2/ LS3005P120-3


Model Code	LS3005P120	LS3005P120-2	LS3005P120-3
Power	25W	25Wx2	25Wx3
Cut out	Φ115mm	225xΦ115mm	335xΦ115mm
Light Source	CREE	CREE	CREE
Size(DxH)	130x130x129mm	238x130x129mm	348x130x129mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	2375 lm	4750 lm	7125 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 12° 25W 3000K

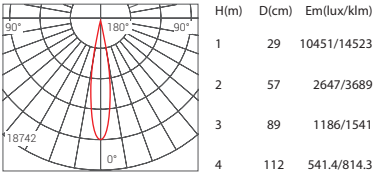



Beam Angle 24° 25W 3000K

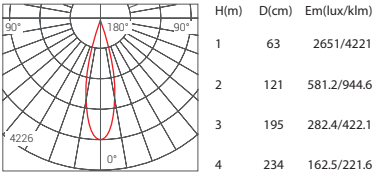

LINA

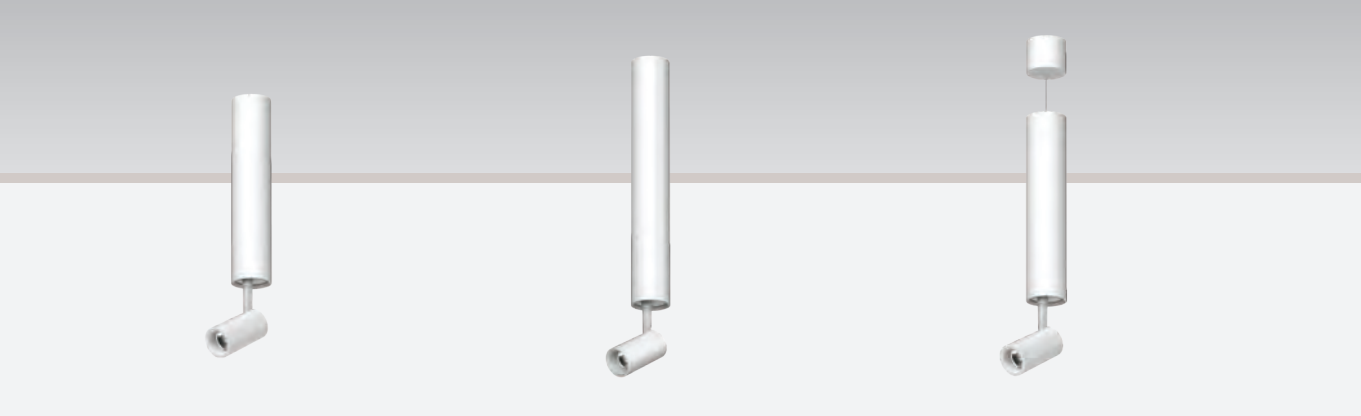

Colour:

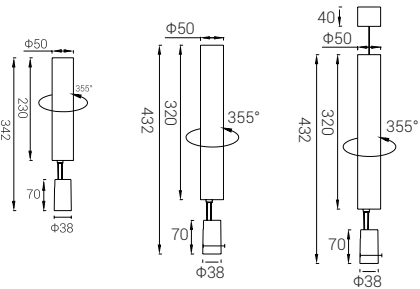

CM-LS50-MZ230/ LS50-MZ320/ LS50-DZ230


Model Code	LS50-MZ230	LS50-MZ320	LS50-DZ230
Power	6W	6W	6W
Installation	Surface	Surface	Surface
Light Source	CREE	CREE	CREE
Size(DxH)	Φ38x70mm	Φ38x70mm	Φ38x70mm
Size(DxH)	Φ50x230	Φ50x320	Φ50x230

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	570 lm	1140 lm	2375 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 12° 12W 3000K

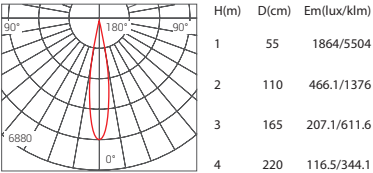


Beam Angle 24° 12W 3000K

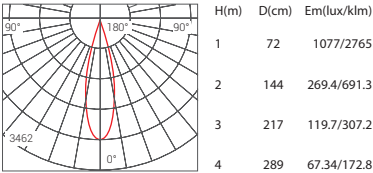



Beam Angle 38° 12W 3000K

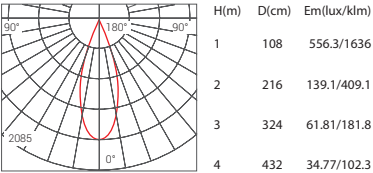

ADJUSTABLE SPOT

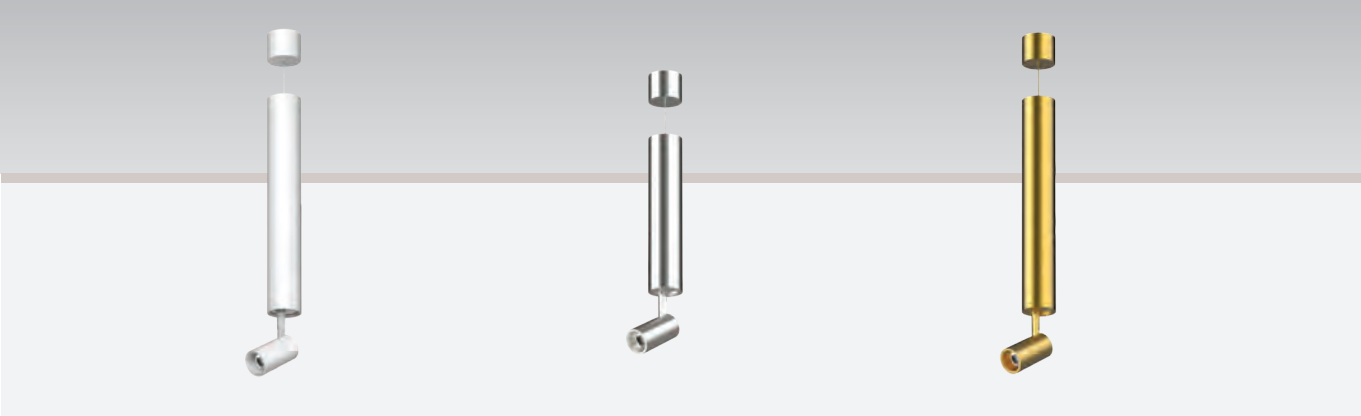

Colour:

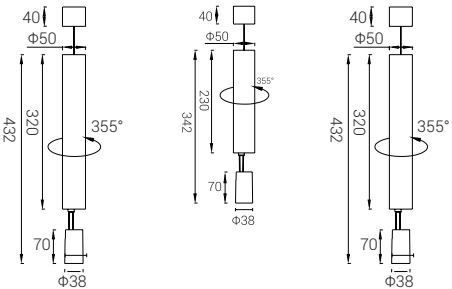

LS50-DZ320 / LS50-DZ230 / LS50-DZ320


Model Code	LS50-DZ320	LS50-DZ230	LS50-DZ320
Power	6W	6W	6W
Installation	Surface	Surface	Surface
Light Source	CREE	CREE	CREE
Size(DxH)	Φ38x70mm	Φ38x70mm	Φ38x70mm
Size(DxH)	Φ50x320	Φ50x230	Φ50x320

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	570 lm	1140 lm	2375 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 12° 12W 3000K

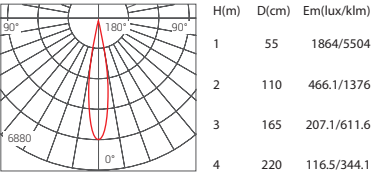

Beam Angle 24° 12W 3000K

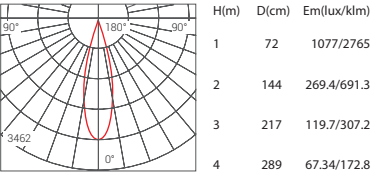


Beam Angle 38° 12W 3000K

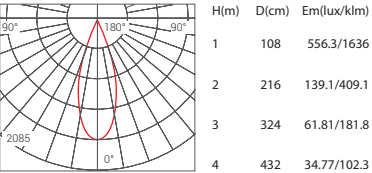



- Reliable Material: Die-cast aluminum material guarantees corrosion protection and rust prevention. The heat sink is composed of it will cool fuller and faster.
- Adjustable design: 90°tilt and 350°rotation. The rotatable Downlight is perfect for sloped ceilings as the LED can pivot and rotate for illumination where most wanted.
- Mounting optical accessories: honeycomb grid; Effectively prevent excess astigmatism.
- Suitable for retail basic lighting, store key lighting, supermarket key and basic lighting.

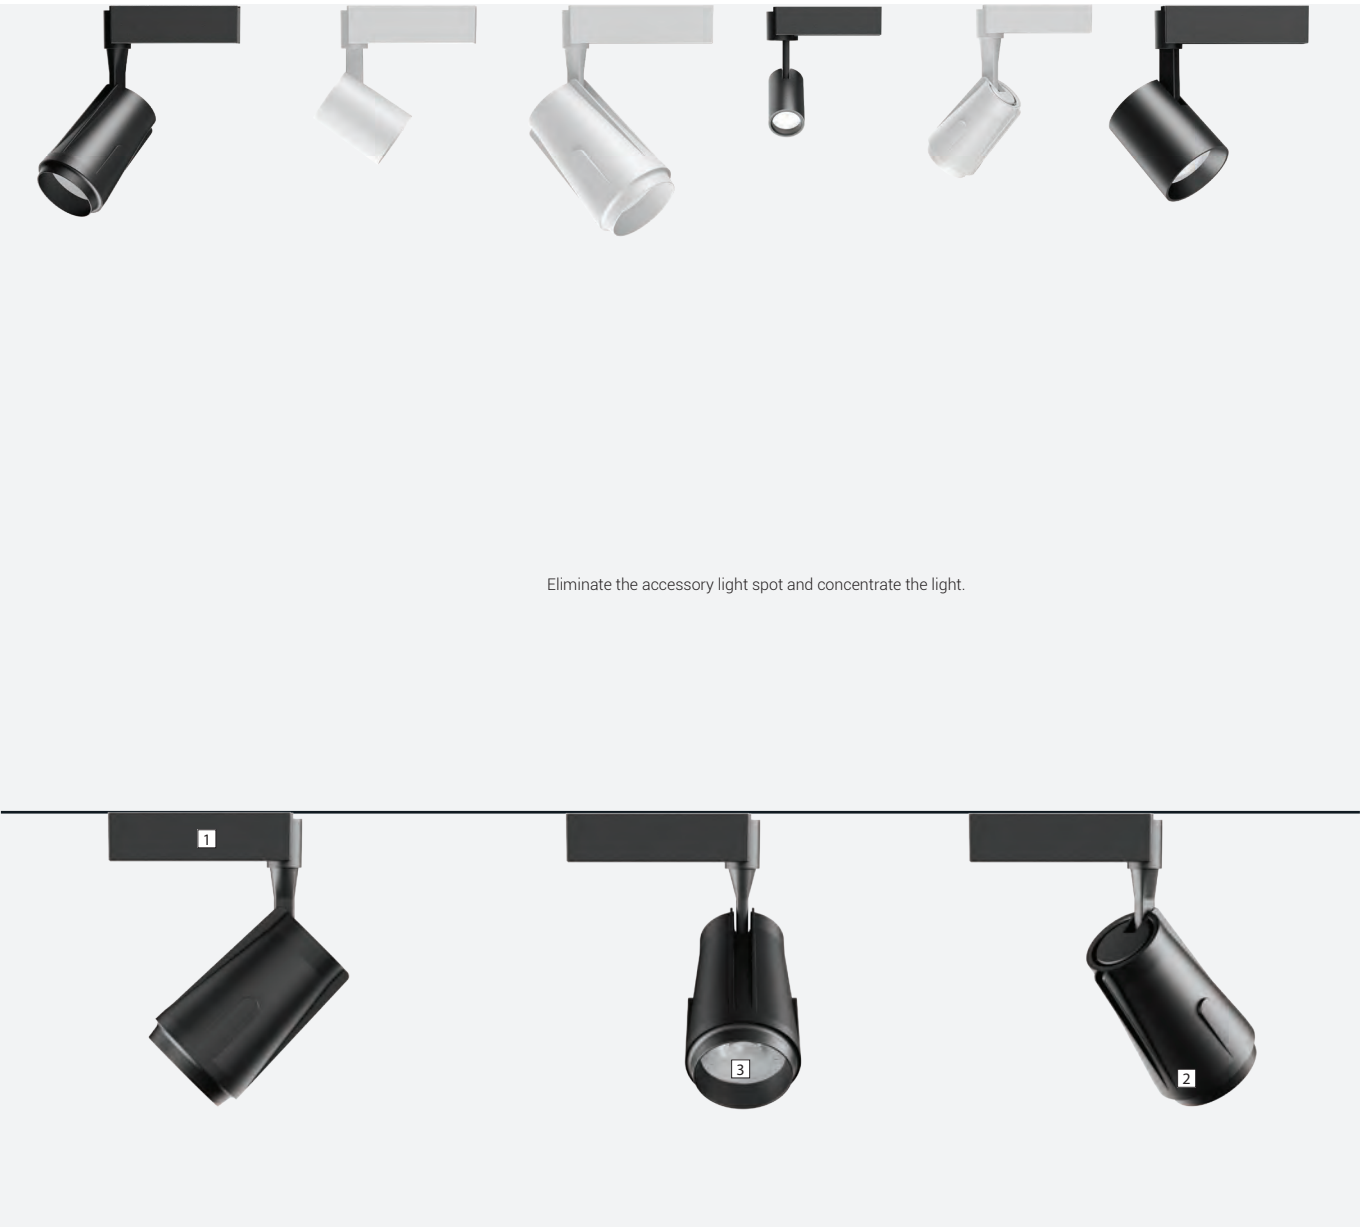

Track light

The whole system is equipped with cast aluminum electrical box, excellent heat dissipation, effectively protect the long life of electrical appliances. Various powers and angles allow the light to shine wherever you want in the space.

- 1

Flexible replacement of supporting optical devices, guide rail can be matched with two, three and four lines.
- 2

Beam Angle rich, 15°/24°/38°/45°/60° various options.
- 3


High quality COB, ensures high durability of the light fixture, CRI>90.

LARRY



Optional :    

Honey comb Soft Lens Square Stripe

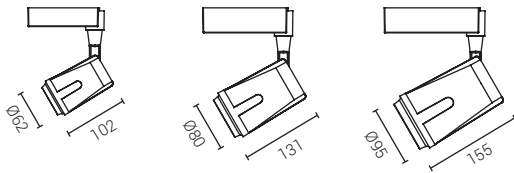

CM-T3006A-12W / T3006A-22W / T3006A-32W


Model Code	T3006A-12W	T3006A-22W	T3006A-32W
Power	12W	22W	32W
Installation	Track	Track	Track
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ62x102mm	Φ80x131mm	Φ95x155mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°/45°/60°	15°/24°/38°/45°/60°	15°/24°/38°/45°/60°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1176 lm	2156 lm	3136 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 15° 12W 3000K

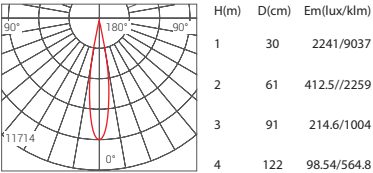

Beam Angle 24° 12W 3000K

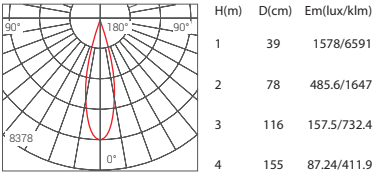

Beam Angle 38° 12W 3000K

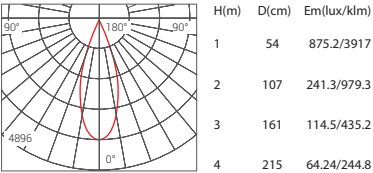


TRACK LIGHT



Optional :    

Honey comb Soft Lens Square Stripe

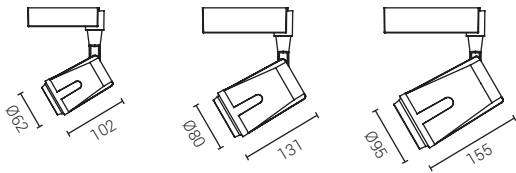

CM-T3006P-12W / T3006P-22W / T3006P-32W


Model Code	T3006P-12W	T3006P-22W	T3006P-32W
Power	12W	22W	32W
Installation	Track	Track	Track
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ62x102mm	Φ80x131mm	Φ95x155mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°/45°/60°	15°/24°/38°/45°/60°	15°/24°/38°/45°/60°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	1176 lm	2156 lm	3136 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 15° 22W 3000K

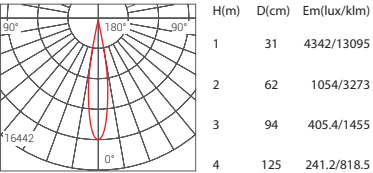


Beam Angle 24° 22W 3000K

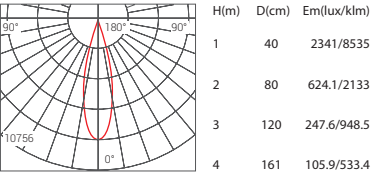


Beam Angle 38° 22W 3000K

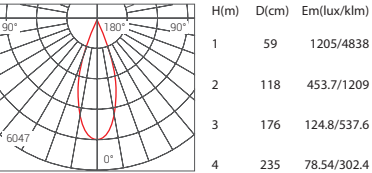

LARRY

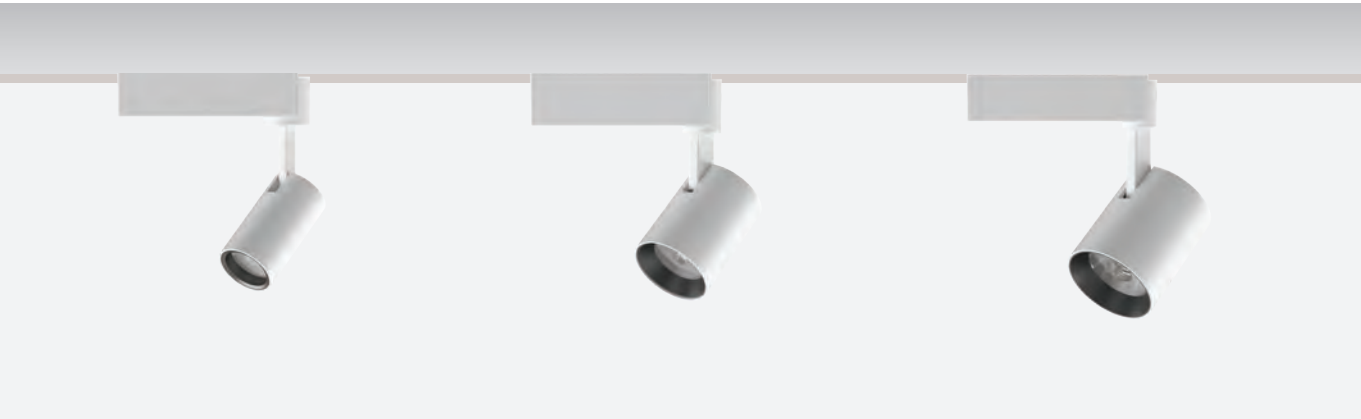

Optional :    
Honey comb Soft Lens Square Stripe

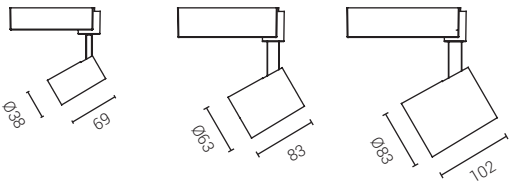

CM-T3005A-7W / T3005A-12W / T3005A-25W


Model Code	T3005A-7W	T3005A-12W	T3005A-25W
Power	7W	12W	25W
Installation	Track	Track	Track
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ62x102mm	Φ80x131mm	Φ95x155mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	686 lm	1176 lm	2450 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 12° 12W 3000K

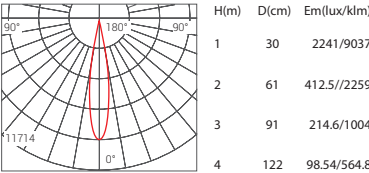

Beam Angle 24° 12W 3000K

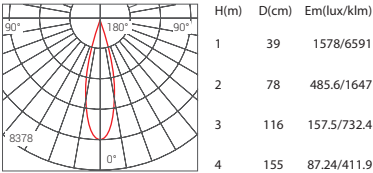


Beam Angle 38° 12W 3000K

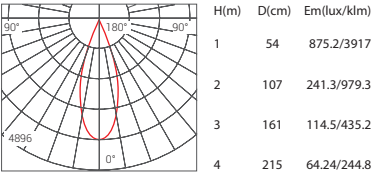

TRACK LIGHT



Optional :    
Honey comb Soft Lens Square Stripe

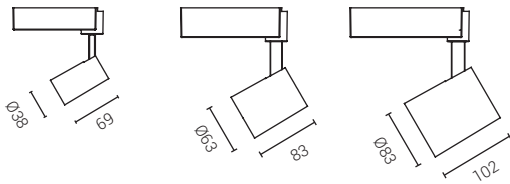

CM-T3005P-7W / T3005P12W / T3005P-25W


Model Code	T3005P-7W	T3005P12W	T3005P-25W
Power	7W	12W	25W
Installation	Track	Track	Track
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ62x102mm	Φ80x131mm	Φ95x155mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	686 lm	1176 lm	2450 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 12° 12W 3000K

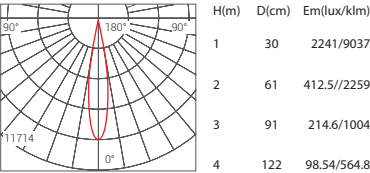

Beam Angle 24° 12W 3000K

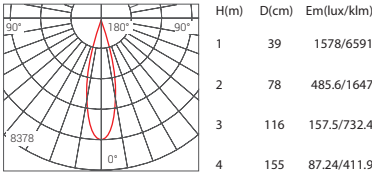

Beam Angle 38° 12W 3000K

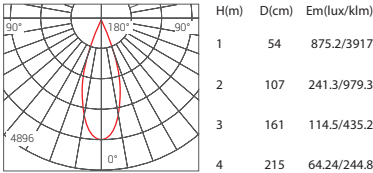






4000K

5000K

- No-screws appearance provide a neat and clean effect.
- Round and square two shapes provide customers selection per requests.
- General lighting or guide for museums, exhibitions, art galleries, offices, residence and also in commercial applications.

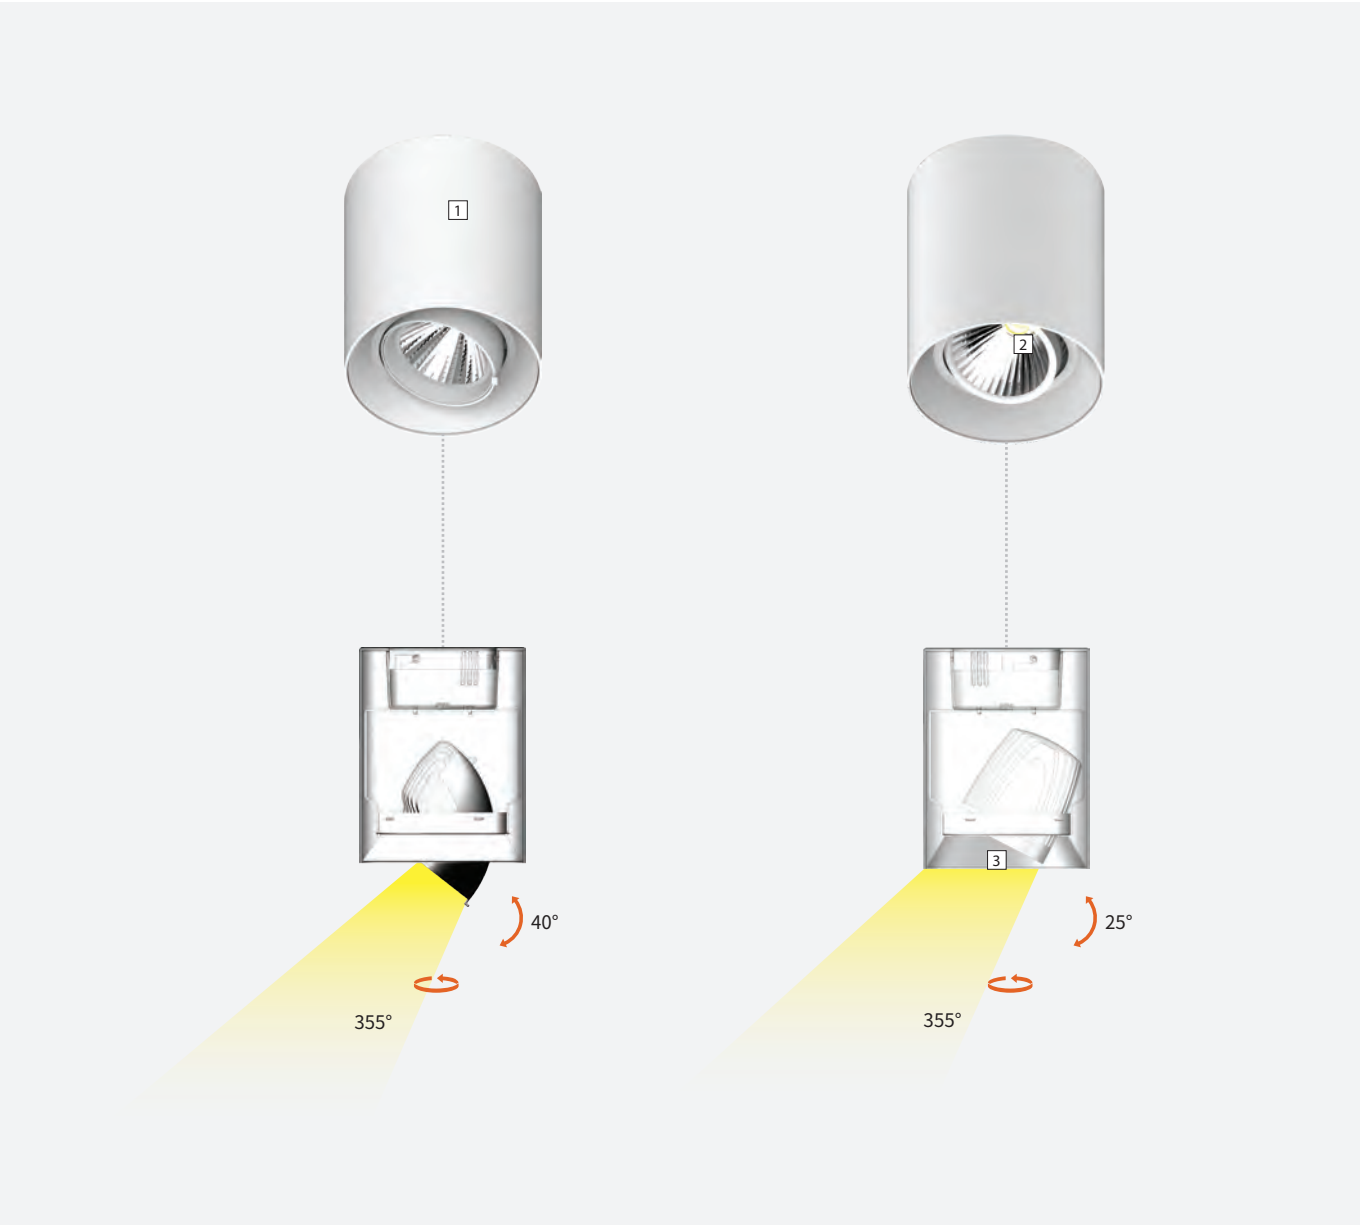

Surface Downlight

New mechanisim design ensure better function on 355° horizontal rotation and 40° titling.


- 1

Driver built-in easy for installation.
- 2

Efficient thermal management guarantee long lifespan.
- 3

Different beam angle reflectors available for spot or general lighting effect.

LORI

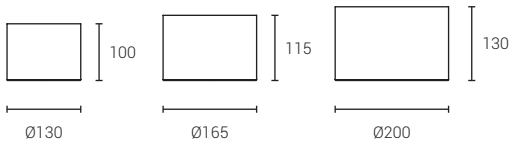

CM-MZ7005SMD


Model Code	MZ7005SMD	MZ7005SMD	MZ7005SMD
Power	10W	20W	30W
Installation	Surface	Surface	Surface
Light Source	EPISTAR	EPISTAR	EPISTAR
Size(LxWxH)	Φ130x100mm	Φ165x115mm	Φ200x130mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	120°	120°	120°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	900 lm	1800 lm	2700 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 120° 10W 3000K

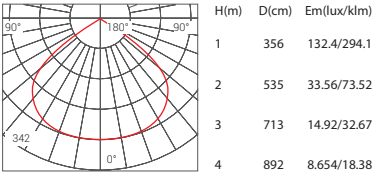


Beam Angle 120° 20W 3000K

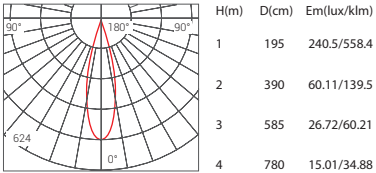

Beam Angle 120° 30W 3000K

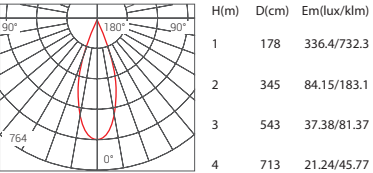

DOWNLIGHT

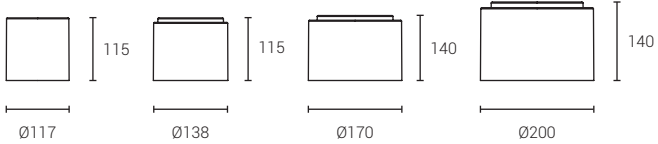

MZ7006R


Model Code	MZ7006R	MZ7006R	MZ7006R	MZ7006R
Power	10W	15W	20W	30W
Installation	Surface	Surface	Surface	Surface
Light Source	CREE	CREE	CREE	CREE
Size(LxWxH)	Φ117x115mm	Φ138x115mm	Φ170x140mm	Φ200x140mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	38°	38°	38°	38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	900 lm	1350 lm	1800 lm	2700 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 38° 10W 3000K

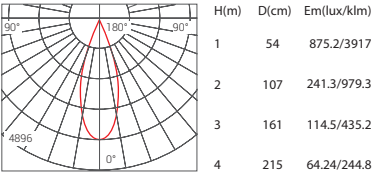



Beam Angle 38° 20W 3000K

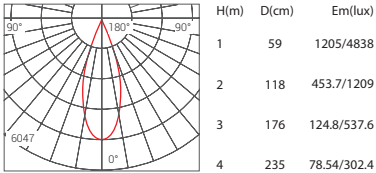

Beam Angle 38° 30W 3000K

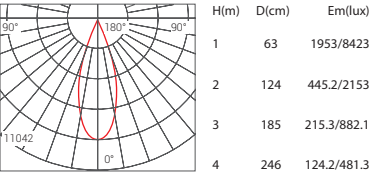

LORI

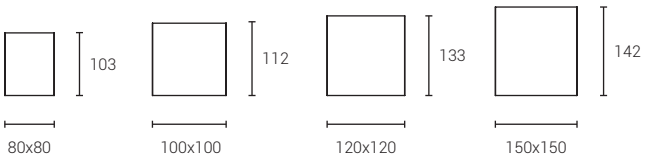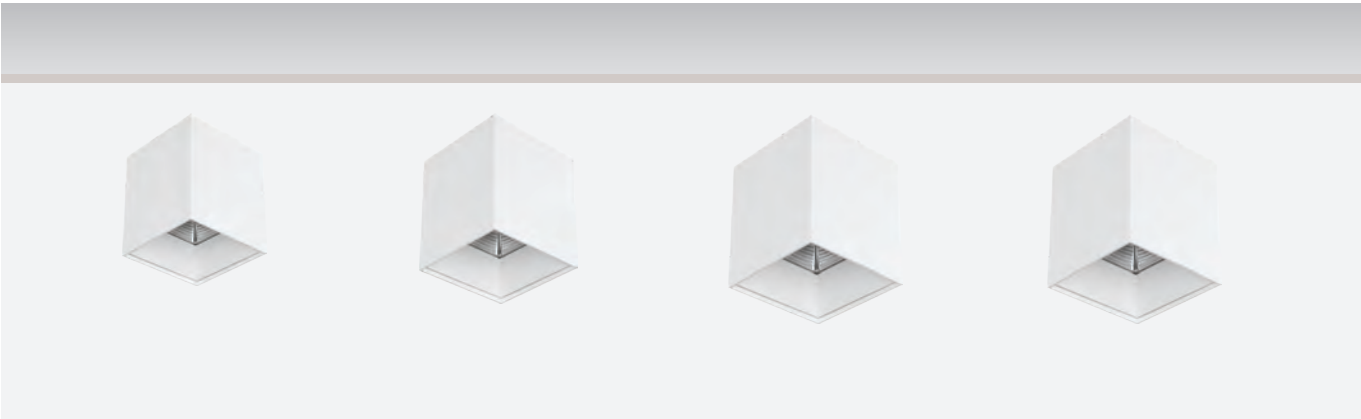

CM-MZ7006S


Model Code	MZ7006S	MZ7006S	MZ7006S	MZ7006S
Power	10W	15W	20W	25W
Installation	Surface	Surface	Surface	Surface
Light Source	CREE	CREE	CREE	CREE
Size(LxWxH)	80x80x103mm	100x100x112mm	120x120x133mm	150x150x142mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	38°	38°	38°	38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	900 lm	1350 lm	1800 lm	2250 lm
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

Photometric


Beam Angle 38° 10W 3000K

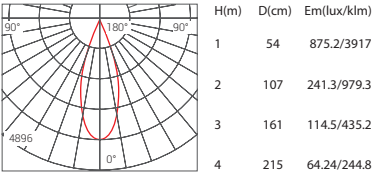



Beam Angle 38°15W 3000K

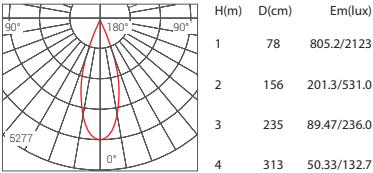

Beam Angle 38° 20W 3000K

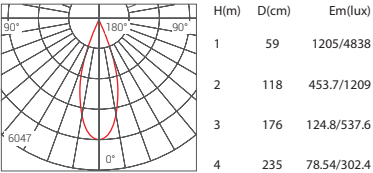

DOWNLIGHT

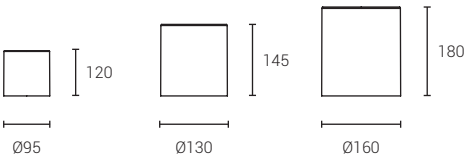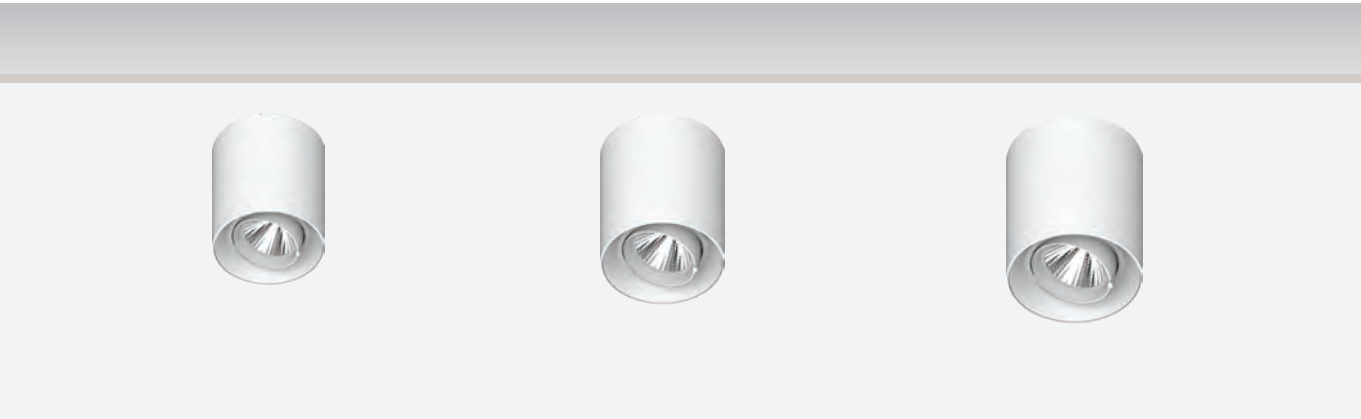

CM-MZ7007R


Model Code	MZ7009R	MZ7009R	MZ7009R
Power	15W	25W	30W
Installation	Surface	Surface	Surface
Light Source	CREE	CREE	CREE
Size(LxWxH)	Φ95x120mm	Φ130x145mm	Φ160x180mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	900 lm	1350 lm	1800 lm
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

Photometric


Beam Angle 15° 10W 3000K


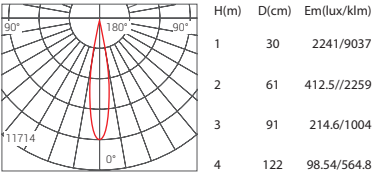


Beam Angle 24° 10W 3000K

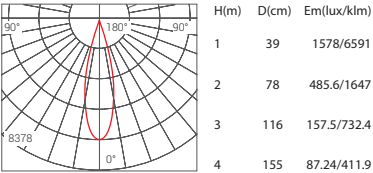

Beam Angle 38° 10W 3000K

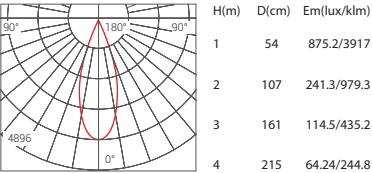

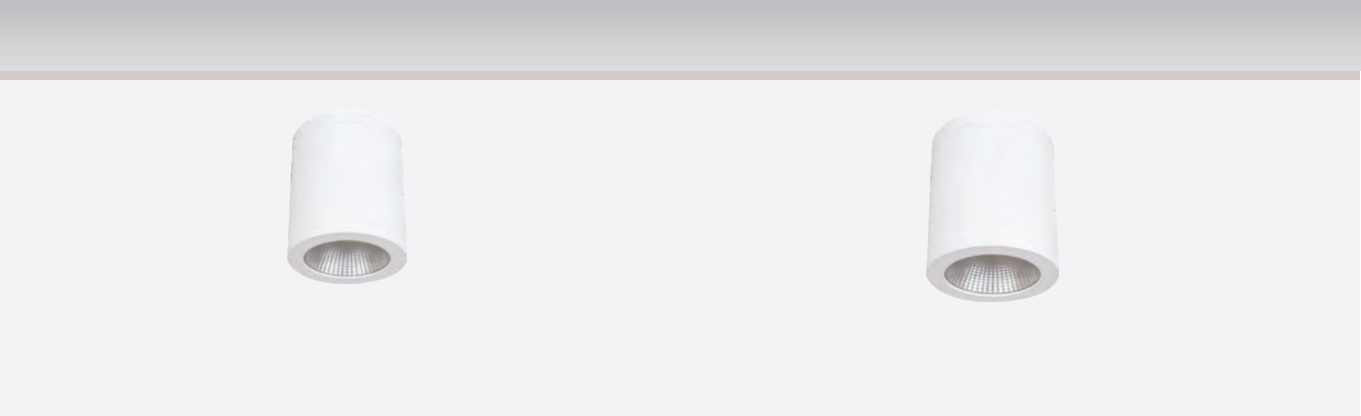

CM-MZ7008S


Model Code	MZ7008S	MZ7008S
Power	40W	40W
Installation	Surface	Surface
Light Source	CREE	CREE
Size(LxWxH)	Φ156x180mm	Φ156x210mm

UGR	<19	<19
CRI	≥80/≥90	≥80/≥90
Beam angle	24°/38°	24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	3600 lm	3600 lm
Life time	50000 h	50000 h
IP	IP44	IP65

Photometric

Beam Angle 24° 40W 3000K

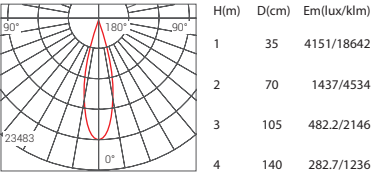

Beam Angle 38° 40W 3000K

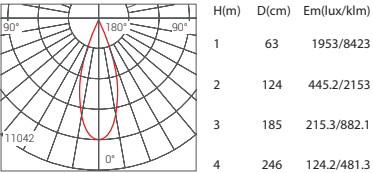

Dimming

New mechanism design ensure better function on 355° HORIZONTAL rotation and 40° titling .
Invisible high quality silicons promise more stable position with simple and elegant outlook .
It is used in commercial venues such as exhibition halls, galleries, bars, cafes and dining outlets.

