LED Linear Lighting

www.comled.com.au

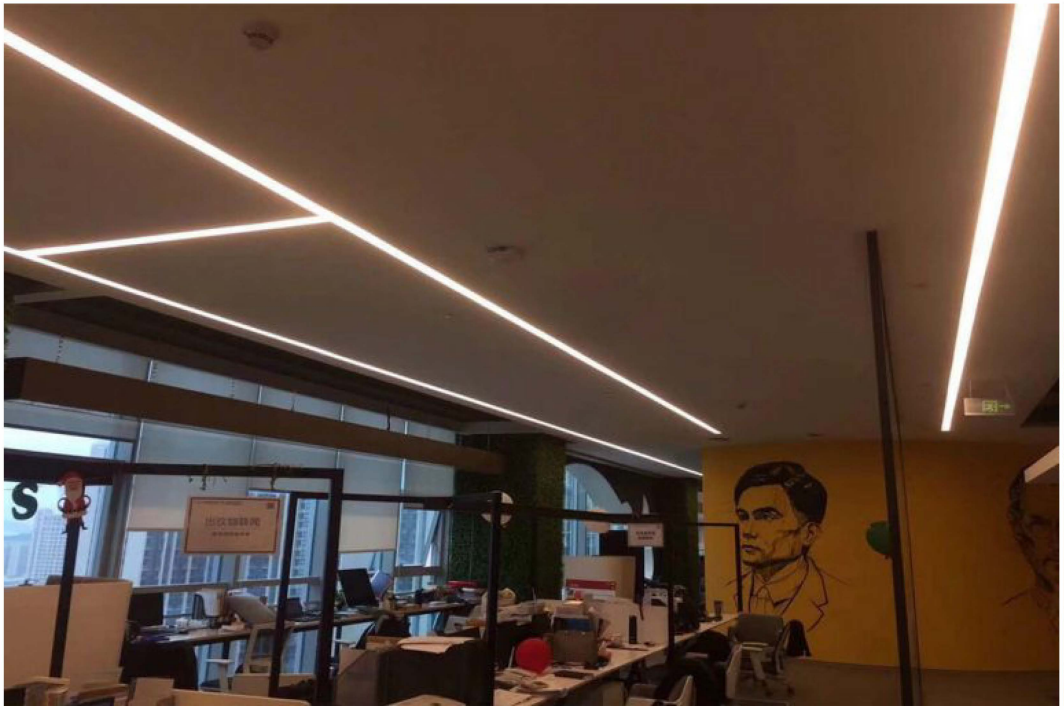

5566 Series

Suspended

Batwing Diffuser

CM-5566-L4
Size: L1200*W66*H55mm
Power: 40W
Lumen: 4836lm
UGR<22 Ra90
Beam angle: 90°
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Suspended or Surface

Comments: Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

Honeycomb

CM-5566-LW4
Size: L1200*W66*H55mm Power: 40W
Lumen: 1585lm
UGR<16 Ra90
Beam angle: 60°
CCT: 3000K/4000K
Body color: Black or White
Voltage: 230VAC
Suspended or Surface

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

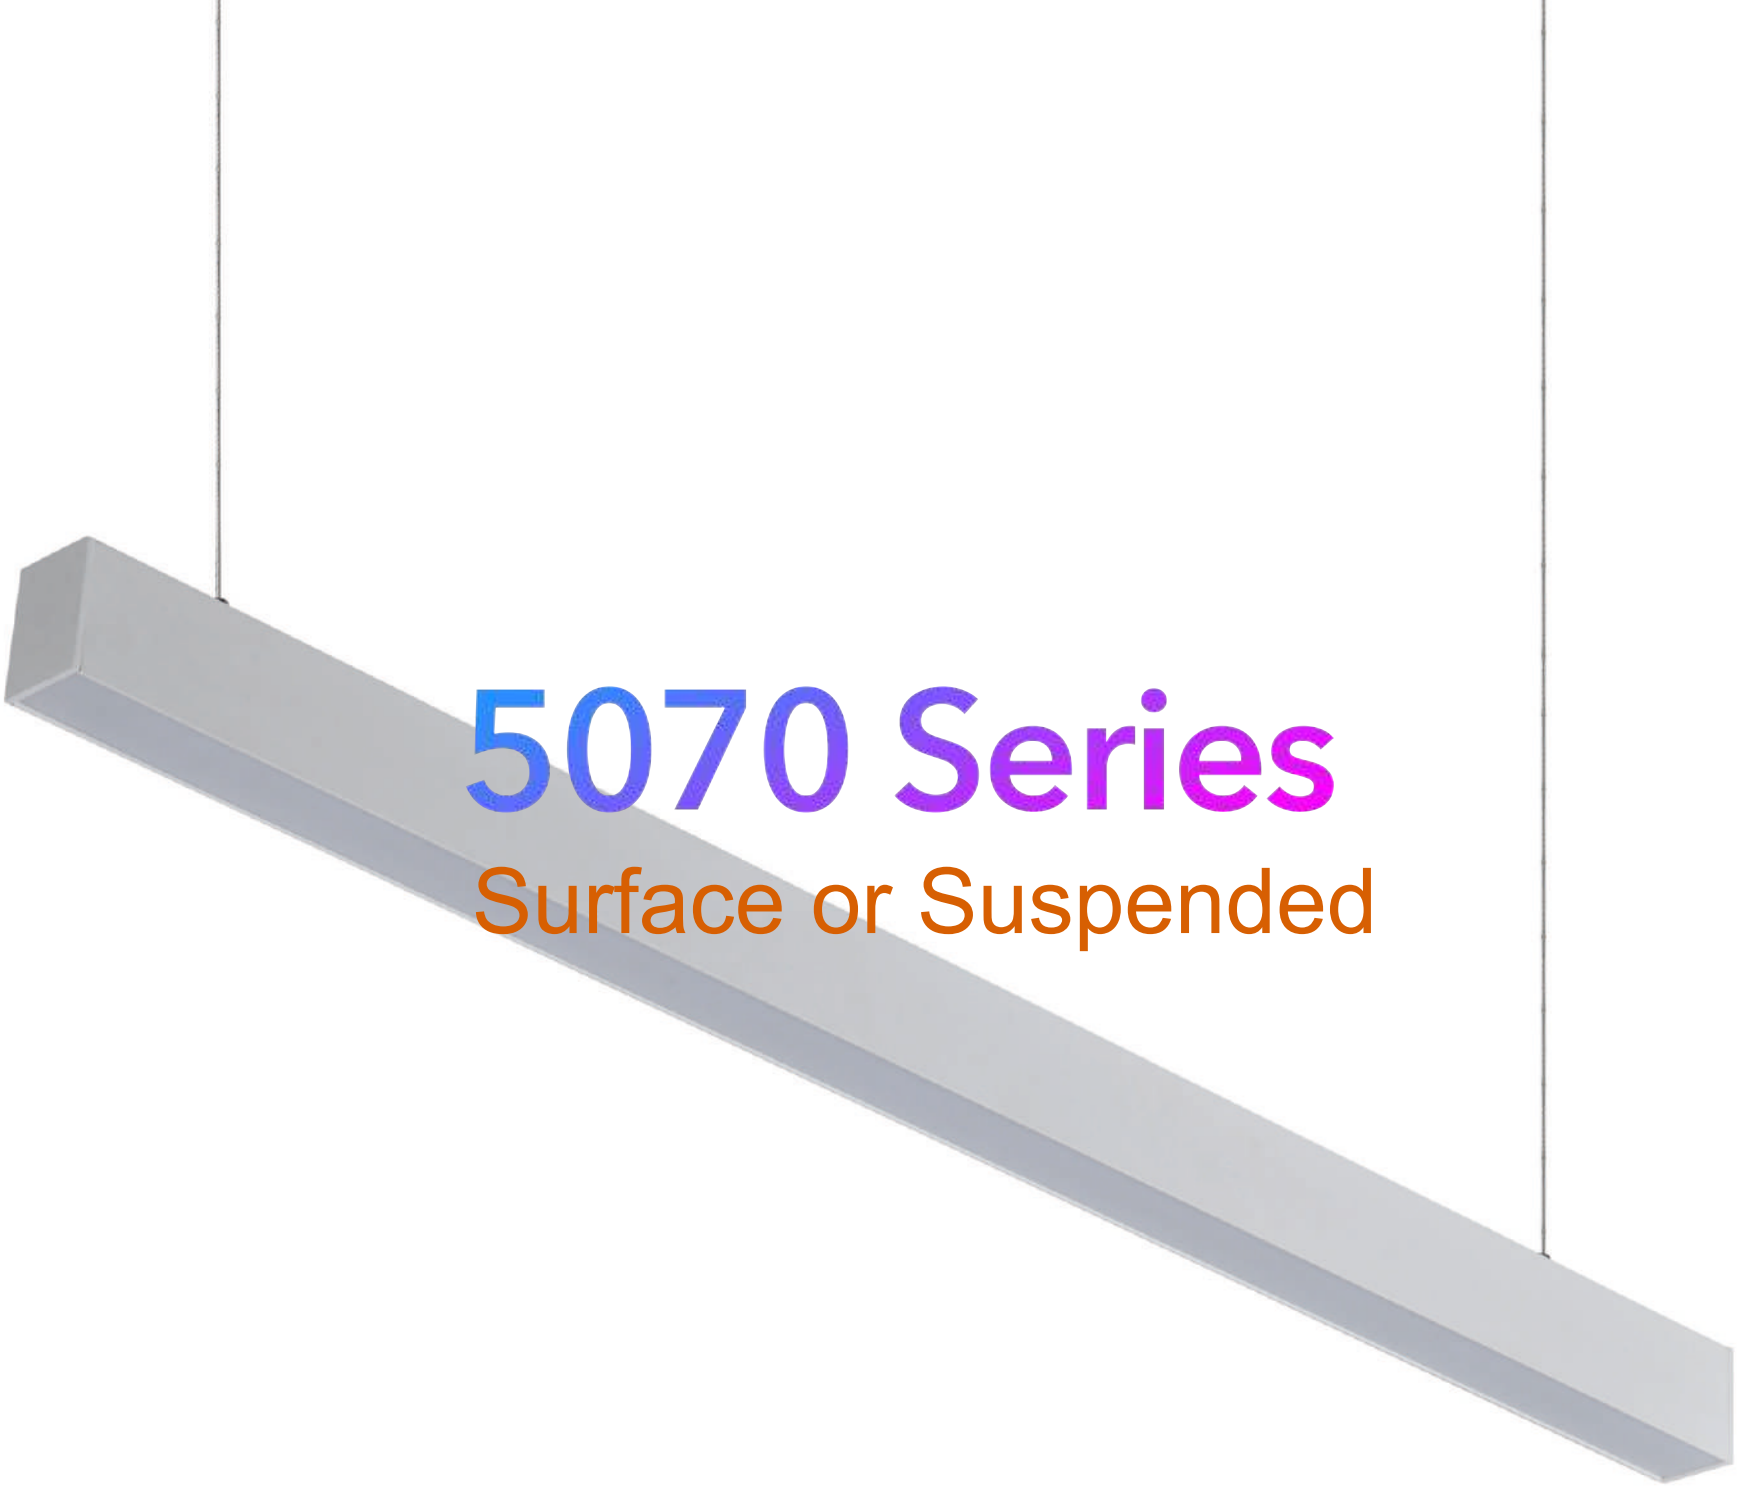

5070 Series

Surface or Suspended

Opal Diffuser

CM-5070-PC
Size: L1200*W50*H70mm
Power: 36W Lumen: 2980lm
UGR<16 Ra90
CCT: 3000K/4000
Body colour: Black or White
Voltage: 230VAC
Surface or Suspended

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation

Diffuser: 25M/Roll

Honeycomb

CM-5070-PCW
Size: L1200*W50*H70mm
Power: 36W
Lumen: 1512lm
UGR<16 Ra90
Beam angle: 60°
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Surface or Suspended

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

Micro Prismatic

CM-5070-PCL
Size: L1200*W50*H70mm
Power: 36W
Lumen: 2950lm
UGR<20 Ra90
Beam angle: 90°
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Surface or Suspended

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

Wall Wash

CM-PL8
Size: L1200*W50*H70mm
Power: 36W
Lumen: 2950lm
UGR<20 Ra90
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Surface or Suspended

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

5070 Series

Combination options:

- Spotlight + diffuser;
- Only mini down lights;
- Down lights + 3CCT Track;
- 3CCT Track only;
- Wall washer lens;

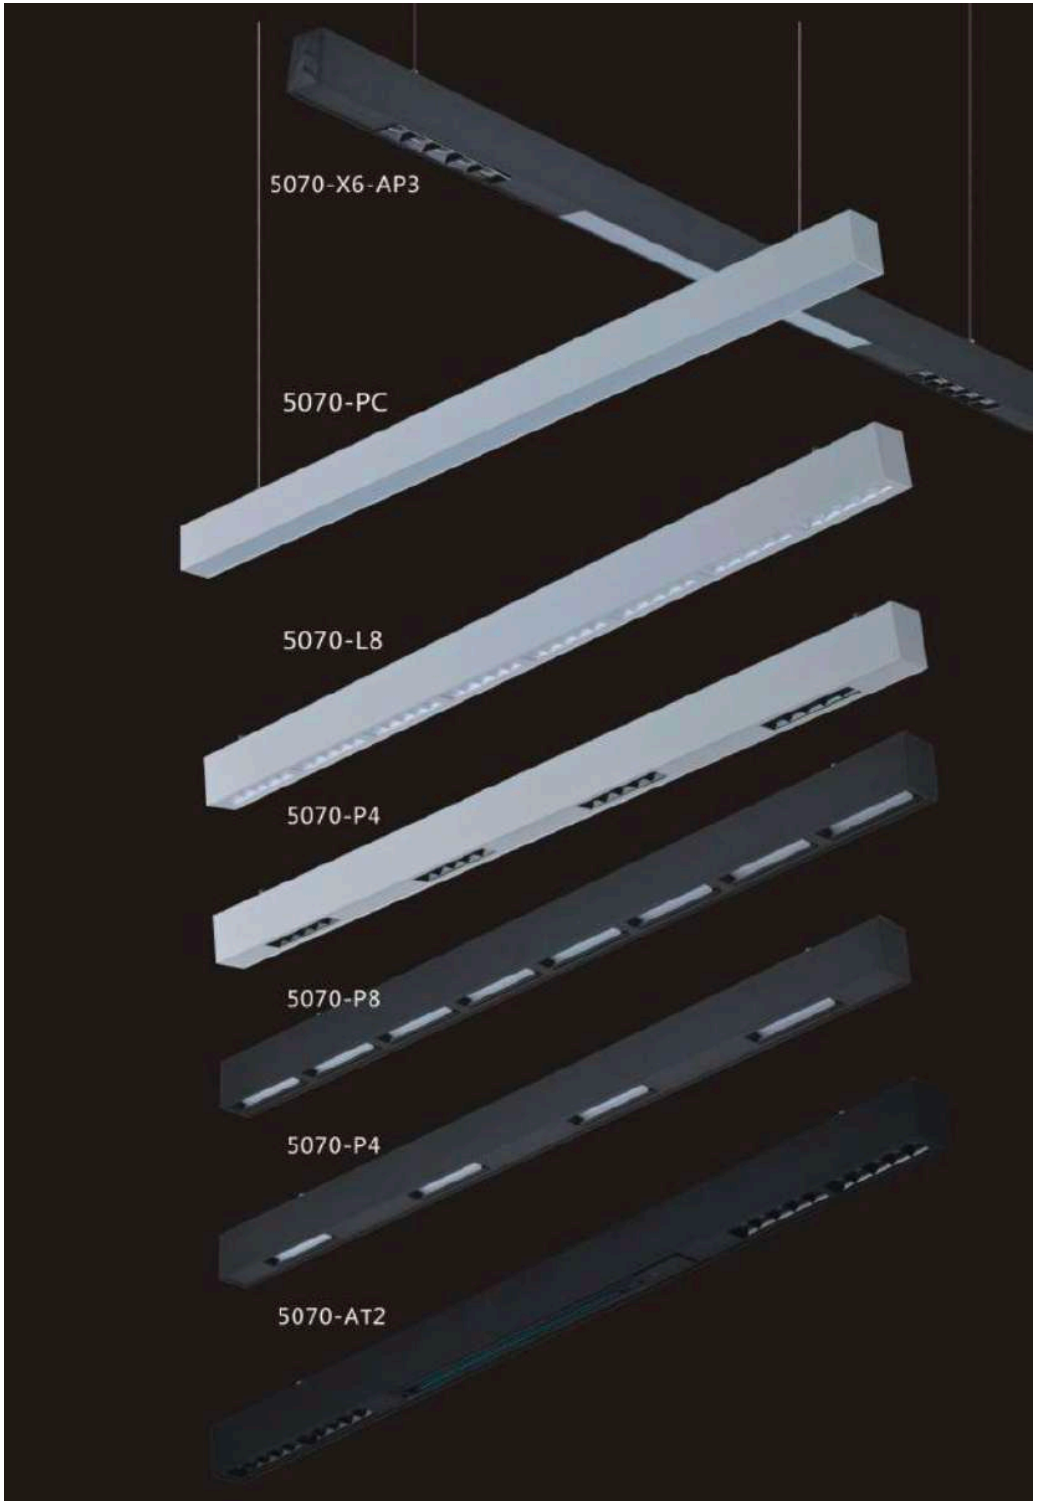

4375 Series

Surface or Suspended

Opal Diffuser

CM-4375-PC Size:
L1200*W43*H75mm Power: 35W
Lumen: 2980lm
UGR<22 Ra90
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Surface or suspended

Comments: Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

Diffuser: 25M Roll

Mini Down Lights

CM-4375-L9-R (Square/ Round Cup) Size: L1200*W50*H70mm
Power: 36W
Lumen: 3580lm
UGR<19 Ra90
Beam angle: 15°/30°/45°
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Surface or Suspended

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

4375 Series

Combination options:

- Spotlight + diffuser;
- Only mini down lights;
- Down lights + 3CCT Track;
- 3CCT Track only;
- Wall washer lens;

2560 Series

MINI Suspended

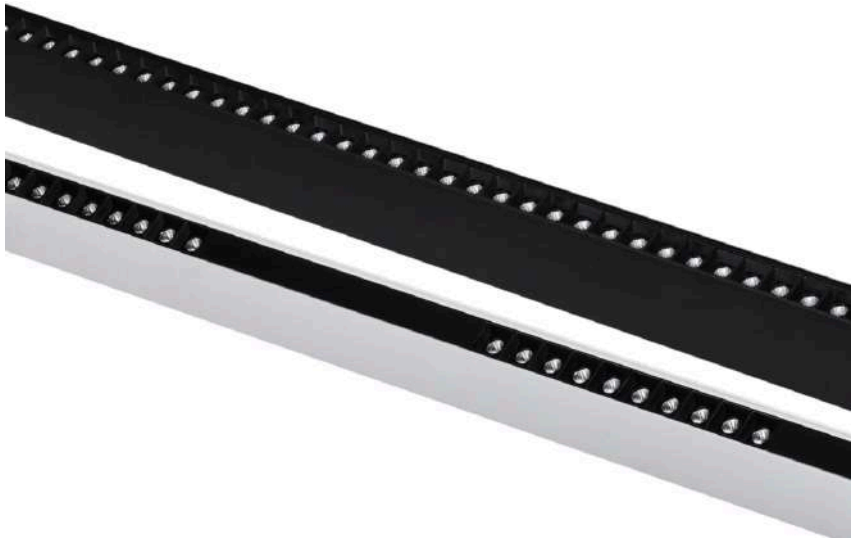

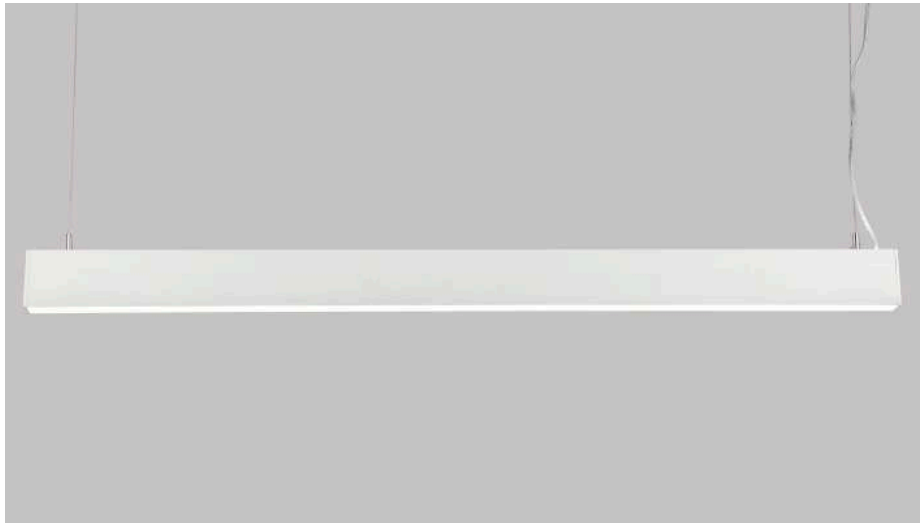

Deep Mini Down Lights

CM-2560-L14
Size: L1150*W25*H60mm
Power: 36W
Lumen: 2710lm
UGR<16 Ra90
Beam angle: 30°
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Suspended

Light Direction: Down

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

Opal Diffuser

CM-2560-PC
Size: L1150*W25*H60mm
Power: 36W
Lumen: 2890lm
UGR<22 Ra90
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC Suspended

Light Direction: Down

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

4085 Series
Suspended | UP & Down light

Grate

CM-4085
Size: L1205*W40*H85mm
Power: 36W
Lumen: 1893lm
UGR<16 Ra90
Beam angle: 70°
CCT: 3000K/4000K
Body color: Black or White
Voltage: 230VAC
Suspended Mounted

Light Direction: Down

Comments: Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

Black colour grate is the most effective at controlling glare.

Grate & Opal Diffuser

CM-4085
Size: L1205*W40*H85mm
Power: 36W+36W
Lumen: 1260/1893lm
UGR<16 Ra90
Beam angle: 70° + 120°
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Suspended Mounted

Light Direction: Down & Up

Comments: Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

Black colour grate is the most effective at controlling glare.

3580 Series
Suspended | UP & Down light

Deep Mini Down Lights

CM-3580-L9
Size: L1200*W35*H80mm
Power: 36W
Lumen: 3420lm
UGR<16 Ra90
Beam angle: 15°/30°/45°
CCT: 3000K/4000K
Body color: Black or White
Voltage: 230VAC
Suspended Mounted

Light Direction: Down

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

Opal Diffuser

CM-3580-PC
Size: L1200*W35*H80mm
Power: 36W
Lumen: 2660lm
UGR<16 Ra90
CCT: 3000K/4000/6000K
Body color: Sand black / Sand White
Voltage: 220VAC
Suspended Mounted

Light Direction: Down

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for eas installation.
PC Cover 25M/Roll

Deep Mini Down Lights

CM-3580-L9 PC+ Anti-glare
Size: L1200*W35*H80mm
Power: 36W+36W
Lumen: 2660lm/3420lm
UGR<16 Ra90
Beam angle: 90° +15°/30°/45°
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Suspended Mounted

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

Light Direction: Down & Up

Opal Diffuser

CM-3580-PC + PC
Size: L1200*W35*H80mm
Power: 36W + 36W
Lumen: 2660lm / 2660lm
UGR<16 Ra90
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Suspended Mounted

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

Light Direction: Down & Up

2790 Series
MINI UP & Down light

Deep Mini Down Lights

CM-2790-L14
Size: L1190*W27*H90mm
Power: 36W+36W
Lumen: 2710m
UGR<16 Ra90
Beam angle: 30°
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Suspended Mounted

Light Direction: Down & Up

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

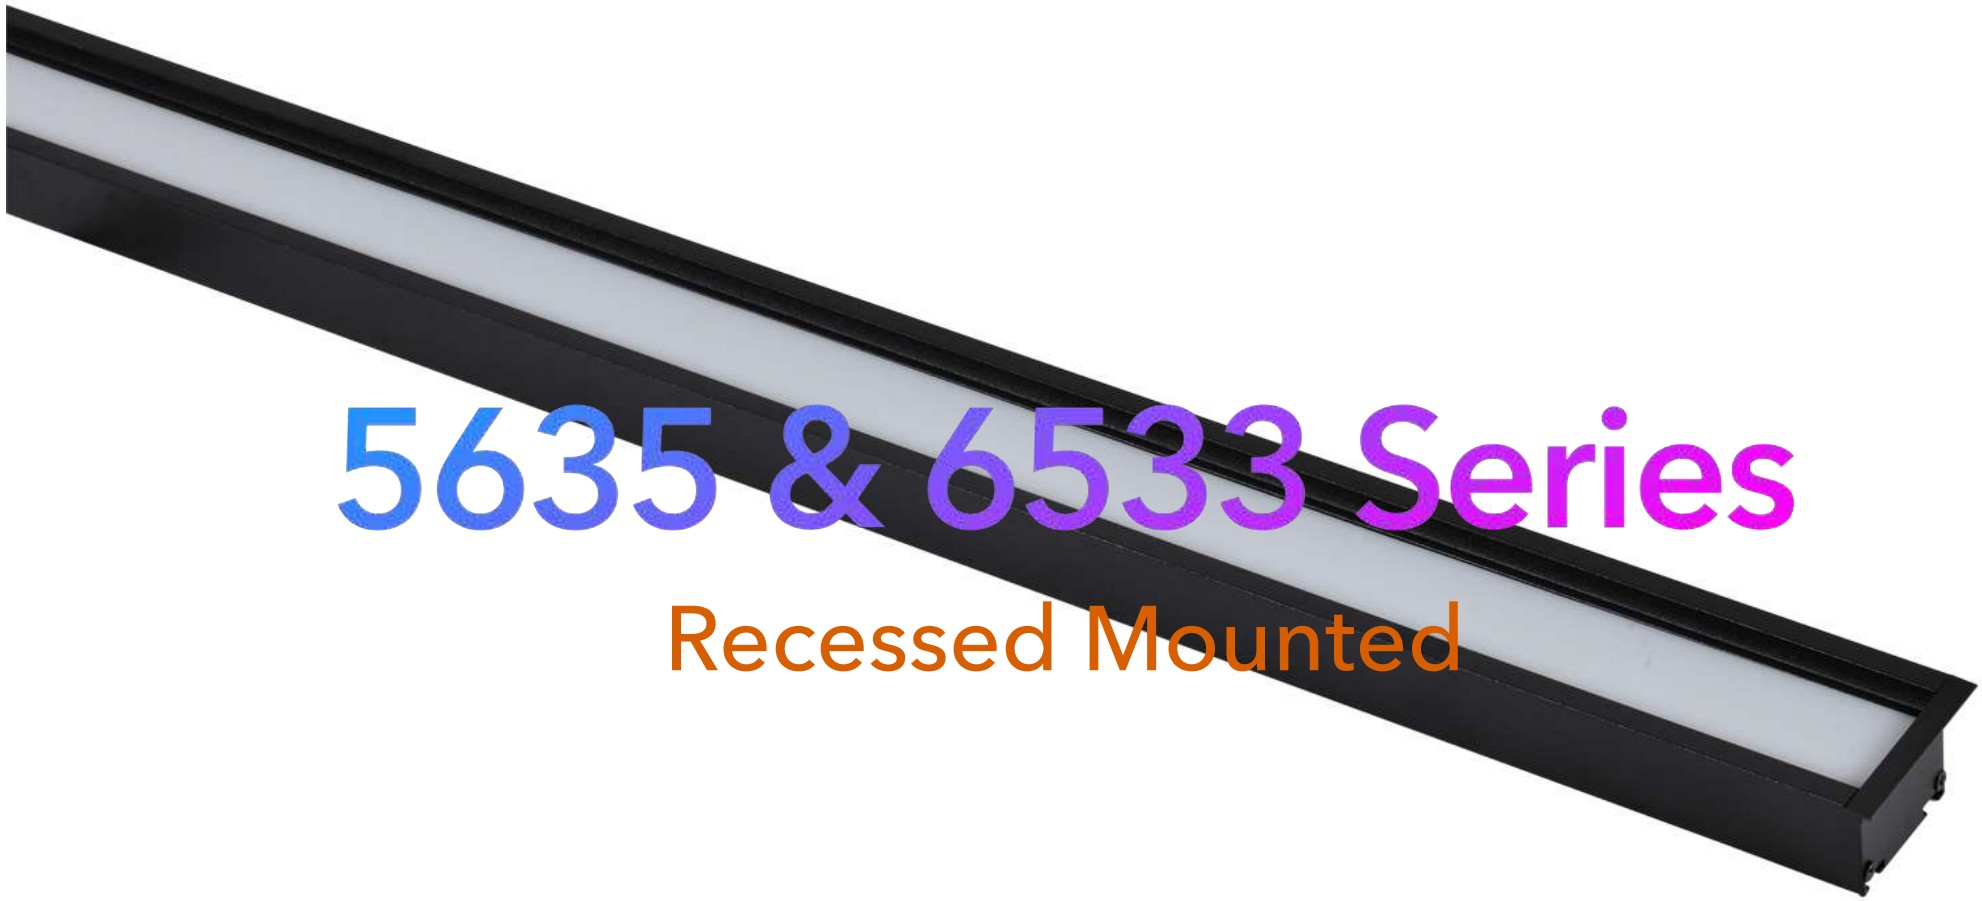

5635 & 6533 Series

Recessed Mounted

Opal Diffuser

CM-6533-PC
Size: L1200*W65*H33mm
Power: 36W
Lumen: 2890lm
UGR<22 Ra90
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Recessed Mounted

Comments:
Length can be
customised to suit project
requirements. Seamless quick
connect system for ease of
installation.
PC Cover 25M/Roll

Deep Mini Down Lights

CM-6533-L8
Size: L1200*W65*H33mm
Power: 36W
Lumen: 2310lm
UGR<19 Ra90
Beam angle: 15°/30°/45°
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Recessed Mounted

Comments:
Length can be
customised to suit project
requirements. Seamless quick
connect system for ease of
installation.

Wall Wash

CM-6533-P8
Size: L1200*W65*H33mm
Power: 40W
Lumen: 1650lm
UGR<22 Ra90
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Recessed Mounted

Comments:
Length can be
customised to suit project
requirements. Seamless quick
connect system for ease of
installation.

Opal Diffuser

CM-5635-PC
Size: L1200*W56*H35mm
Power: 36W
Lumen: 3060lm
UGR<22 Ra90
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Recessed Mounted

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.
PC Cover 25M/Roll

Deep Mini Down Lights

CM-5635-L9
Size: L1200*W56*H35mm
Power: 36W
Lumen: 2710lm
UGR<19 Ra90
Beam angle: 15°/30°/45°
CCT: 3000K/4000K
Body colour: Black or White
Voltage: 230VAC
Recessed Mounted

Comments:
Length can be customised to suit project requirements. Seamless quick connect system for ease of installation.

5635 & 6533 Series

Combination options:

- Opal diffuser
- Down Lights & Opal diffuser;
- Down Lights;
- Down Lights & 3CCT Track;
- Wall washer;

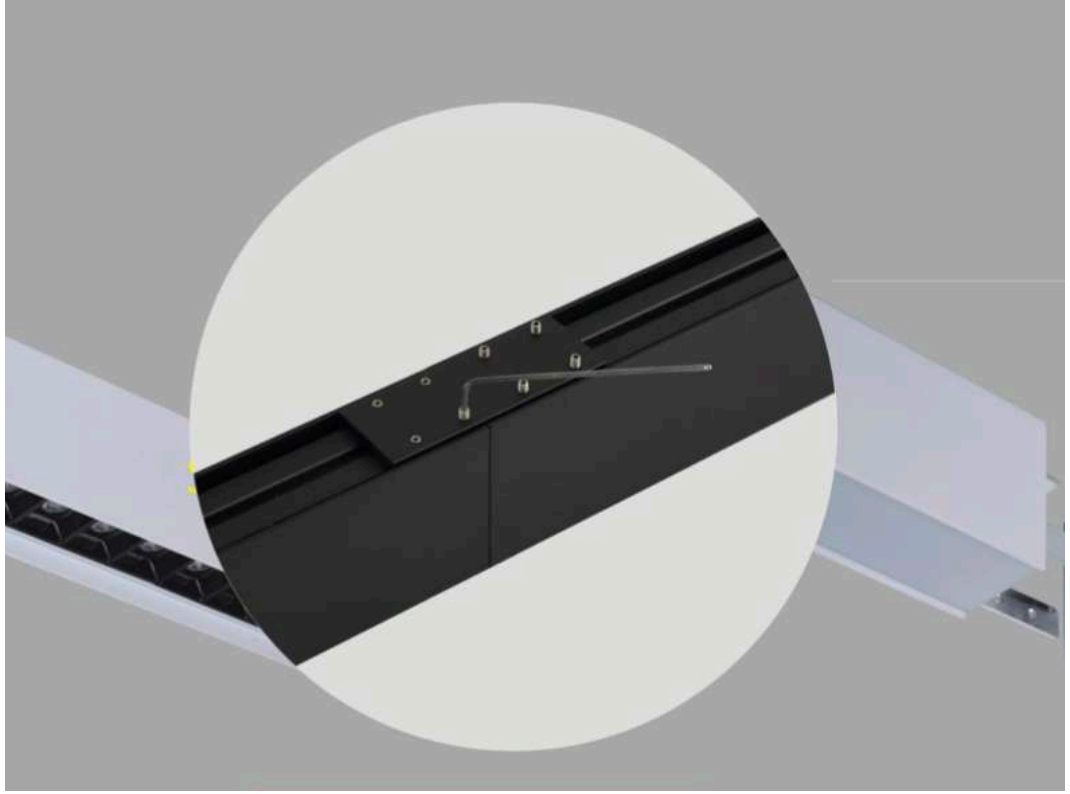

www.comled.com.au