

COMLED

Curvy 22mm Magnetic
Track Lighting system




22 Curvy Magnetic
with 4 wire

Restaurant&
Banquet Hall









DC24V Safe Voltage

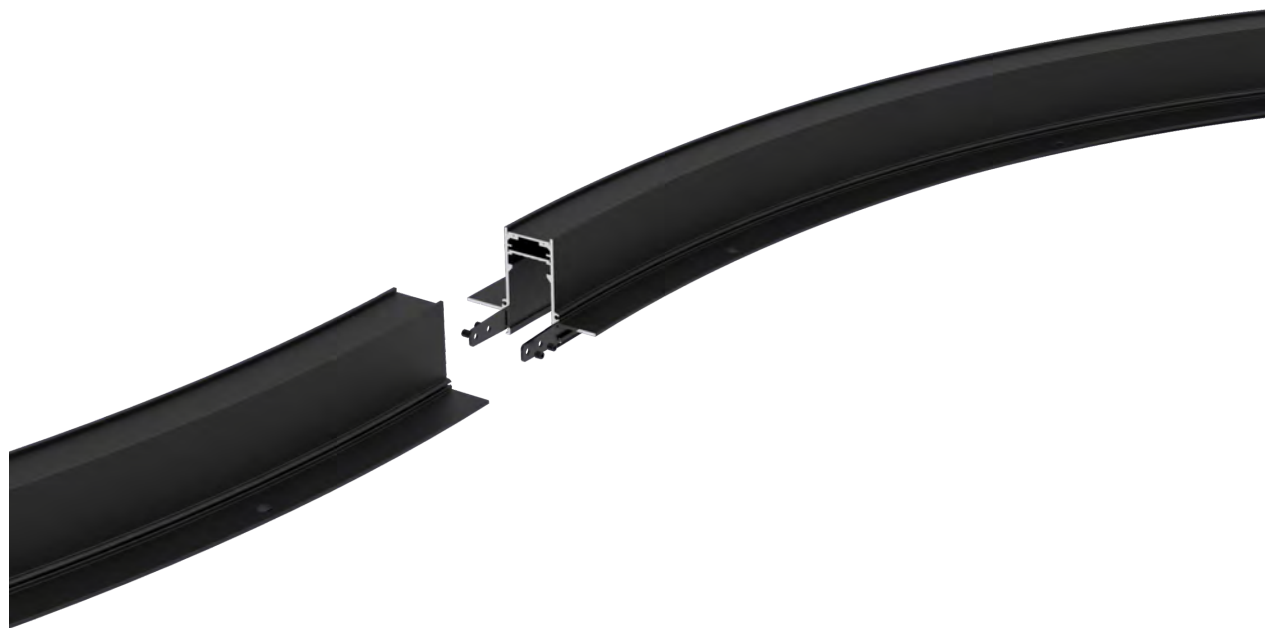





CM-GD22D600Y/L 1/2
Recessed W73*H52* $\varnothing$ 600mm
Single/Mult-Group
6063 Aluminium
Sand, Black or White
Cut hole: Outer D608mm, Inner
D528mm, H65
IP20
Thickness: 9mm




Type







Installation

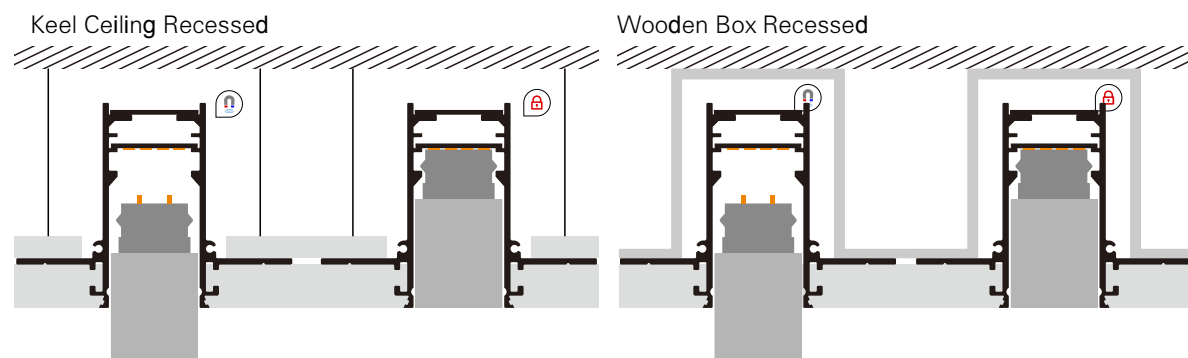



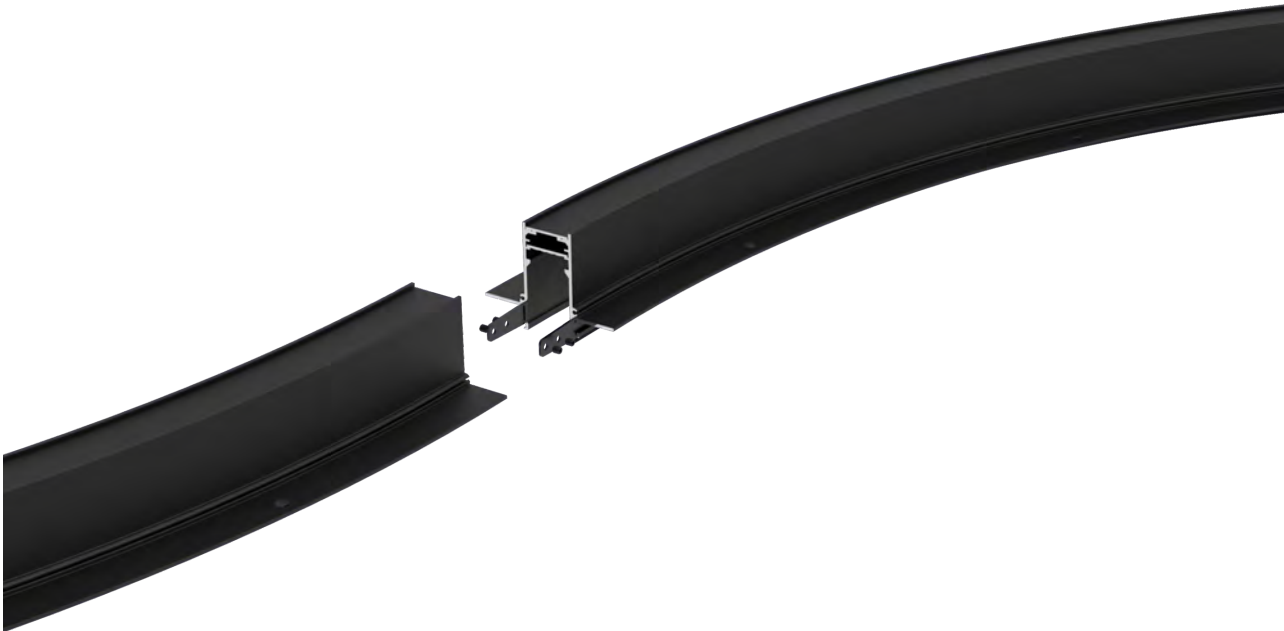

CM-GD22D900Y/L1/2
Recessed W73*H52*Ø 900mm
Single/Multi-Group
6063 Aluminium
Sand, Black or White
Cut hole: Outer D908mm, Inner
D828mm, H65
IP20
Thickness: 9mm

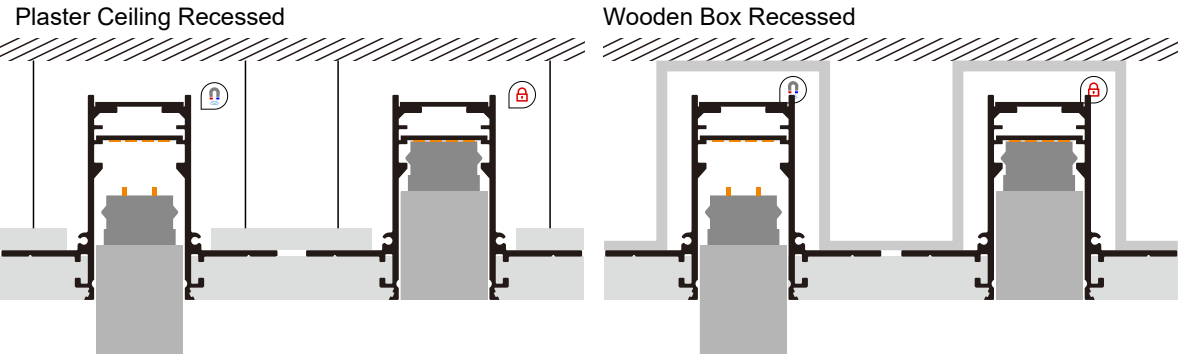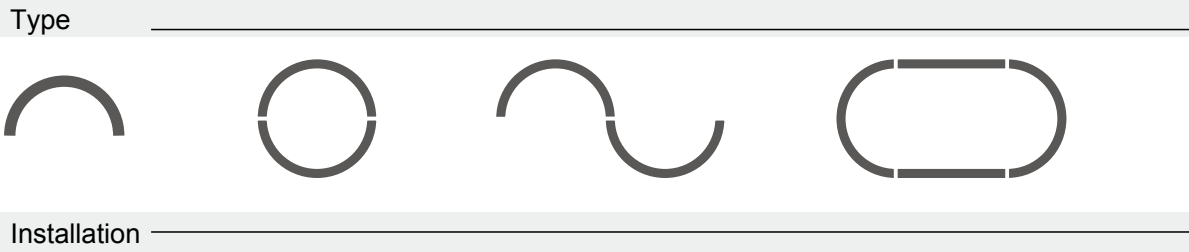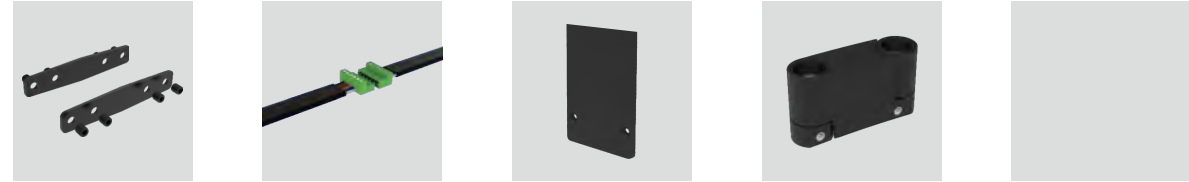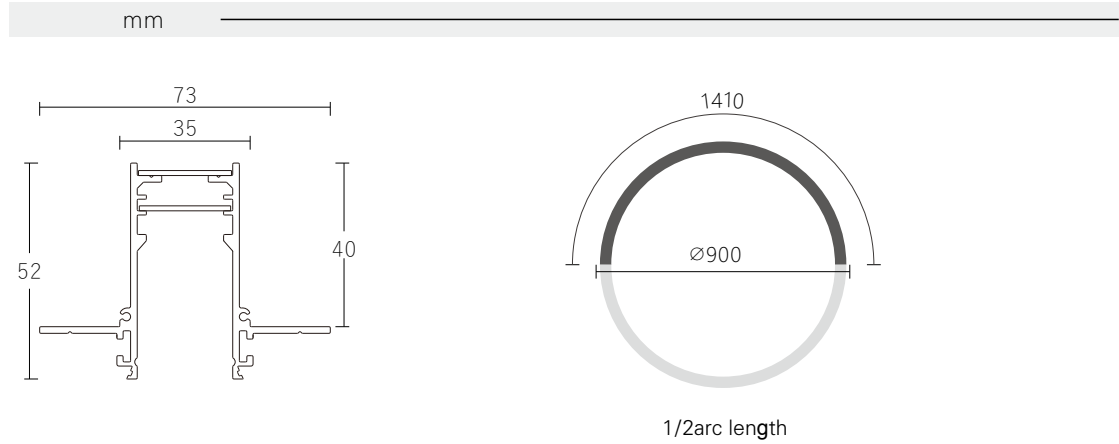





1/4 Round




CM-GD22D1200Y/L1/4
Recessed
W73*H52*Ø1 200mm
Single/Multi-Group
6063 Aluminium
Sand, Black or White
Cut hole: Outer D1208mm, Inner
D1128mm, H65
IP20
Thickness: 9mm

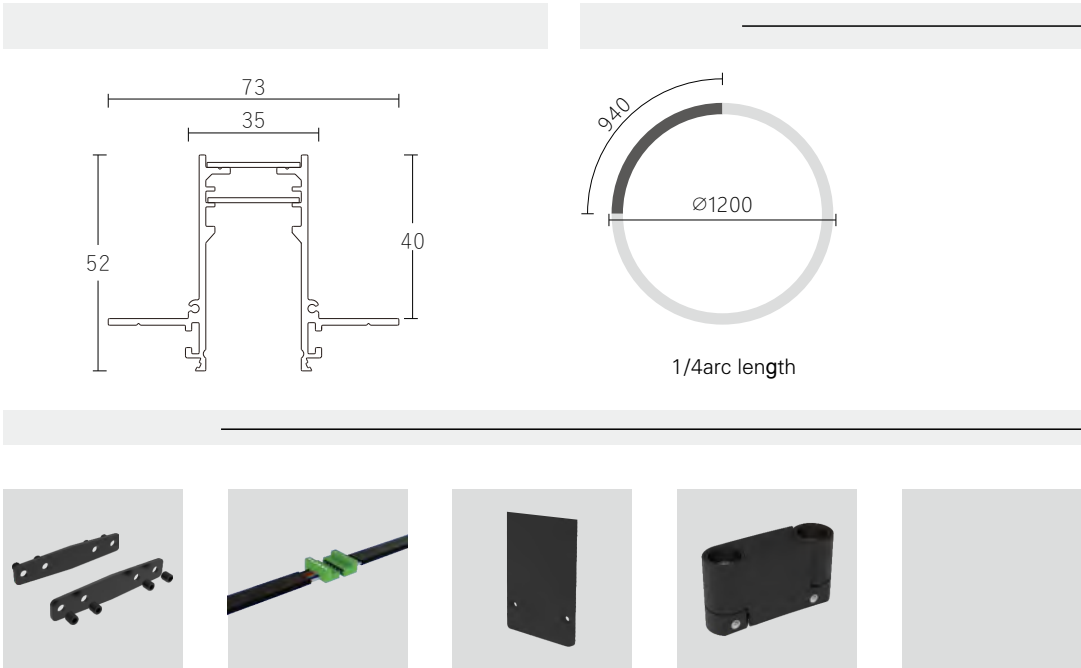

Type

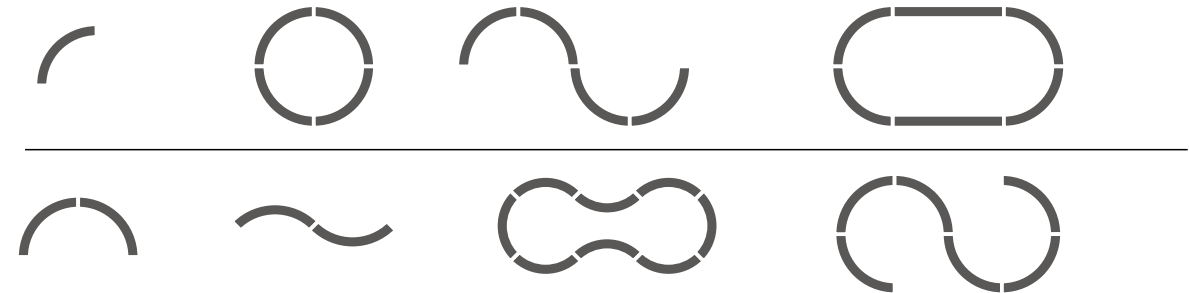





Installation

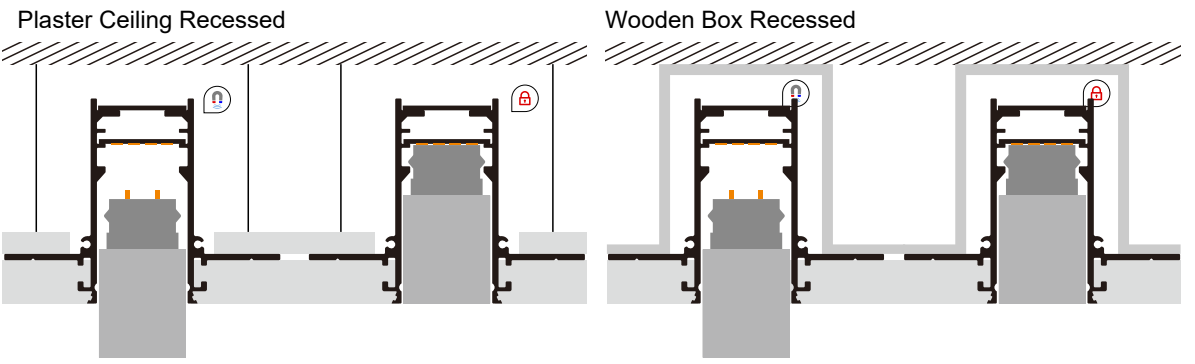



1/4 Round

CM-GD22D1500Y/L1/4
Recessed
W73*H52*Ø1500mm
Single/Multi-Group
6063 Aluminum
Sand BK/WH
Cut hole: Outer D1508mm, Inner
D1428mm, H65
IP20
Thickness: 9mm

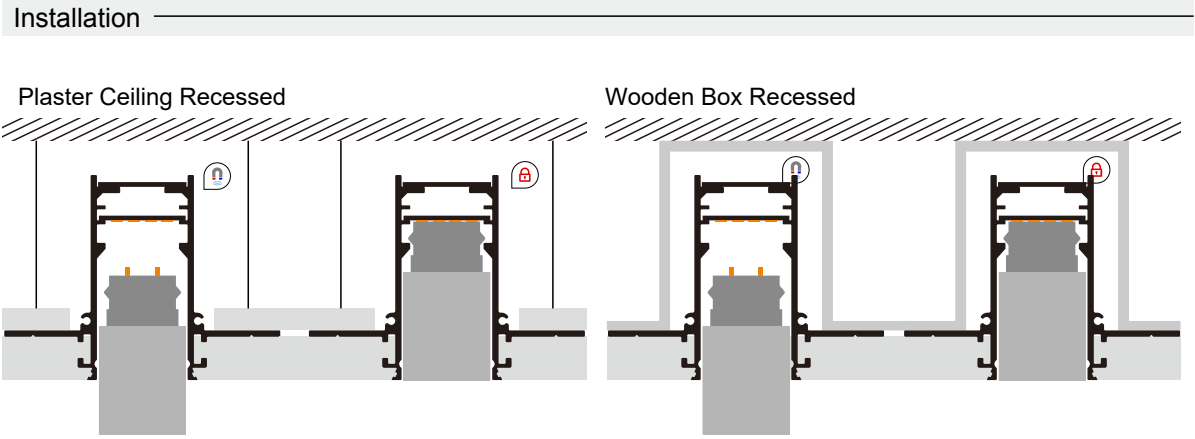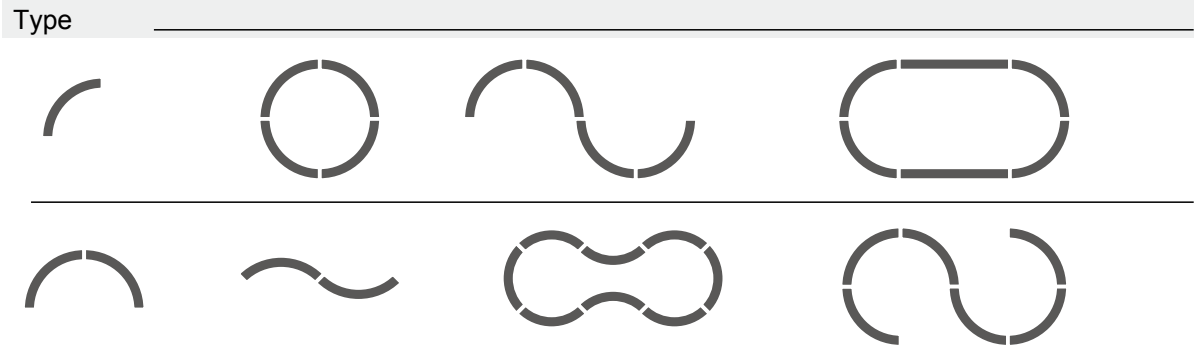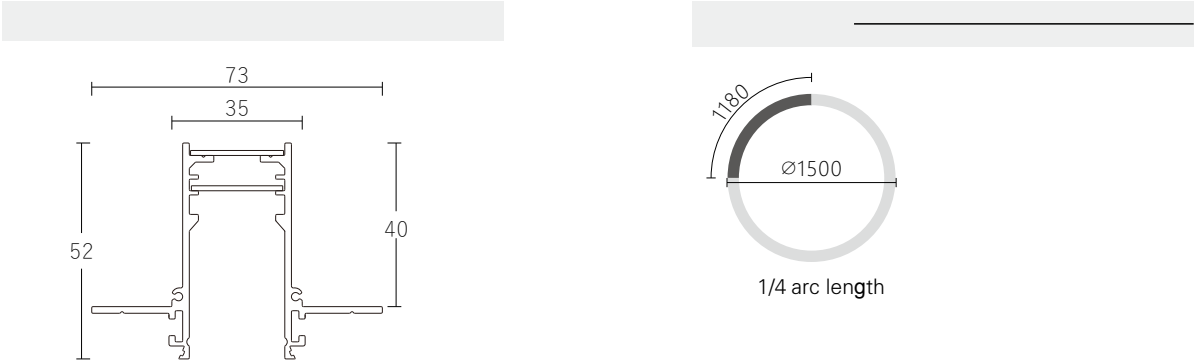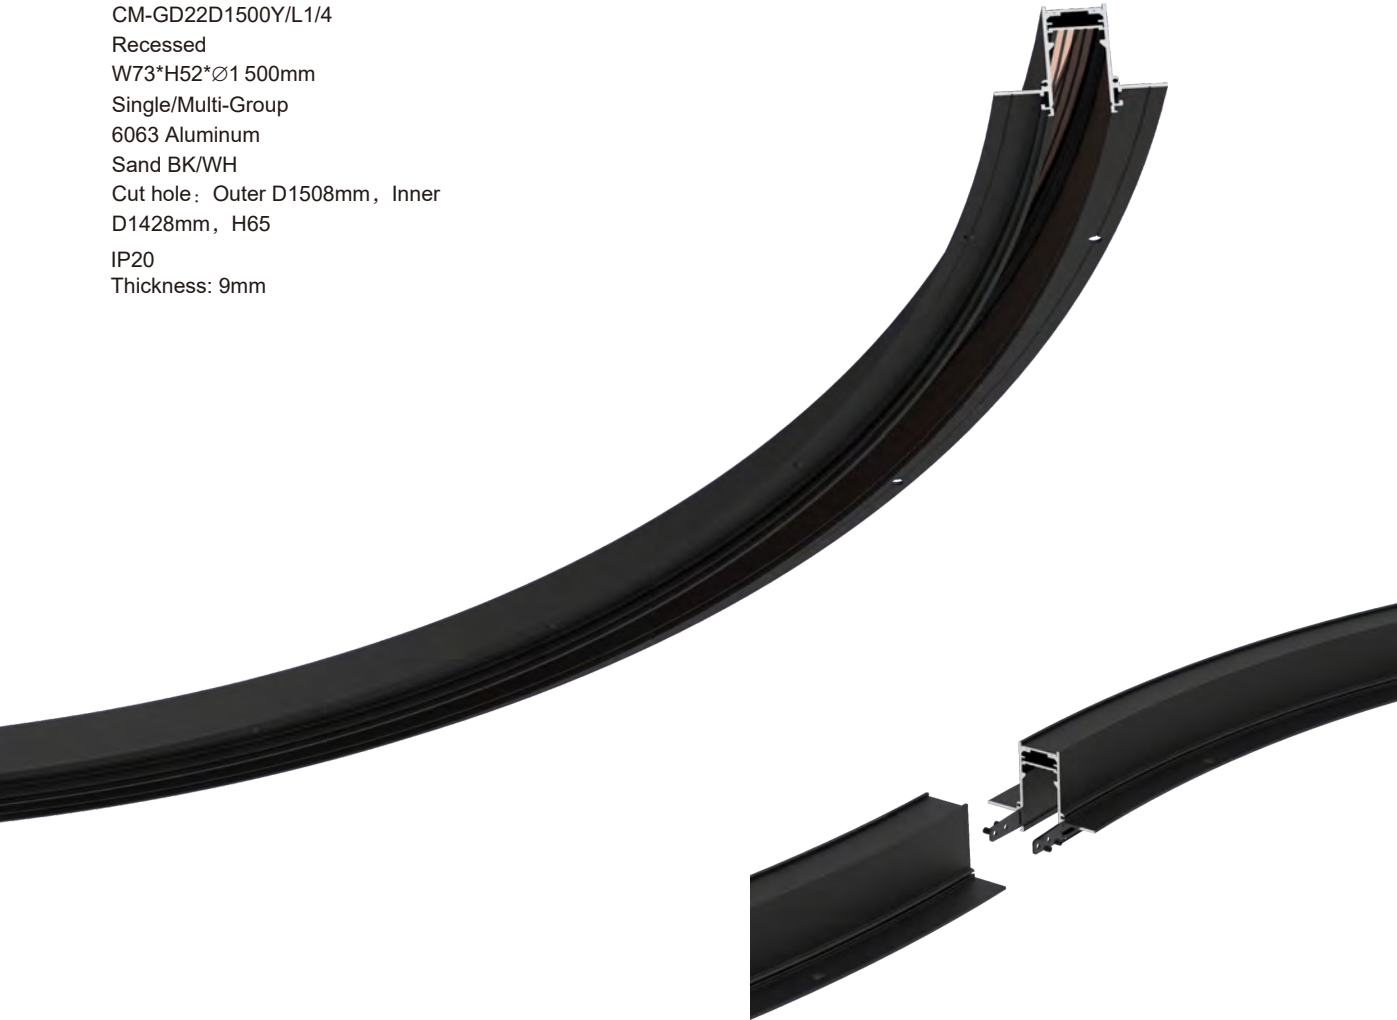





1/4 Round




CM-GD22D1800Y/L1/4
Recessed W73*H52*Ø 1800mm
Single/Multi-Group
6063 Aluminum
Sand Black or White
Cut hole: Outer D1808mm, Inner
D1728mm, H65
IP20
Thickness: 9mm

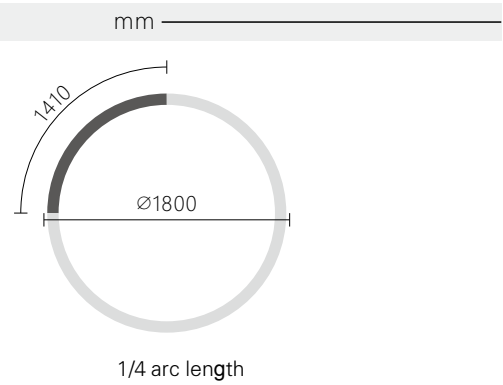

Type

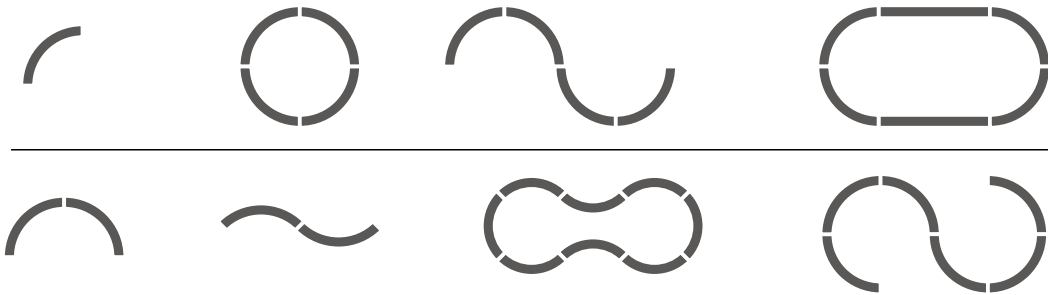



Installation

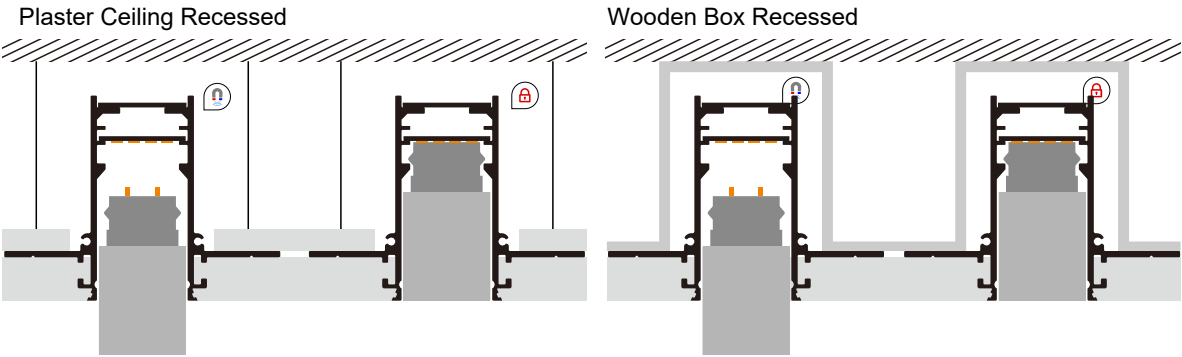








CM-GD7052Y/L1000/H
Recessed
W70*H52mm
L500/1000/2000mm
Single/Multi-Group
6063 Aluminum
Sand, Black or White
Cut hole: W40*H65mm
IP20
Thickness: 9mm

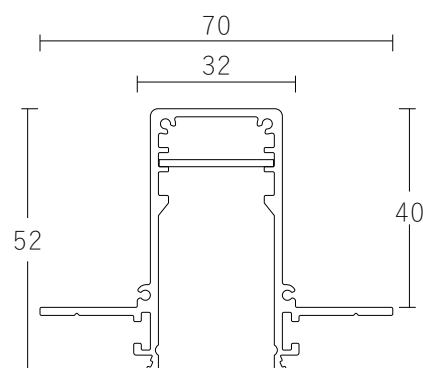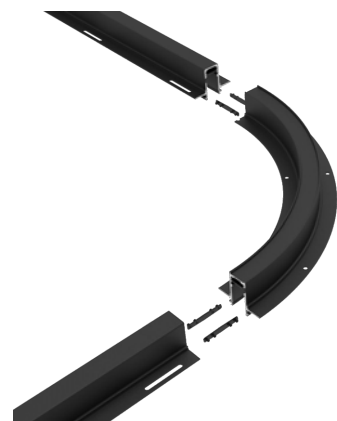

Installation

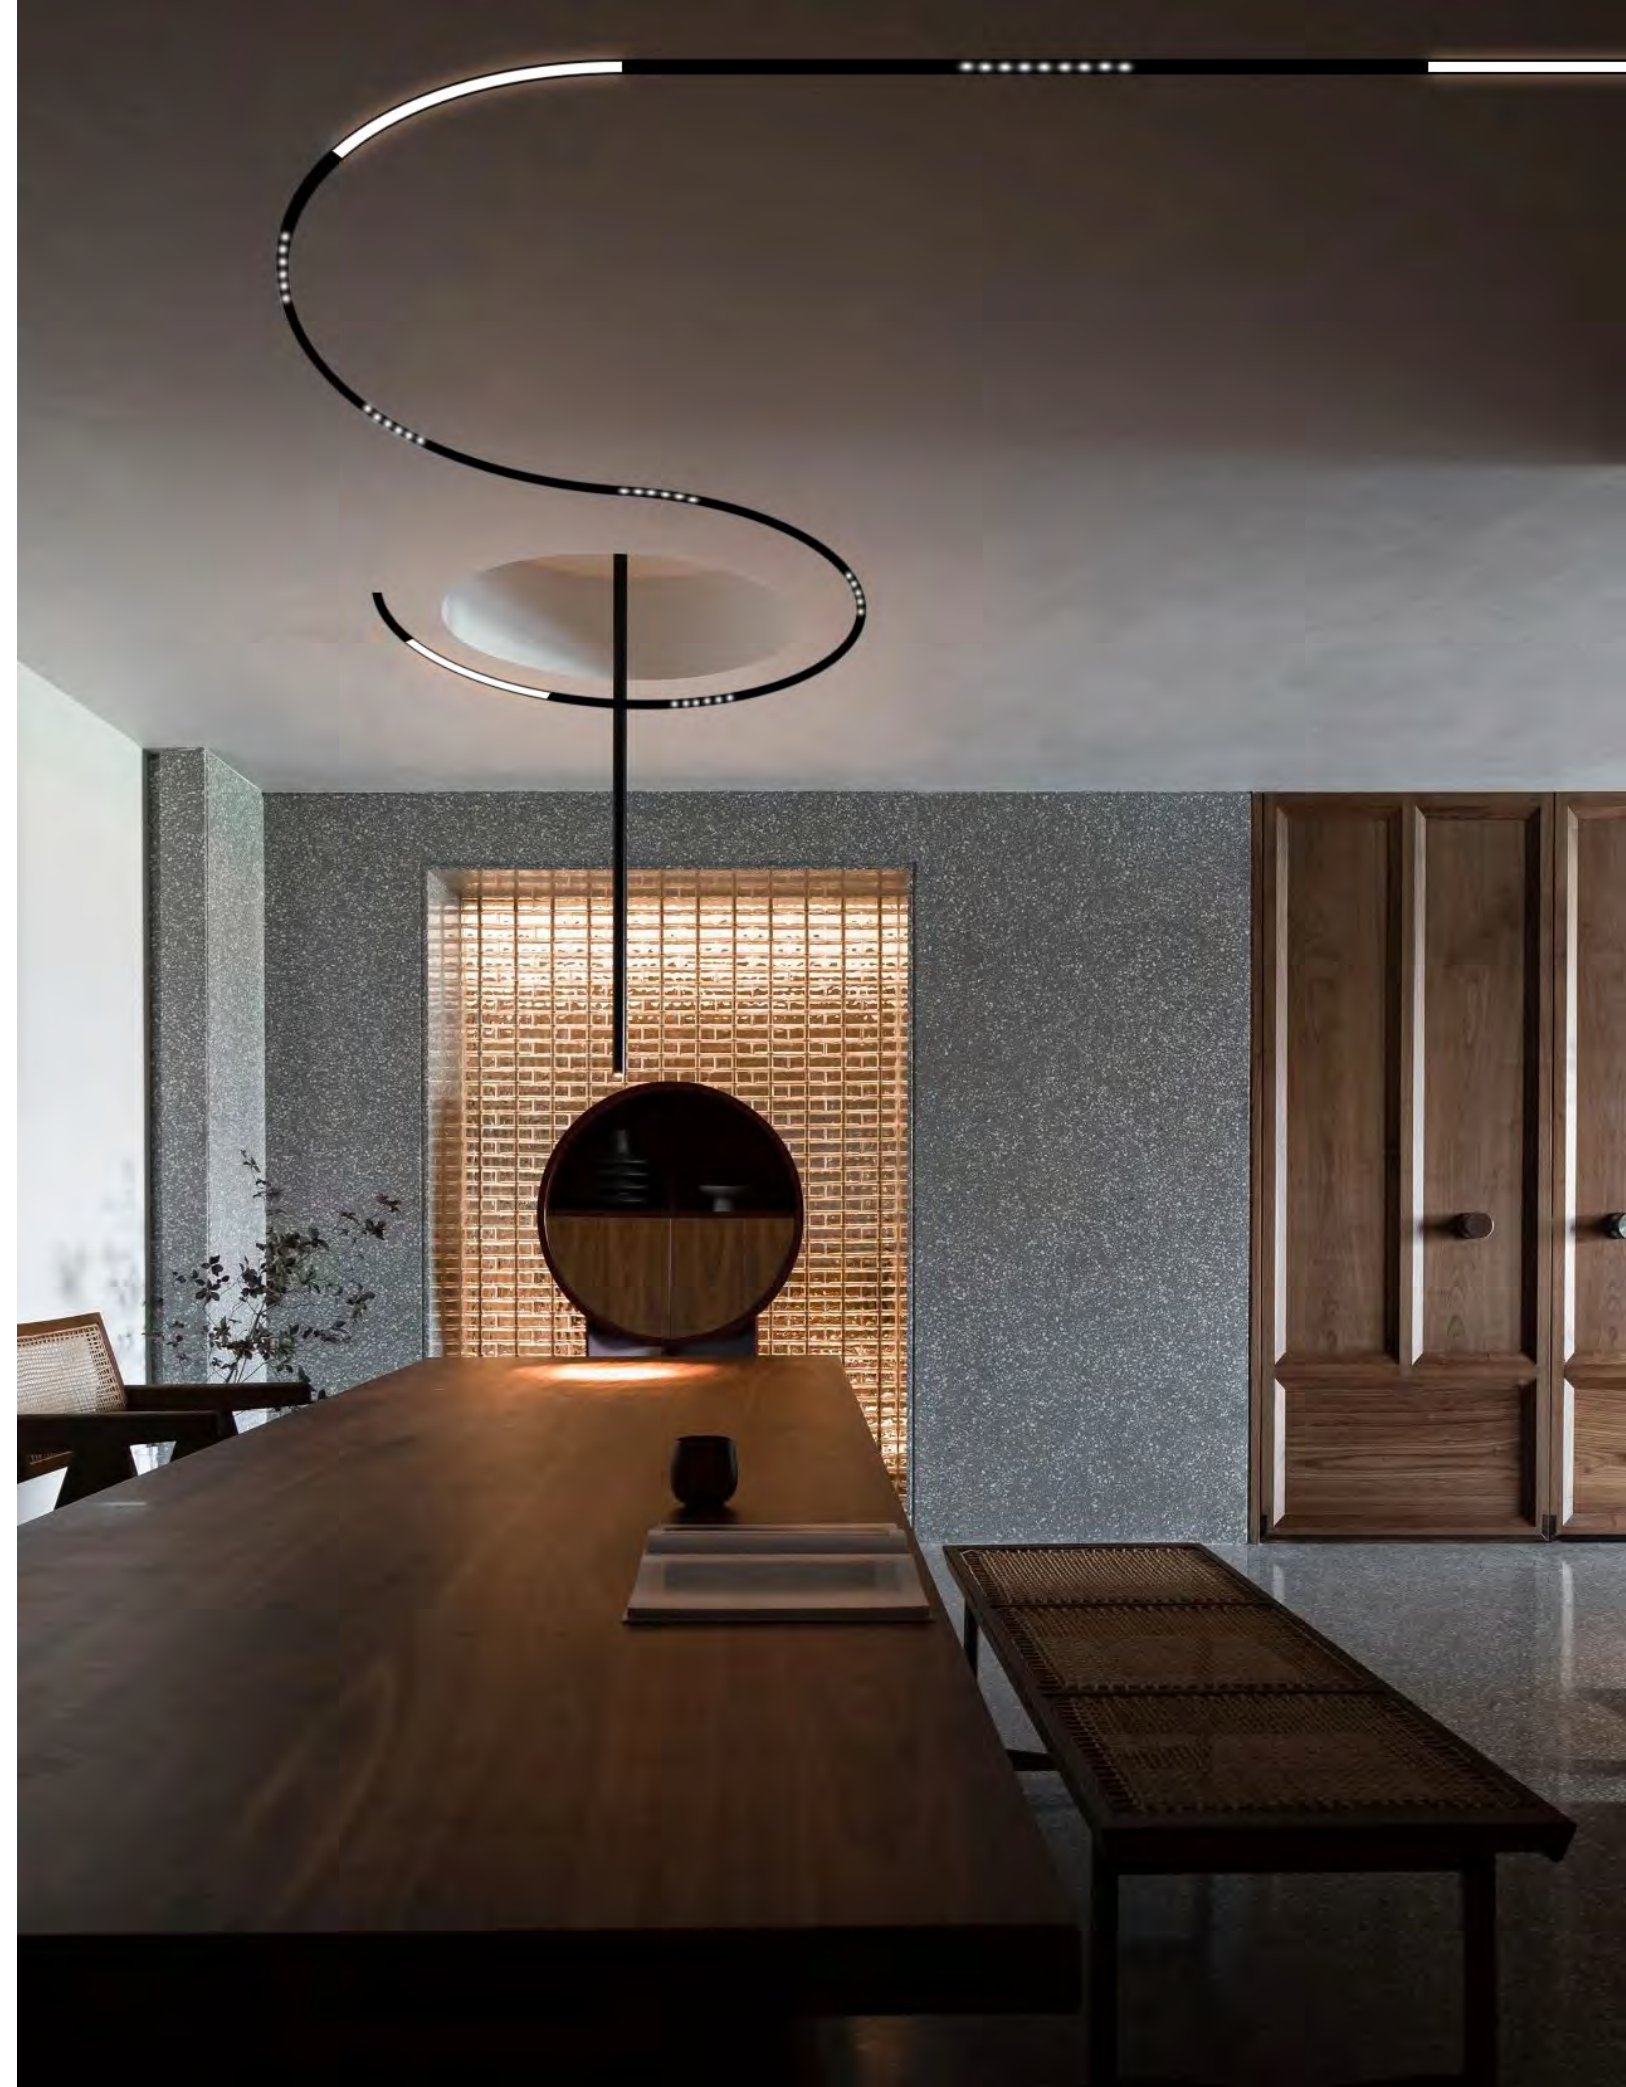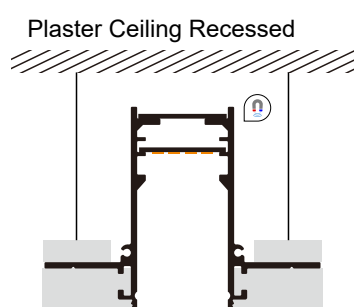



22

Curvy Magnetic
Suspended/Surface ...




Excitement, curves ahead

Arc



Surface
or
Suspension




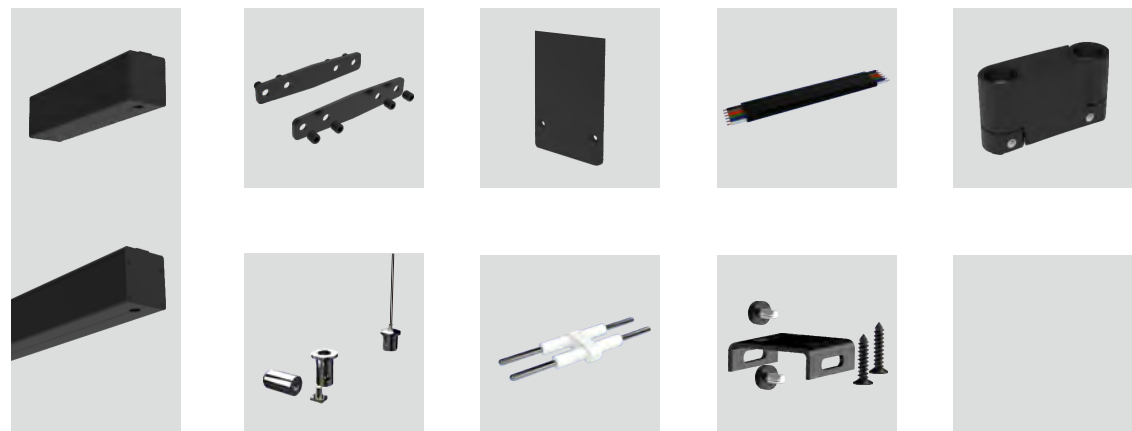


Round

CM-GD22D600D/L1/2
Suspended/Surface
W32*H56*Ø600mm
Single/Mult-Group
6063 Aluminum
Sand BK/WH
IP20

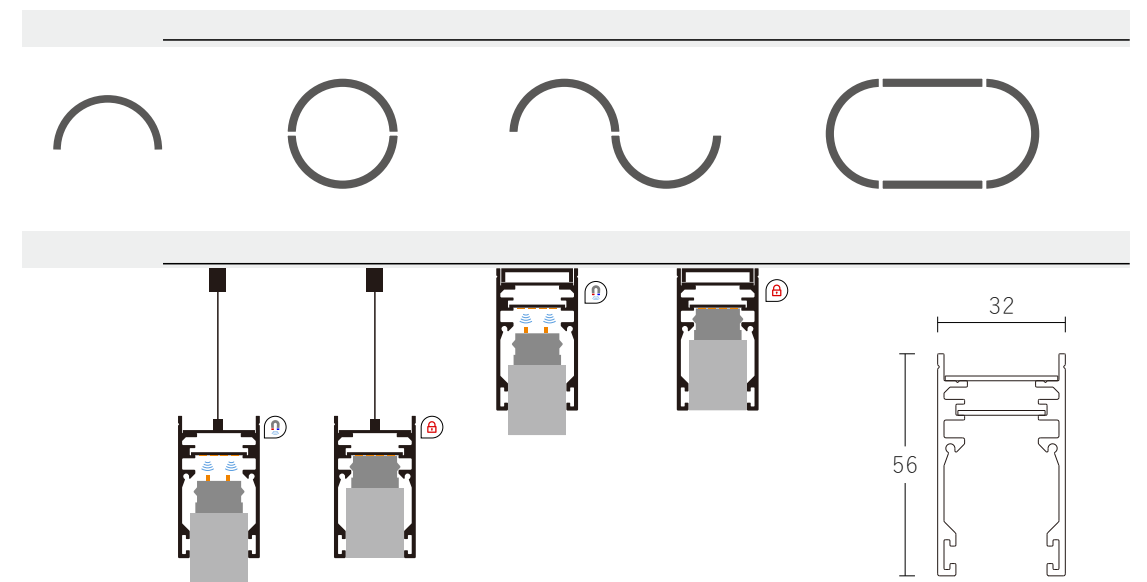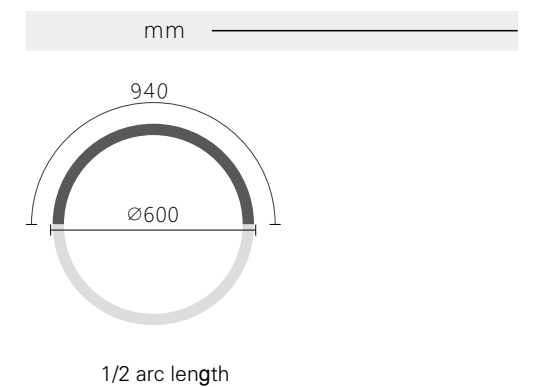

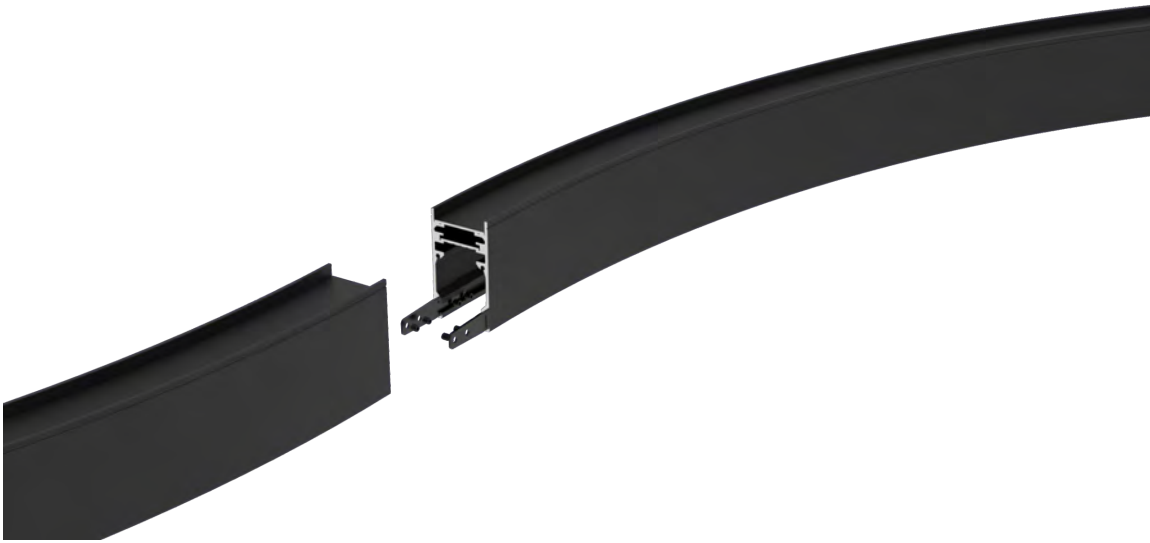


CM-GD22D900D/L1/2
Suspended/Surface
W32*H56*Ø900mm
Single/Multi-Group
6063 Aluminum
Sand, Black or White
IP20

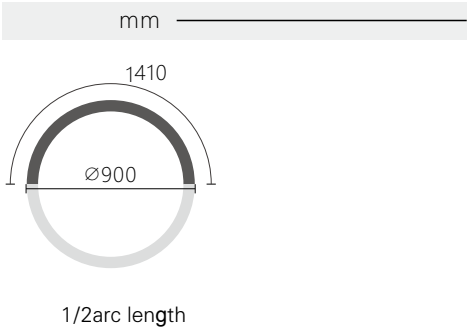


Type





Installation

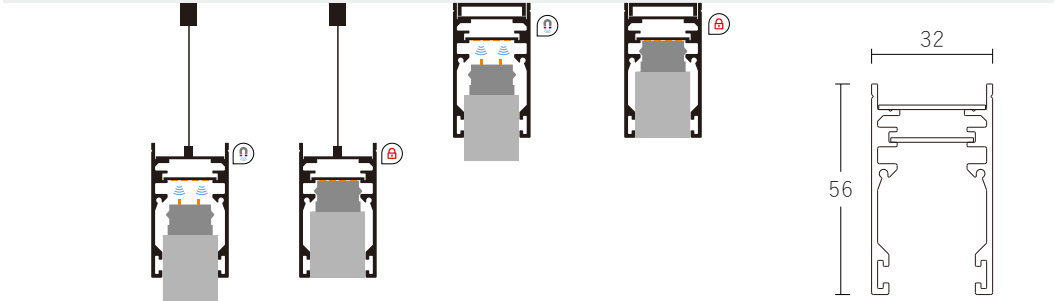


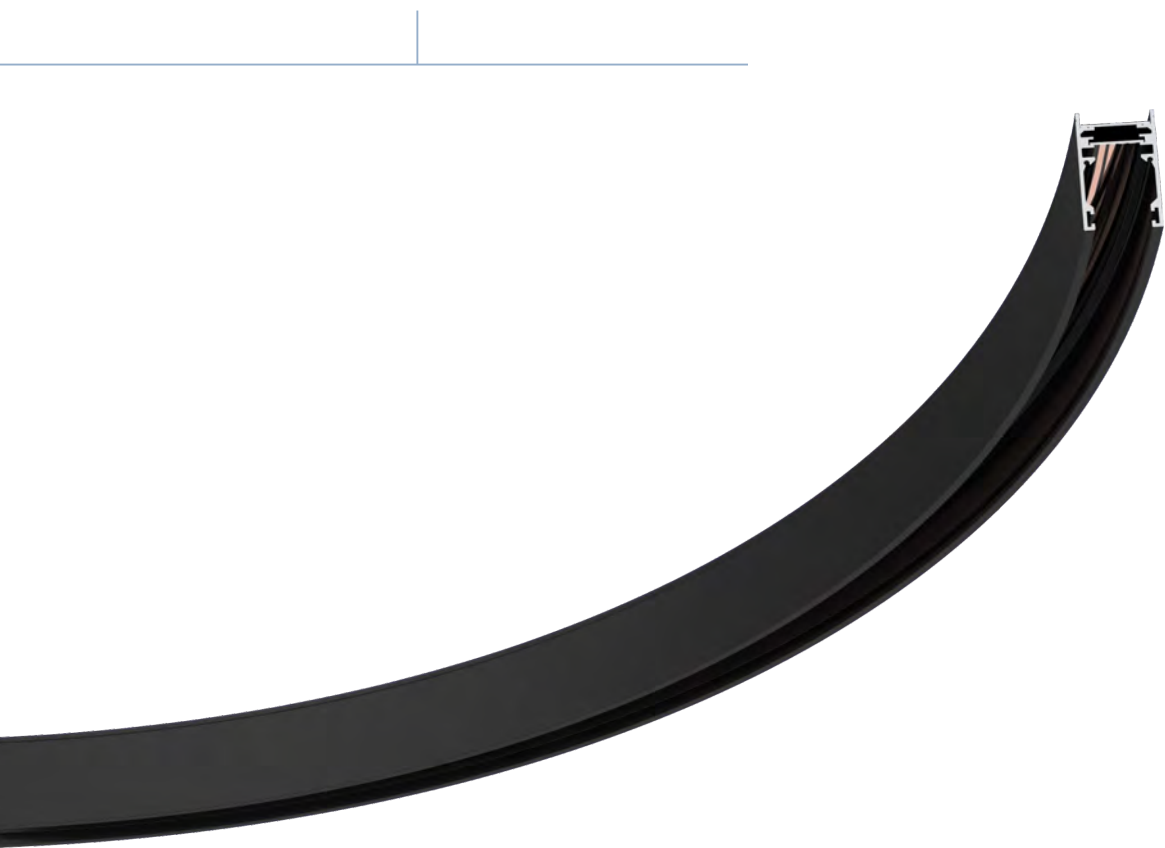



CM-GD22D1200D/L1/4
Suspended/Surface
W32*H56*Ø 1200mm
Single/Multi-Group
6063 Aluminum
Sand, Black or White
IP20

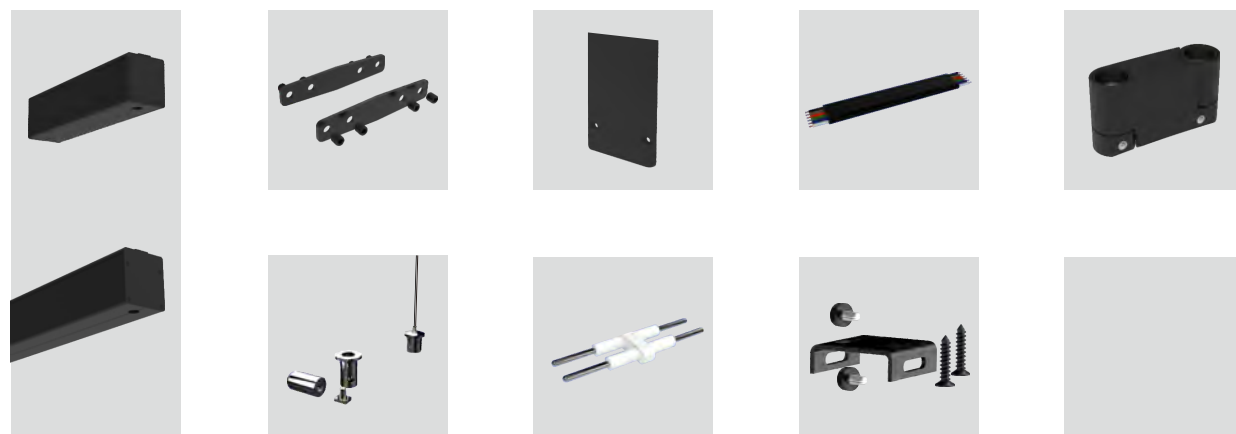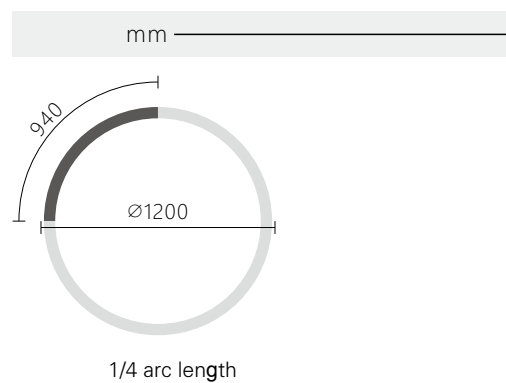


Type





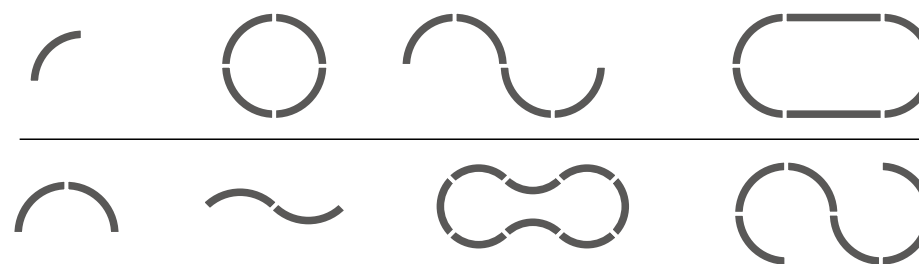


Installation

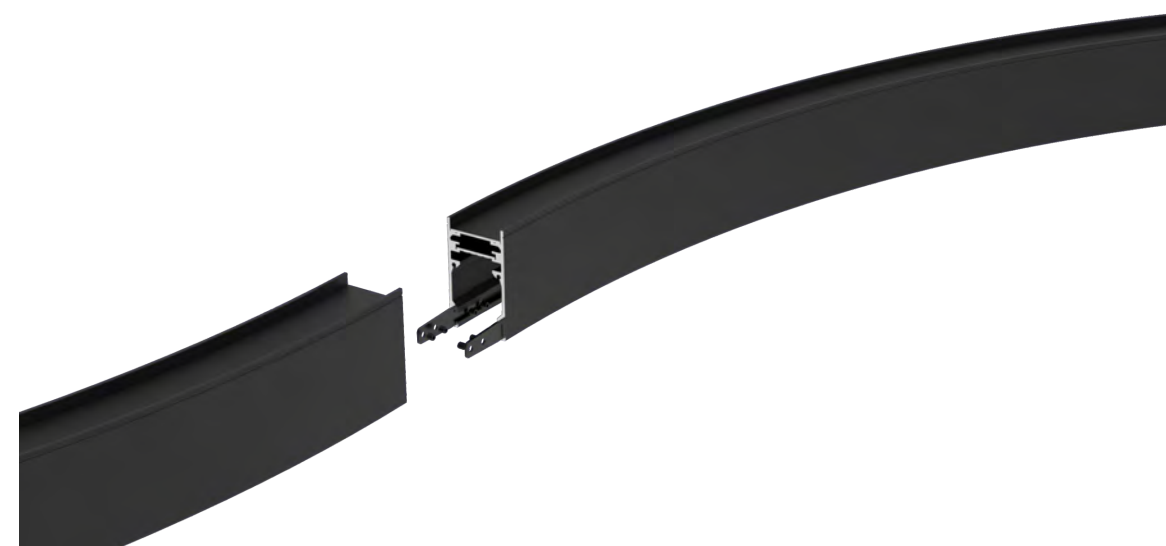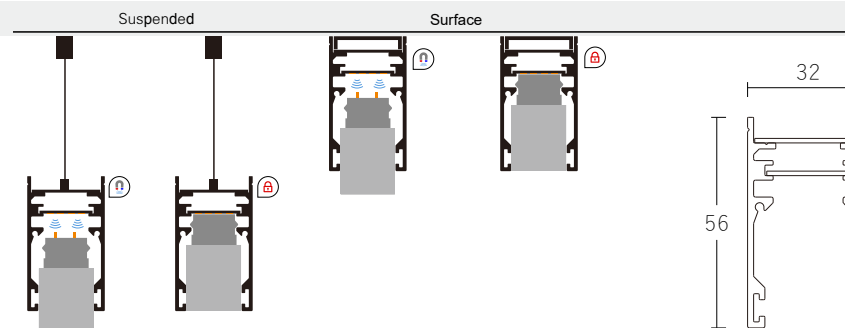




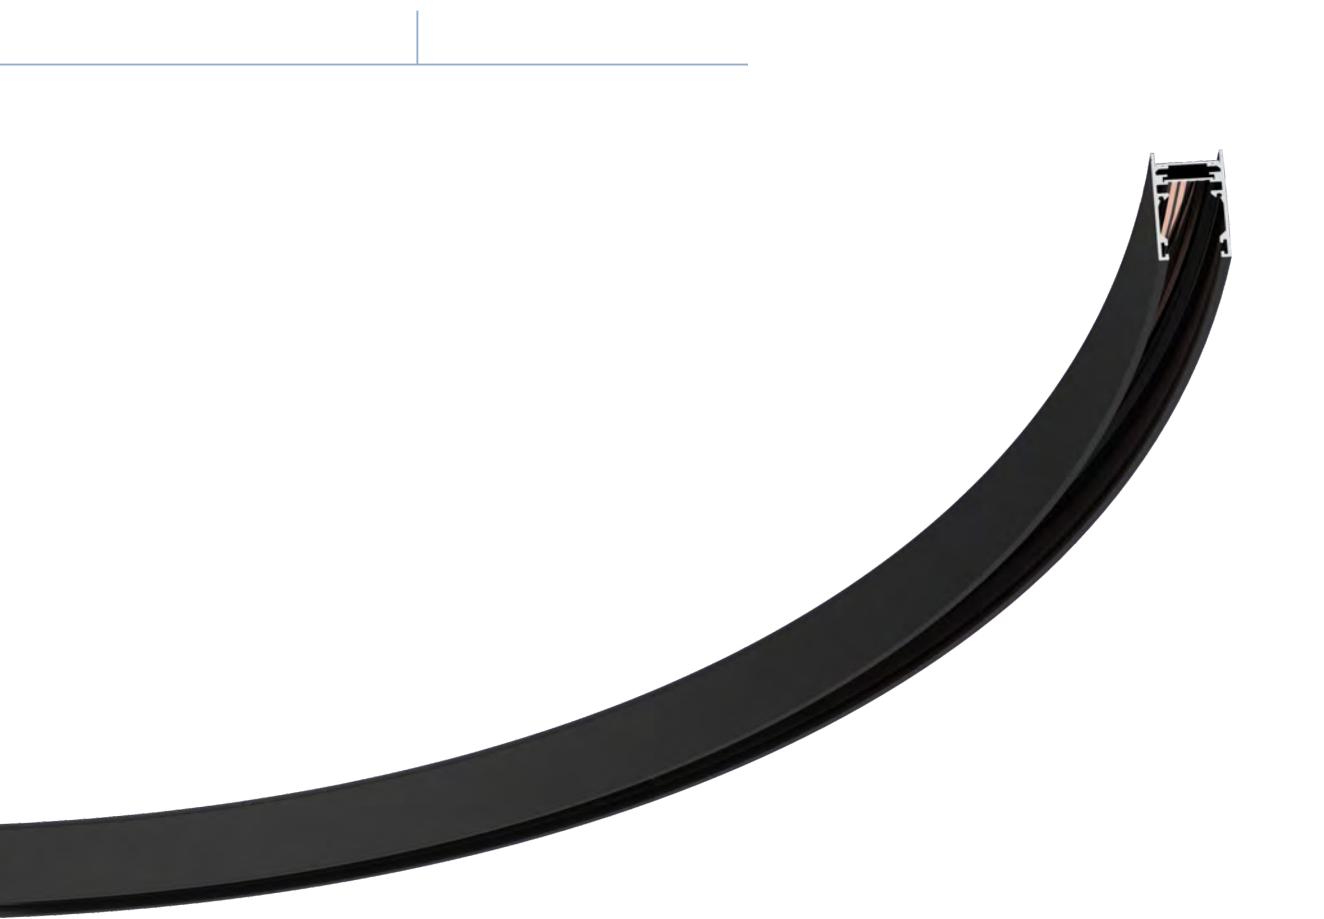





CM-GD22D1500D/L1/4
Suspended/Surface
W32*H56* Ø1 500mm
Single/Multi-Group
6063 Aluminum
Sand, Black or White
IP20

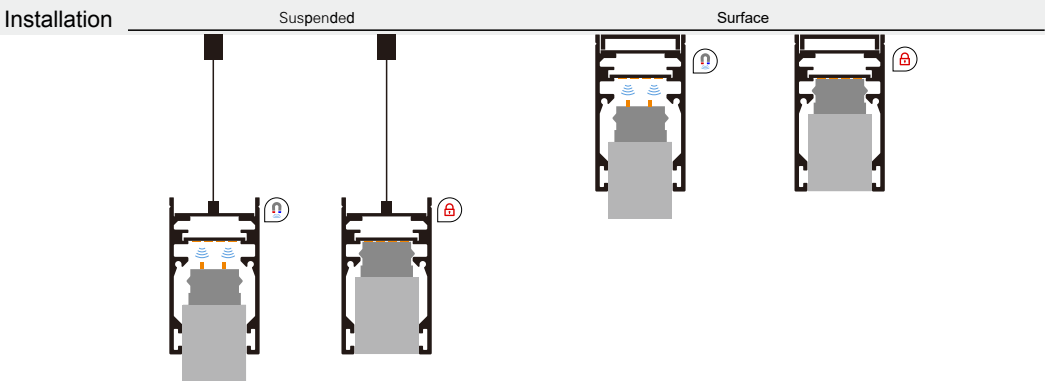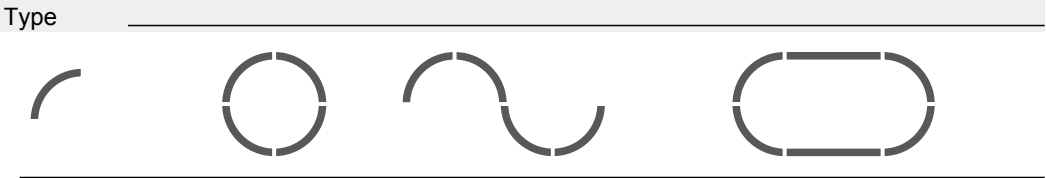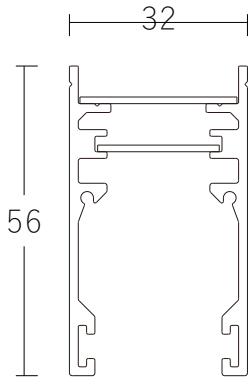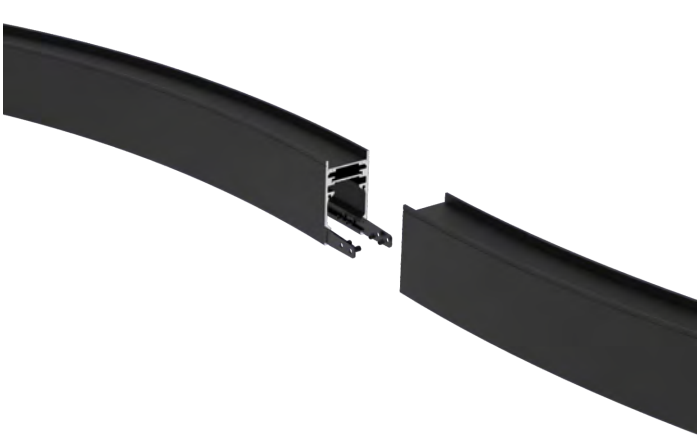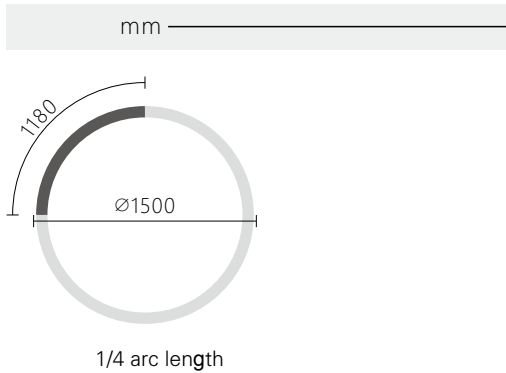



CM-GD22D1800D/L1/4
Suspended/Surface
W32*H56*Ø 1800mm
Single/Multi-Group
6063 Aluminum
Sand, Black or White
IP20

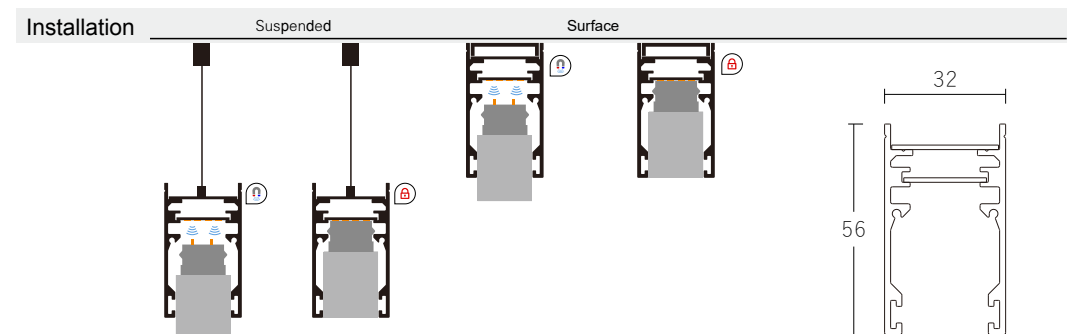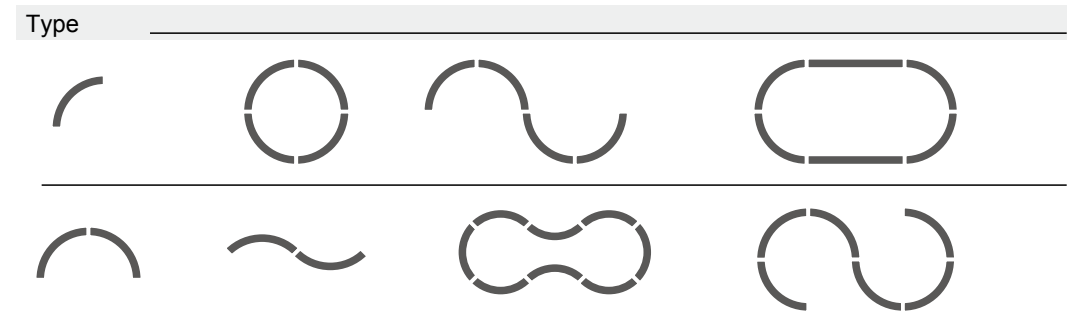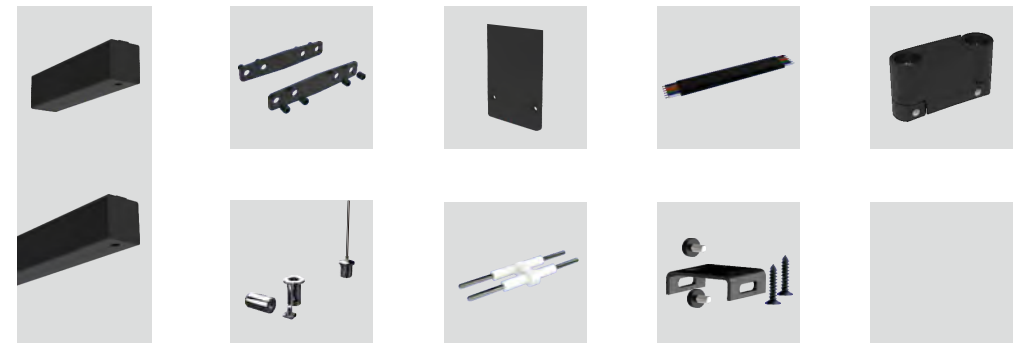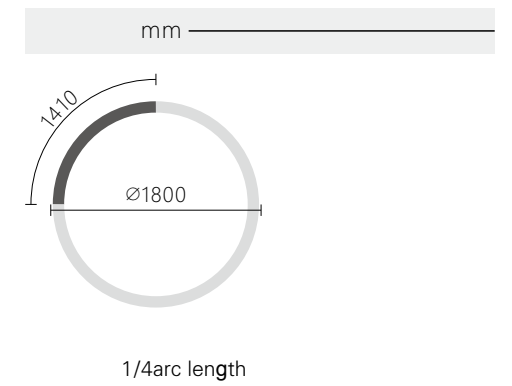

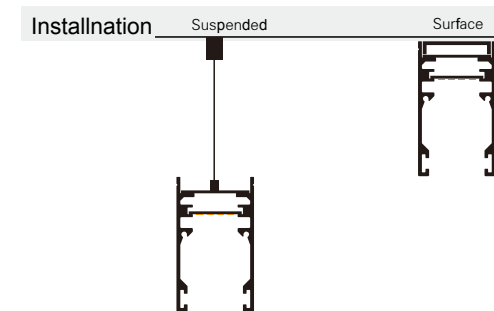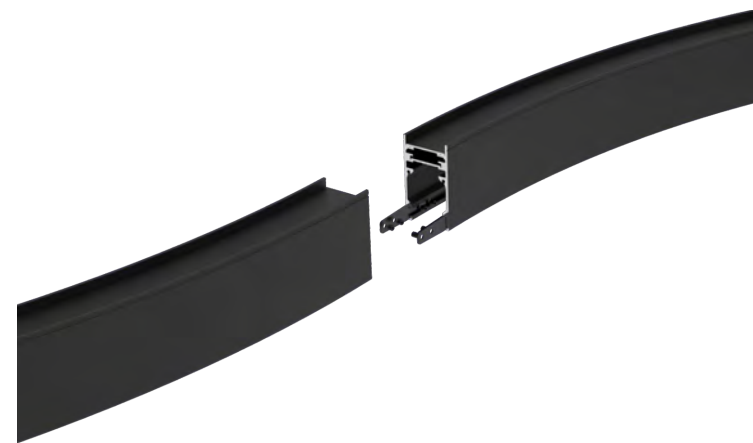


CM-GD3256D/L1000/H
Suspended/Surface
W32*H56mm
*L1000/1500/2000mm
Single/Multi-Group
6063 Aluminum
Sand BK/WH
IP20






Single group control

1 2 3 4

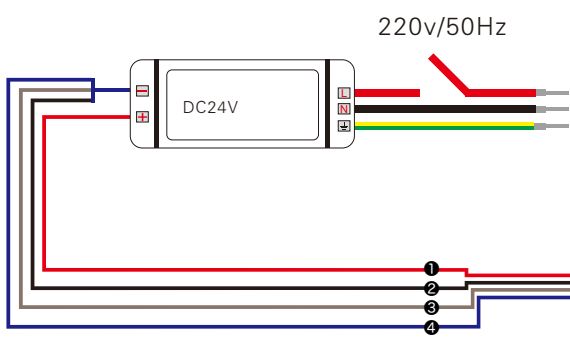

3-Group Control

1 2 3 4



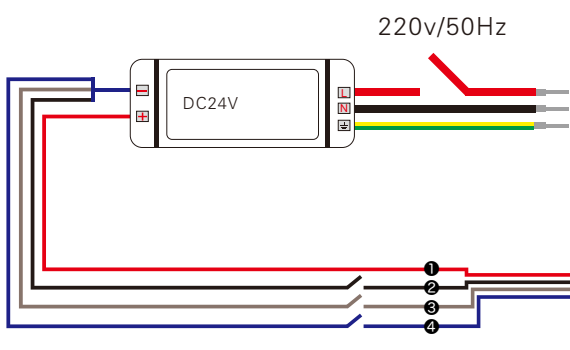


Details.....

- 1. DC24V switching power supply. When matching the power supply, the total power of the switching power supply must be more than 20% greater than the power of the illuminator. For example, a group of lines with 5 lights, each with a power of 12W and a total power of 60W, then The total power should be equipped with a switching power supply of more than 75W. 2. In order to minimize the voltage drop, the installation length of the lamp track should not exceed 5 meters. 5 meters are used for a group of separate power supply. If necessary, it is recommended that 3 meters be used for a group. Separate line for power supply.





DC24V Safe Voltage

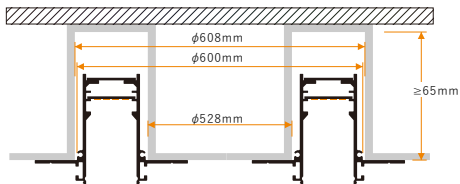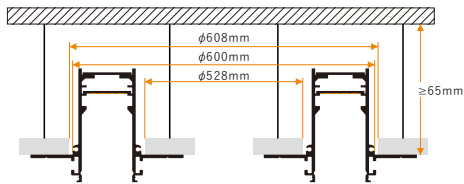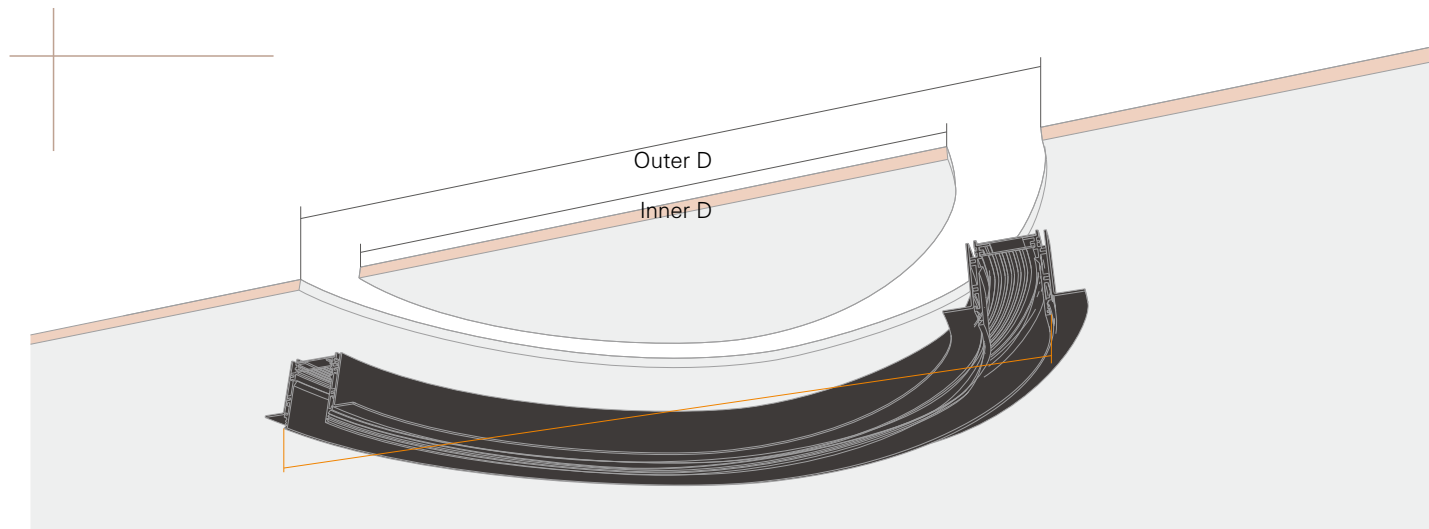



CM-GD22D600Y/L1/2
W73*H52mm

Cut hole: Outer D608mm,
Inner D528mm开孔H:
≥65mm

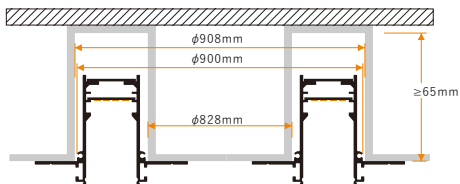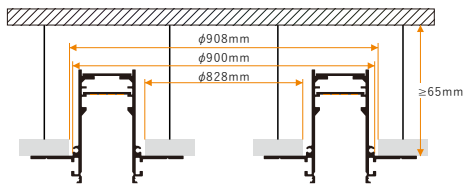



CM-GD22D900Y/L1/2
W73*H52mm

Cut hole: Outer D908mm,
Inner D828mm开孔H:
≥65mm

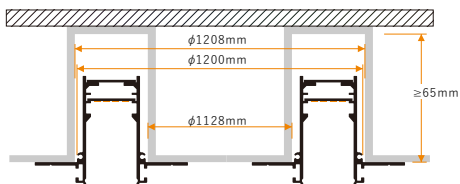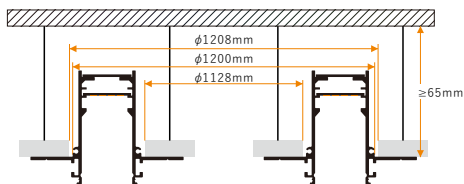



CM-GD22D1200Y/L1/4
W73*H52mm

Cut hole: Outer D1208mm,
Inner D1128mm开孔H:
≥65mm

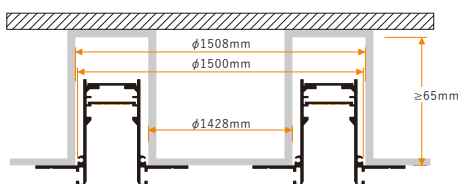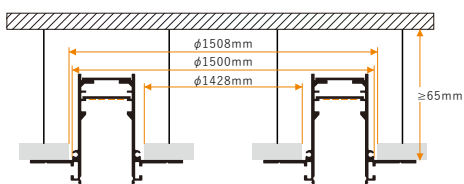



CM-GD22D1500Y/L1/4
W73*H52mm



Cut hole: Outer D1508mm,
Inner D1428mm开孔H:
≥65mm

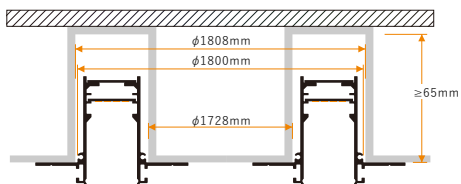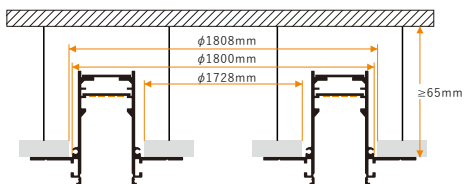


CM-GD22D1800Y/L1/4
W73*H52mm

Cut hole: Outer D1808mm,
Inner D1728mm
Cut hole H: ≥65mm

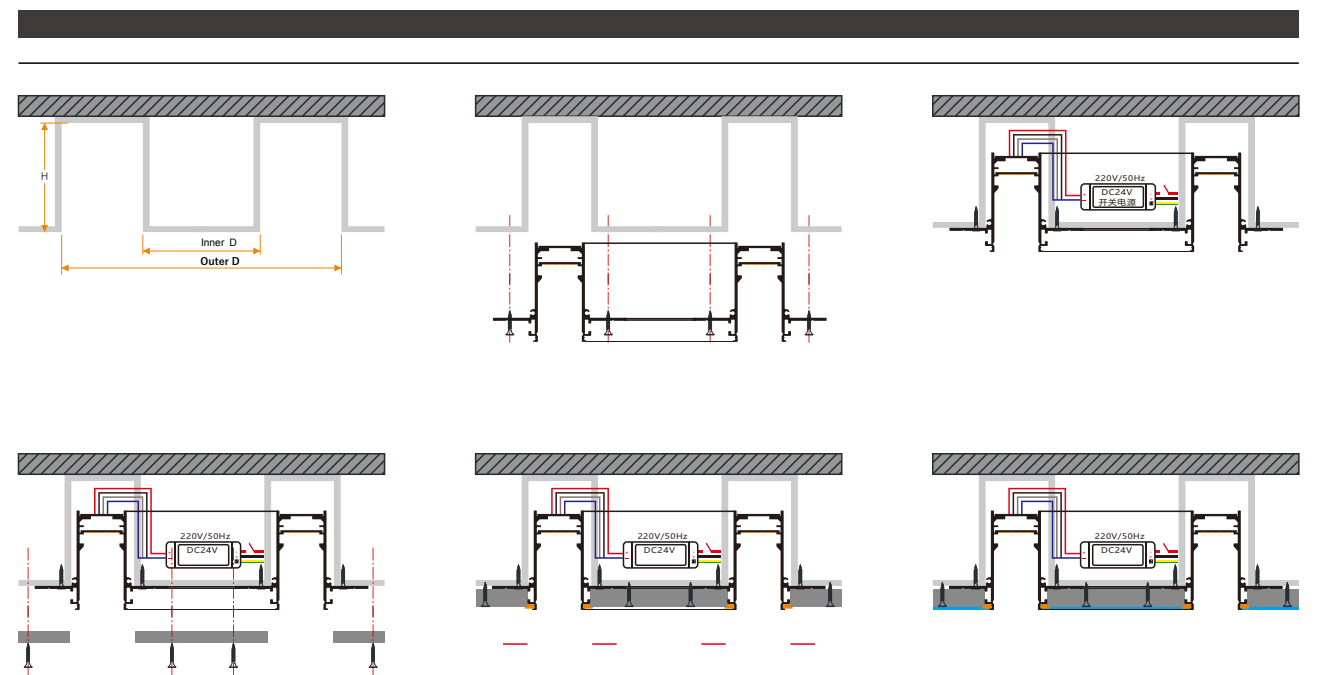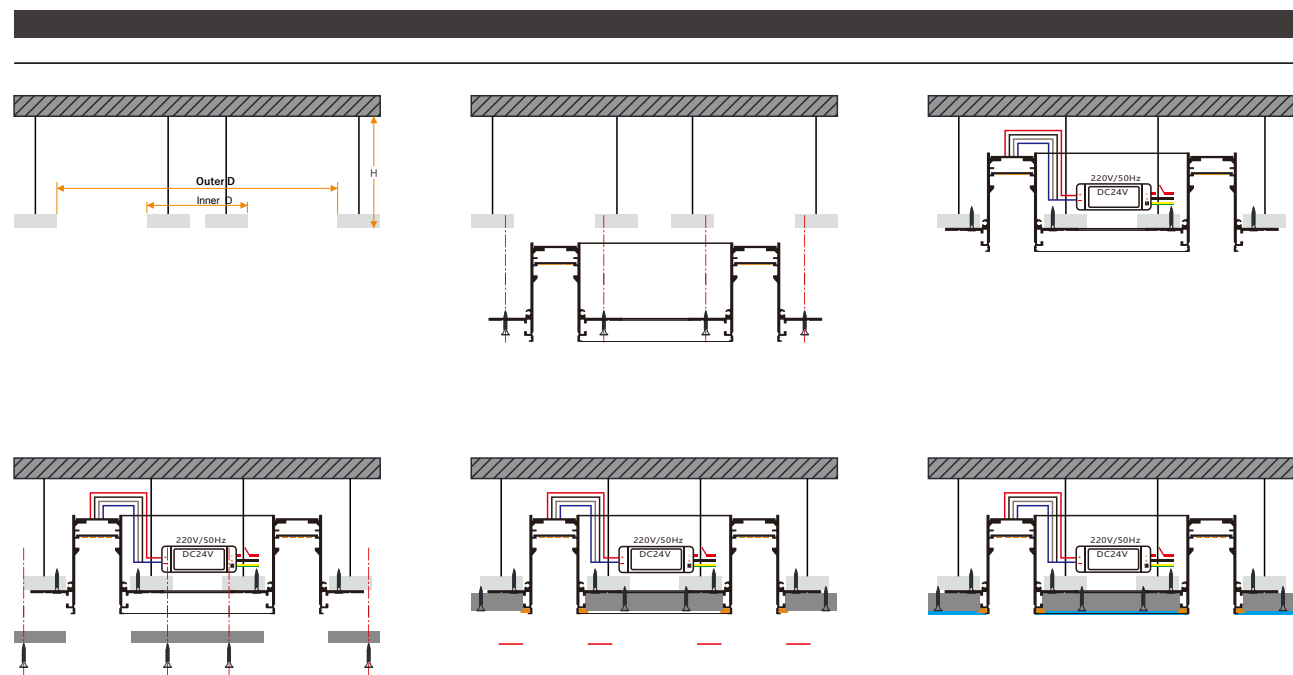


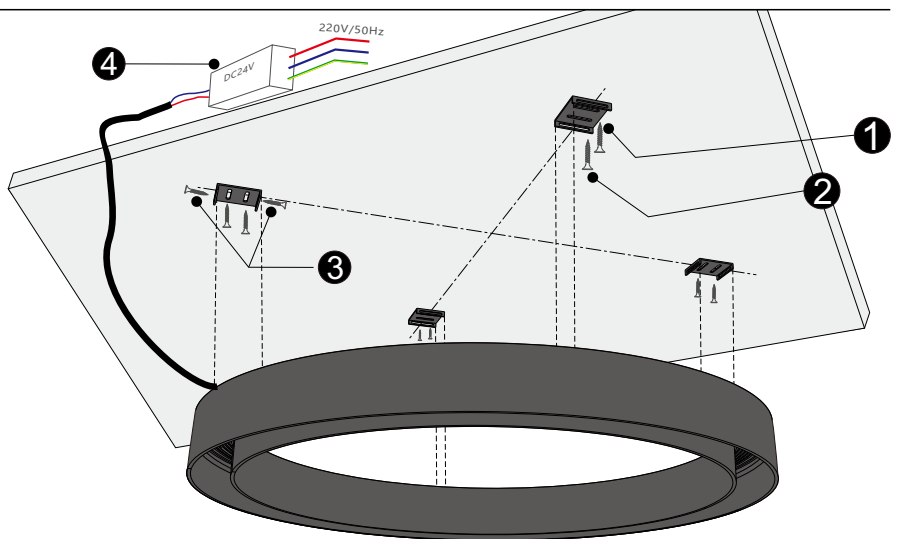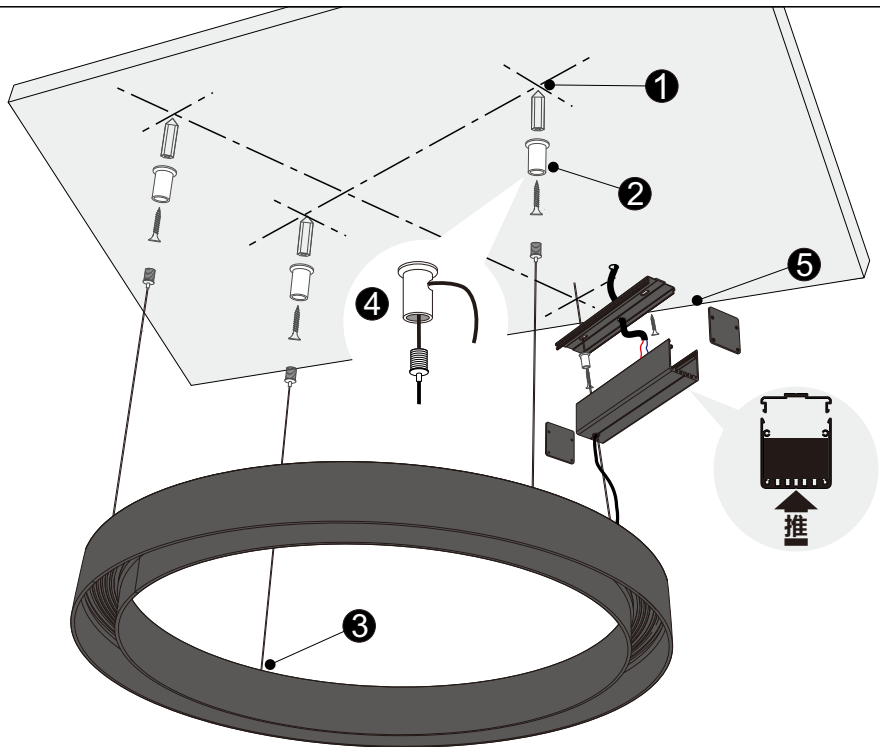

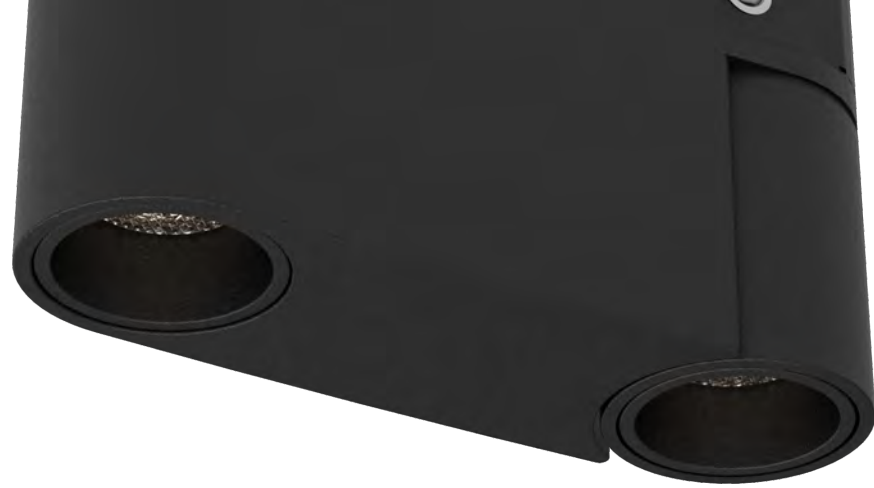

Magnetic R&D

Track lighting design

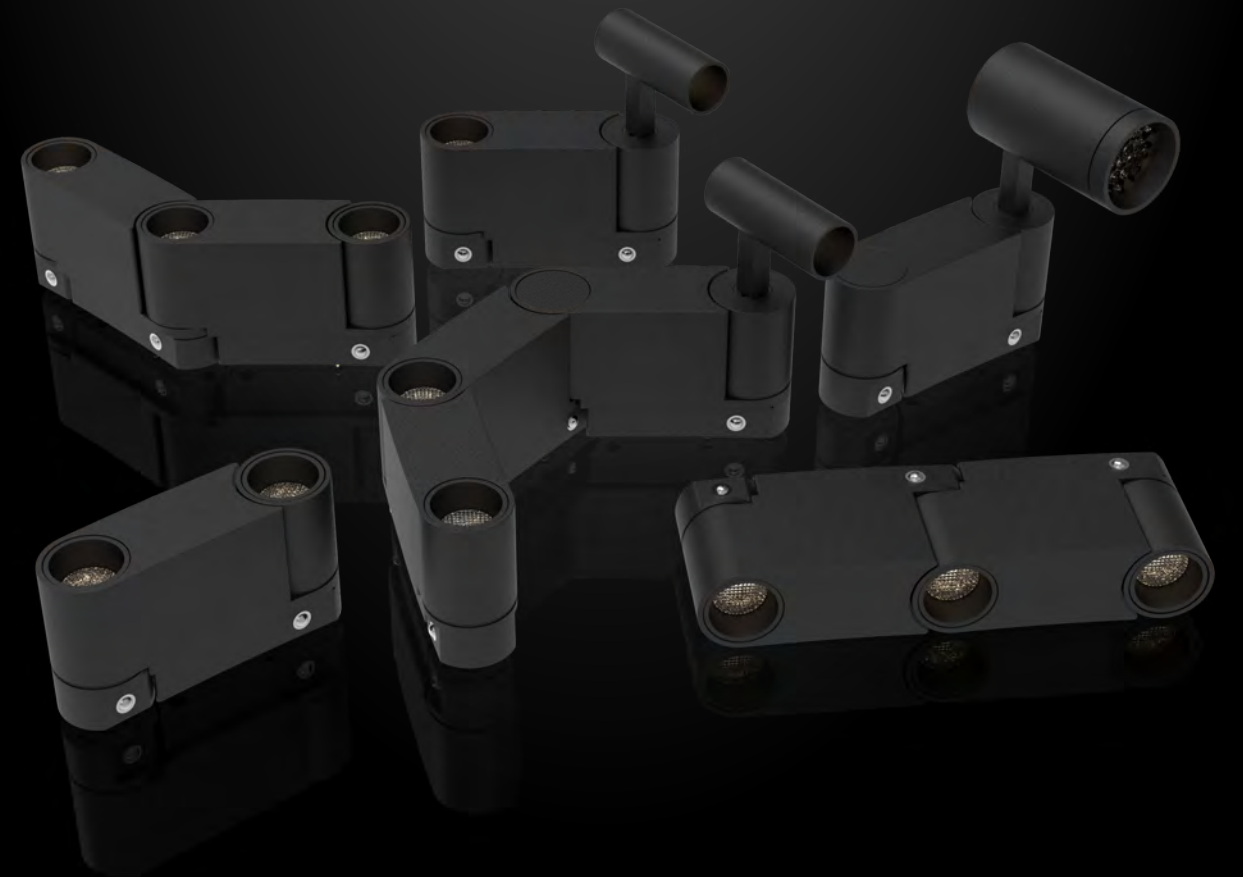

22 Curvy Magnetic Lamps.....



CM-GSD2240H/
L73/2W



CM-ZHD2240H/
L73/2W



CM-SD2265H/
3W



CM-SD223463H/ 5W



CM-DXD226068H/ 5W



CM-GSD2240H/
L124/3W



CM-GSD2240H/
L175/4W



CM-GSD2240H/
L226/5W



CM-GSD2240H/
L277/6W



CM-PMD2240H/
L340/3W



CM-PMD2240H/
L518/5W





CM-PMD2240H/
L730/7W







CM-GSD2240H/L73/2W
W22*H40*L73mm
6063 Aluminium
Sand, Black or White
IP20
Non DIM LEDs: Osram
Voltage: DC24V
Wattage: 2W (2x1W)
2700K/3000K/4000K
CRI:≥90
15°/24°

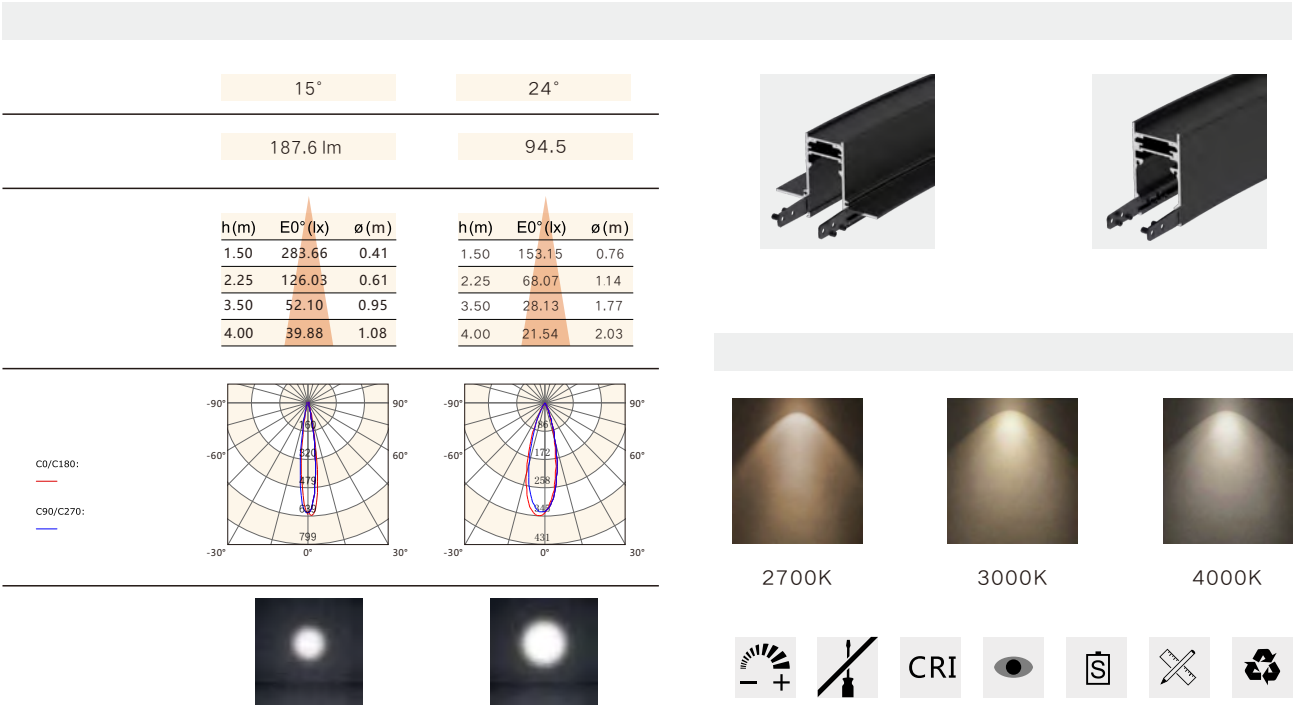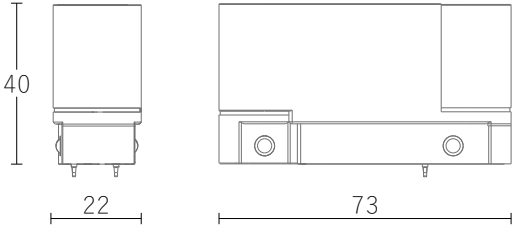





CM-CD2265H/L73/2W Ø
22*L65mm
6063 Aluminium
Sand BK/WH
IP20
Non DIM LEDs: Osram
Voltage: DC24V
Wattage: 2W (1W+1W)
CCT: 2700K/3000K/4000K
CRI:≥90
15°/24°

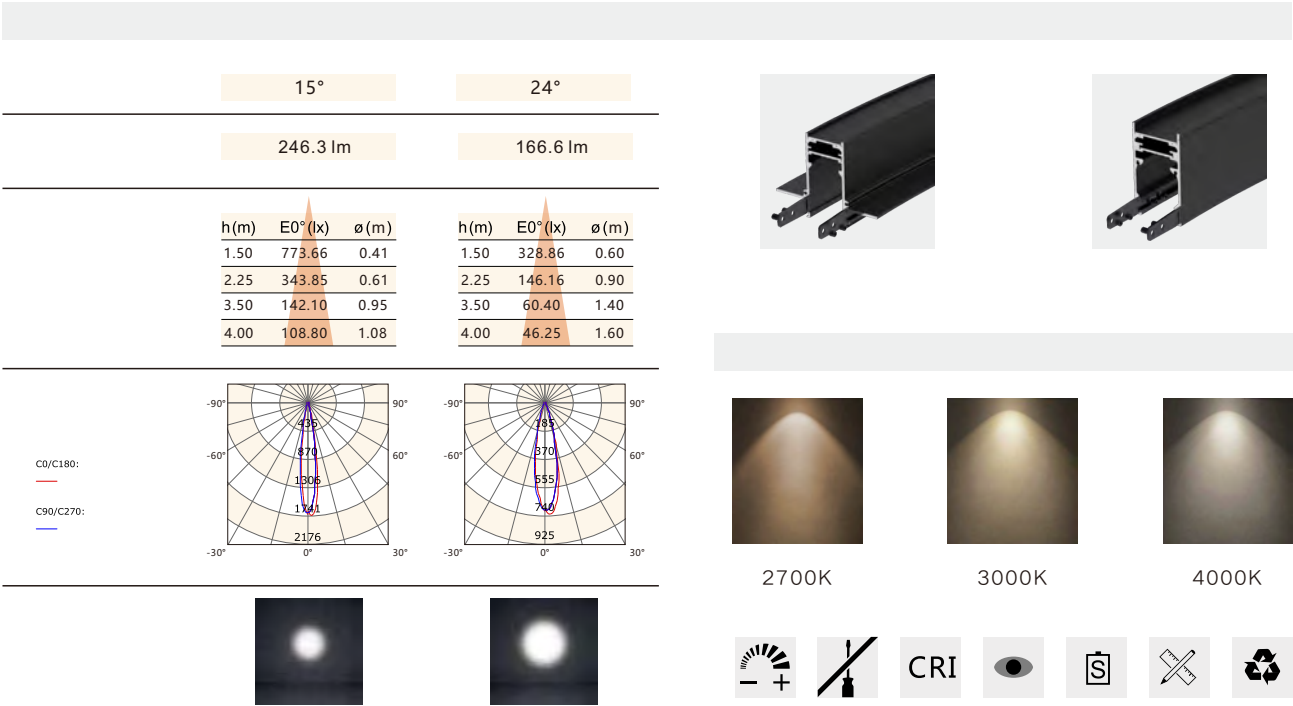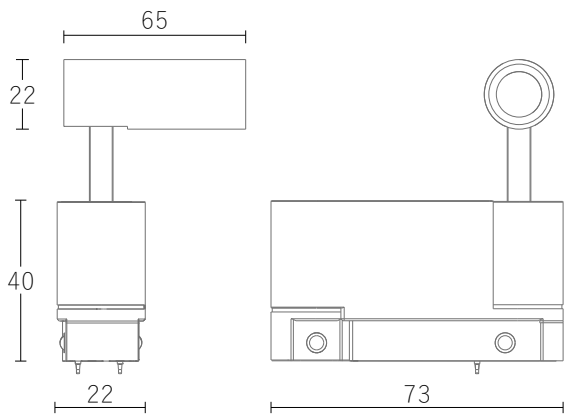






CM-SD2265H/3W
 Ø 22*L65mm
 6063 Aluminium
 Sand, Black or White
 IP20
 Non Dimmable Osram
 Voltage: DC24V
 Wattage: 3W (1x3W LED)
 CCT : 2700K/3000K/4000K
 CRI : ≥90
 15°/24°

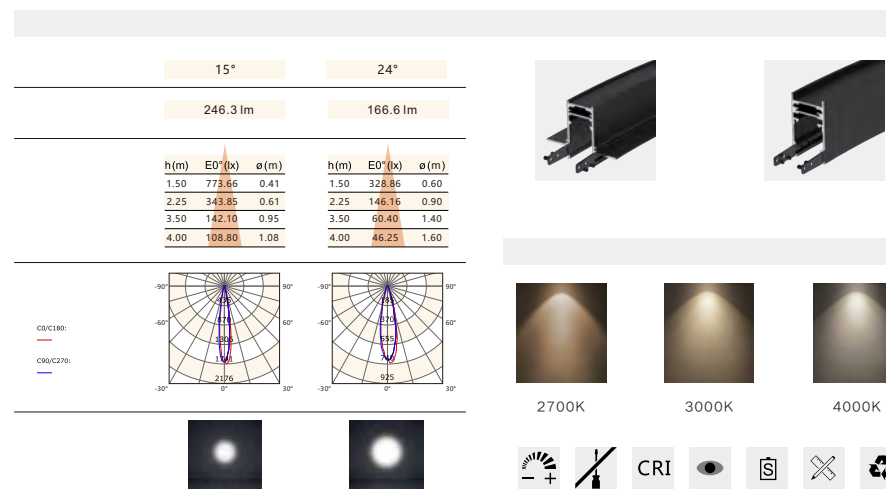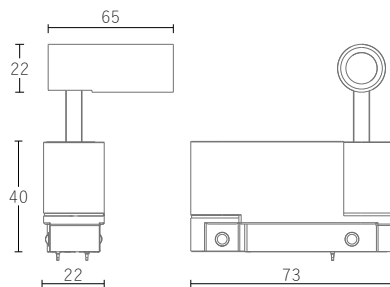




CM-SD223463H/5W
 Ø 34*L63mm
 6063 Aluminium
 Sand, Black or White
 IP20
 Non Dimmable Osram
 Voltage: DC24V
 Wattage: 5W (1x5W)
 CCT: 2700K/3000K/4000K
 CRI :≥90
 15°/24°/38°

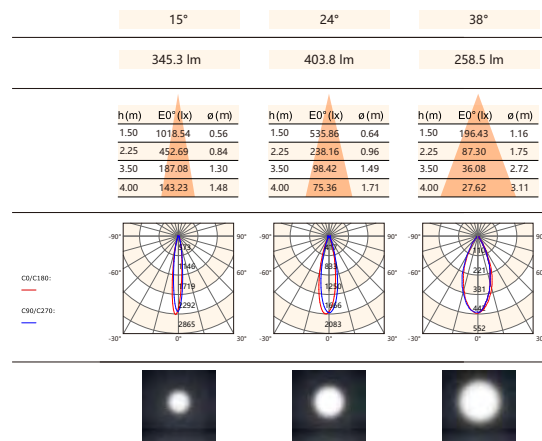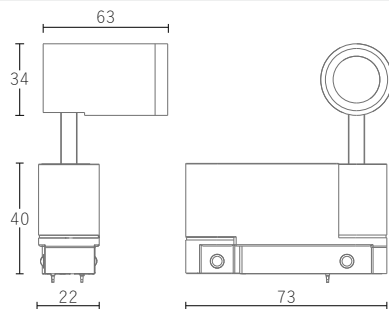


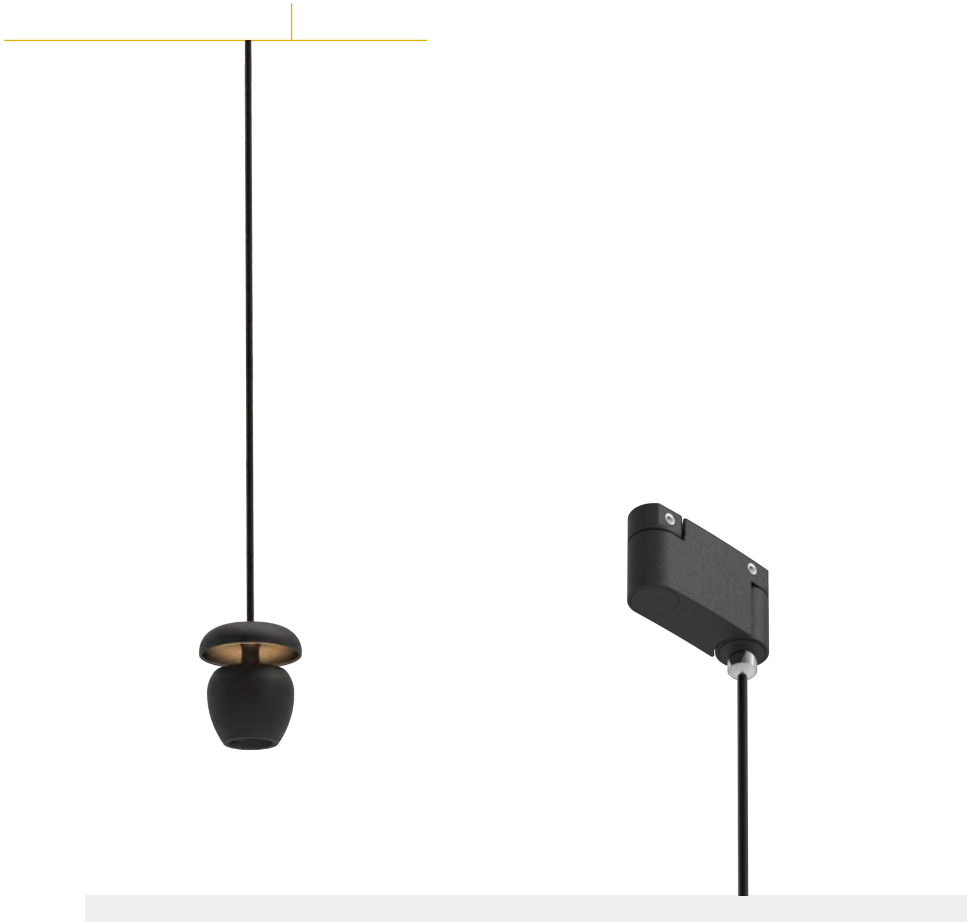

CM-DXD226068H/5W
 Ø 60*H68mm
 6063 Aluminium
 Sand, Black or White
 IP20
 Nom Dimmable Osram
 Voltage: DC24V
 Wattage: 5W (1x5W)
 CCT: 2700K/3000K/4000K
 CRI: ≥90
 15°/24°/38°

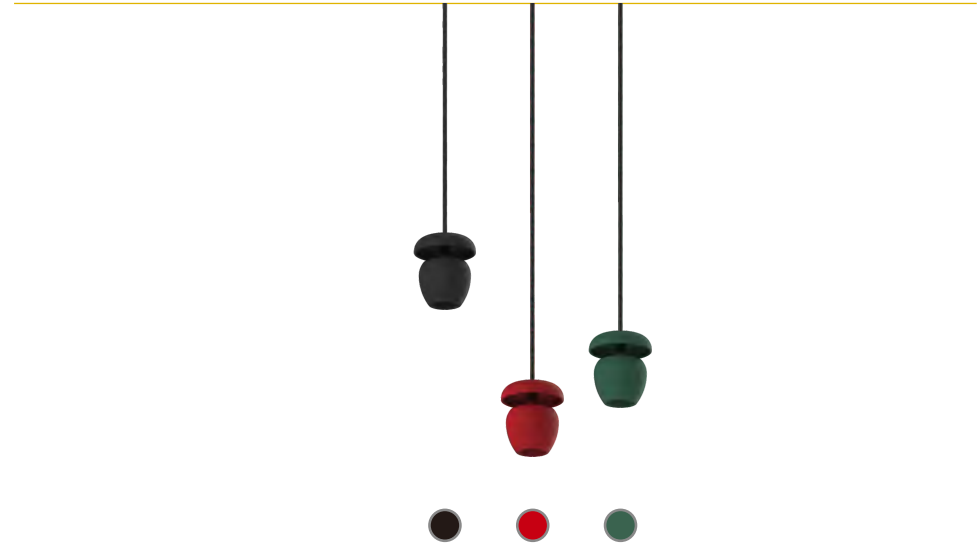

High quality silicon paint finish

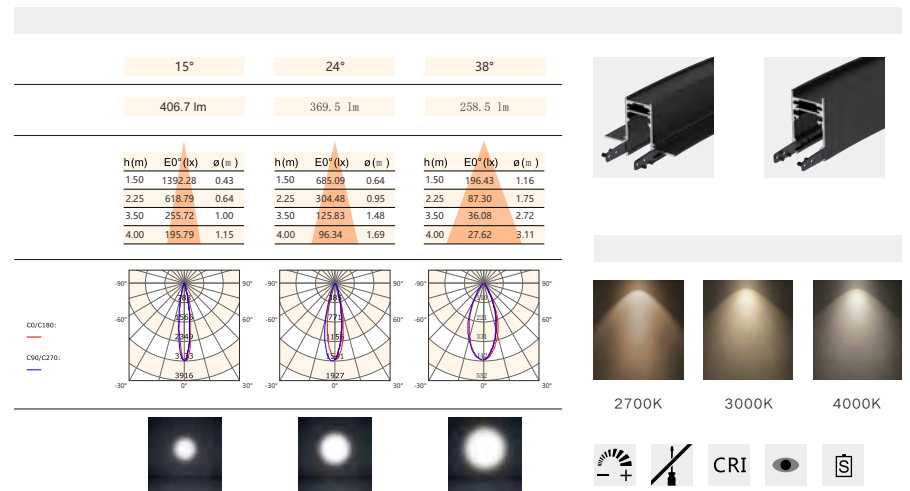







Arc combination
Grille lamp







CM-GSD2240H/L124/3W
 L124*W22*H40mm
 6063 Aluminium
 Sand, Black or White
 IP20
 Non DIM LEDs: Osram
 Voltage: DC24V
 Voltage: 3W (3x1W /)
 2700K/3000K/4000K
 CRI: ≥90
 15°/24°

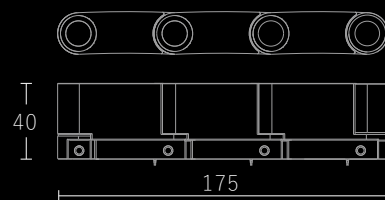

CM-GSD2240H/L175/4W
 L175*W22*H40mm
 6063 Aluminium
 Sand, Black or White
 IP20
 Non DIM LEDs: Osram
 Voltage: DC24V
 Voltage: 4W (4x1W /)
 CCT: 700K/3000K/4000K
 CRI: ≥90
 15°/24°

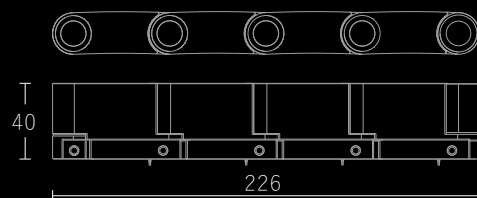

CM-GSD2240H/L226/5W
 L226*W22*H40mm
 6063 Aluminum
 Sand BK/WH
 IP20
 Non DIM LEDs: Osram
 Voltage: DC24V
 Wattage: 5W (5x1W)
 CCT: 2700K/3000K/4000K
 CRI: ≥90
 15°/24°

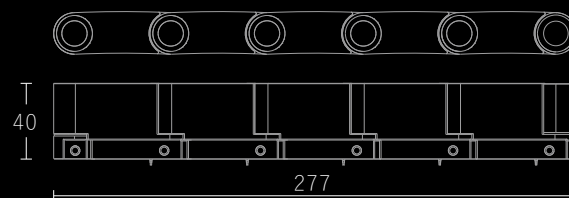


CM-GSD2240H/L277/6W
 L277*W22*H40mm
 6063 Aluminum
 Sand BK/WH
 IP20
 Non DIM LEDs: Osram
 Voltage: DC24V
 Wattage: 6W (6x1W /)
 CCT: 2700K/3000K/4000K
 CRI: ≥90
 15°/24°



Arc combination
linear lamp






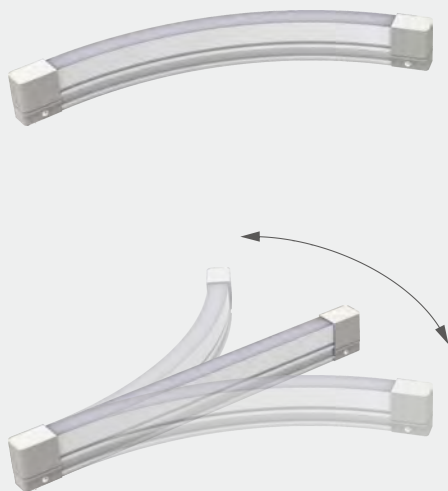

Curved sideways

CM-PMD2240H/L340/3W
W22*H40*L340mm
High quality silicon
Sand White
IP20
Non Dimmable Osram
Voltage: DC24V
Wattage: 3W
CCT: 2700K/3000K/4000K
CRI: ≥ 90
100°


Size (mm)

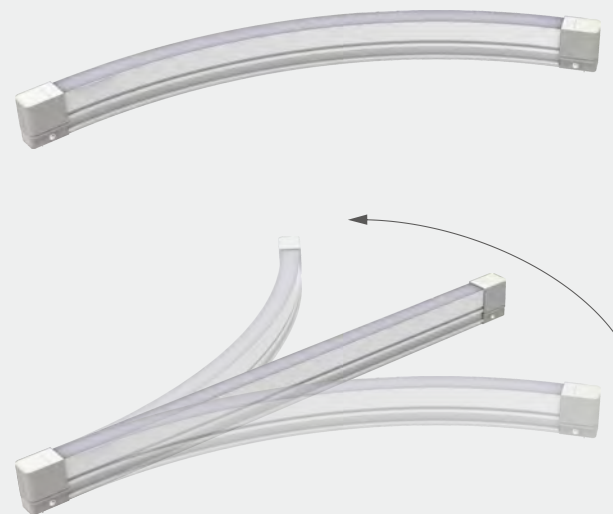


Curved sideways, not frontal

CM-PMD2240H/L518/5W
W22*H40*L518mm
High quality silicon
Sand White
IP20
Non Dimmable Osram
Voltage: DC24V
Wattage: 5W
CCT: 2700K/3000K/4000K
CRI: ≥ 90
100°

Size (mm)



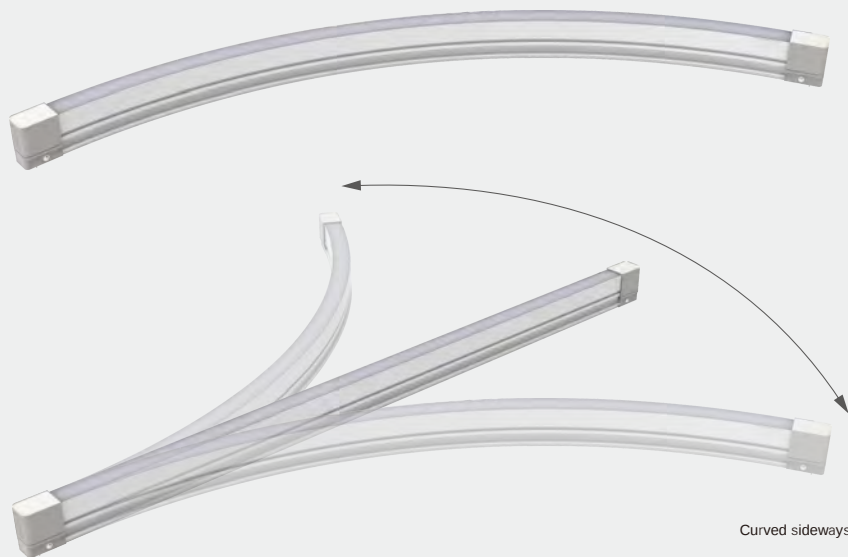


Curved sideways

CM-PMD2240H/L730/7W
W22*H40*L730mm
High quality silicon
Sand White
IP20
Non Dimmable Osram
Voltage: DC24V
Wattage: 7W
CCT: 2700K/3000K/4000K
CRI: ≥ 90
100°

100°

105.20 lm

h(m)	E0°(lx)	ø(m)
1.50	13.71	4.82
2.25	6.09	7.23
3.50	2.52	11.25
4.00	1.93	12.86



C0/C180:

C90/C270:

Size (mm)





 **COMLED**