



COMLED

360D LED Tube Luminaires

Realise your creativity

www.comled.com.au

COTENTS

^{360°}
F lexible tube

^{360°}
G ammaray


^{360°}
S traight series

^{360°}
C ircular series

^{360°}
S quare series


^{360°}
G aussian series

^{360°}
F loor series

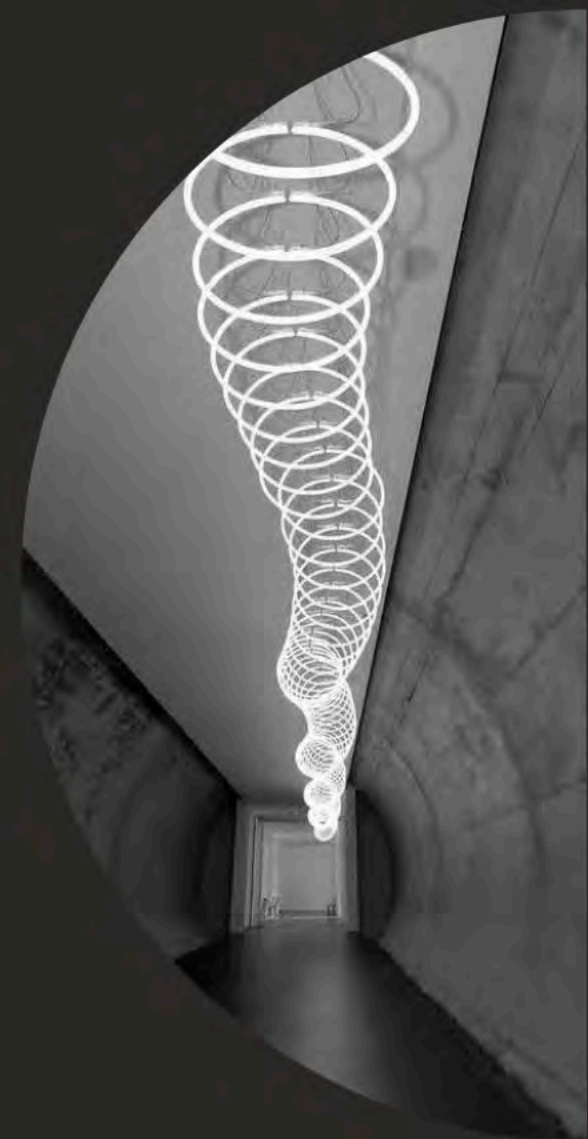

Flexible

D13/23/31/41mm

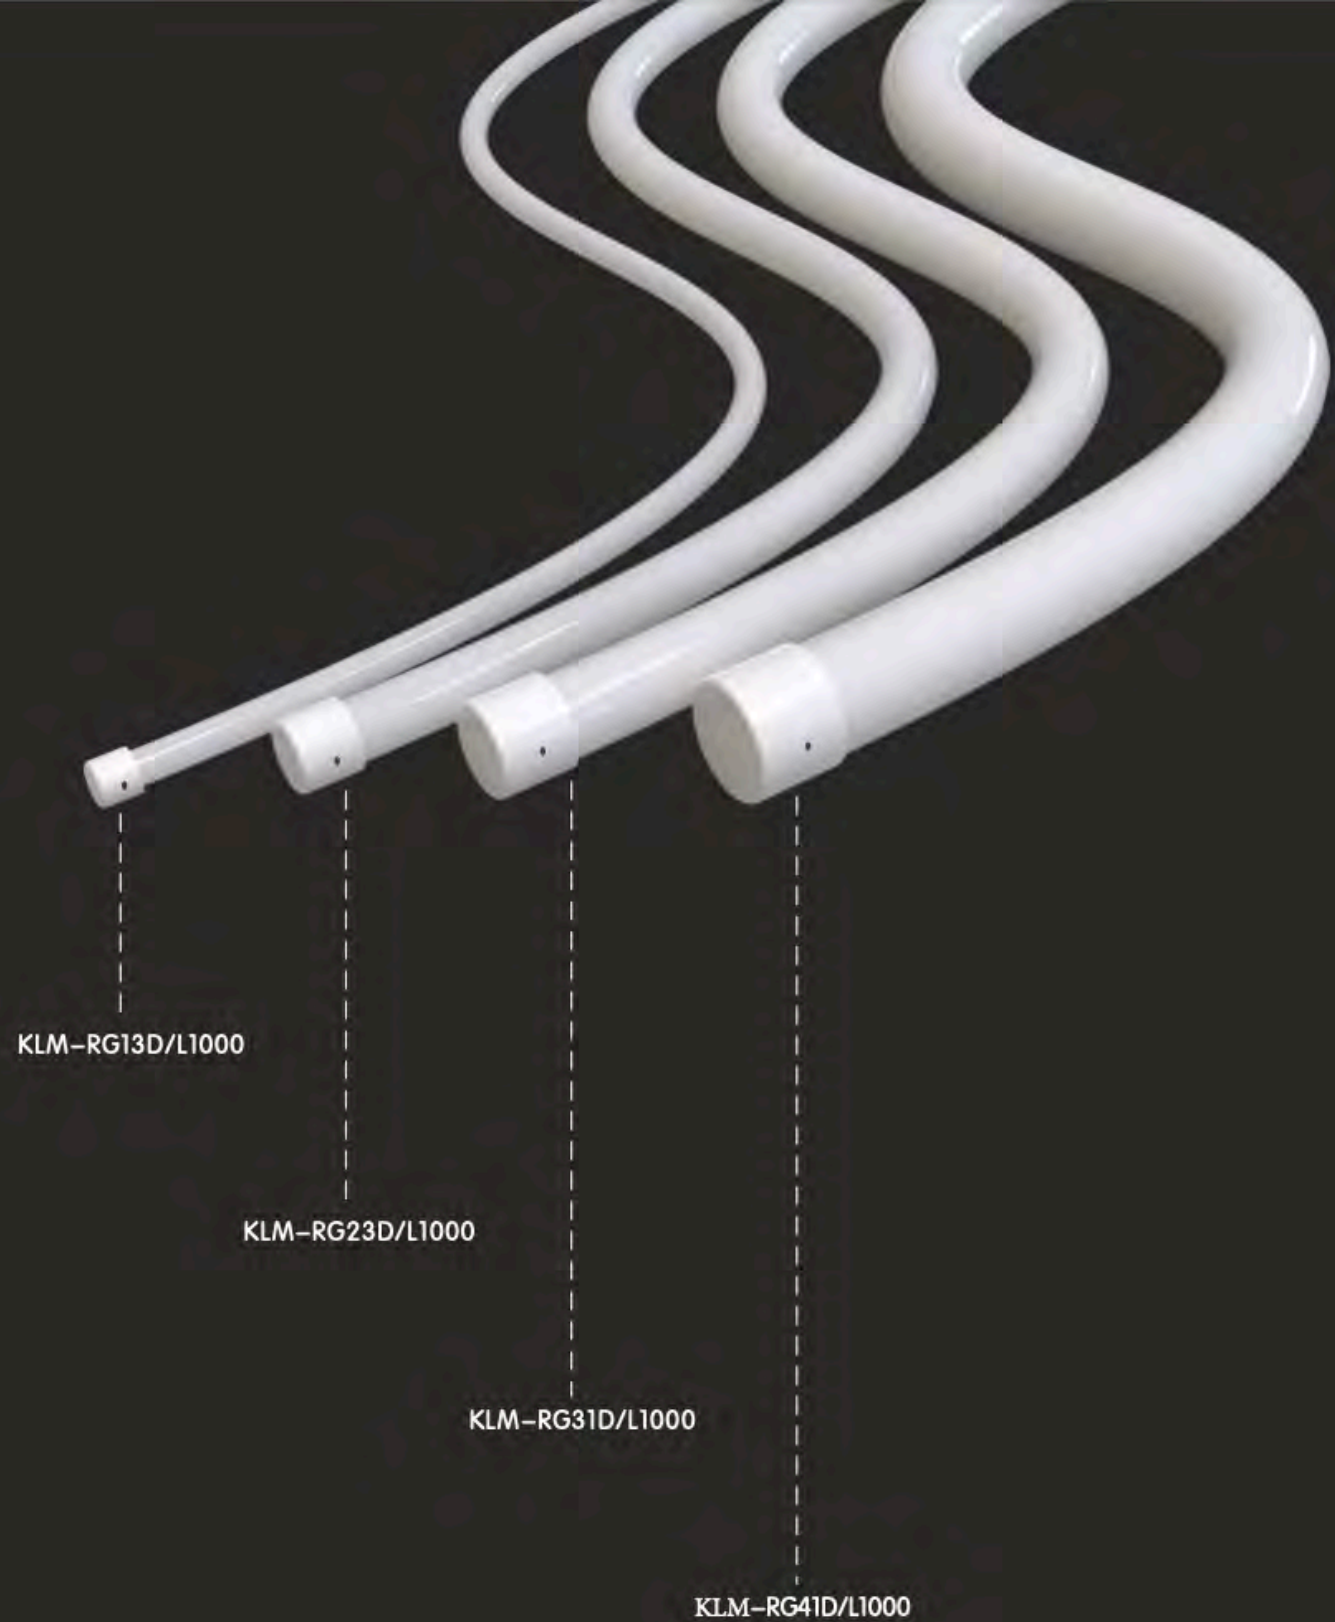

- Good light transmittance
- High refractive index
- no light spot
- uniform light emission
- Any length can be cut

DC24V safe voltage

MAX 10m


Free cut any size



Item no.: CM-RG13D/L1000/12W/A
 Lumen: 873lm
 Size: $\varnothing 13 \times L1000$ mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: DC24V
 Power: 12W/M
 CCT: 3000K/4000K/6000K/R/G/B
 CRI:Ra90
 Materials: High tensile silicone
 MAX 10M



Item no.: CM-RG23D/L1000/13W
 Lumen: 1040.29lm
 Size: $\varnothing 23 \times L1000$ mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: DC24V
 Power: 13W/M
 CCT: 3000K/4000K/6000K/R/G/B
 CRI:Ra90
 Materials: High tensile silicone
 MAX 10M

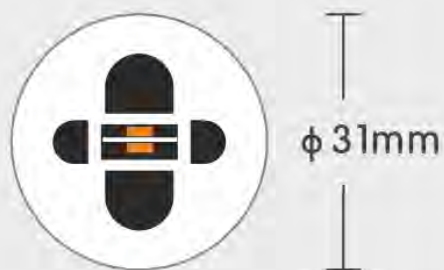

Item no.: CM-RG31D/L1000/16W
 Lumen: 1255.86lm
 Size: $\varnothing 31 \times L1000$ mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: DC24V
 Power: 16W/M
 CCT: 3000K/4000K/6000K/R/G/B
 CRI:Ra90
 Materials: High tensile silicone
 MAX 10M



Item no.: CM-RG41D/L1000/18W
 Lumen: 1652.16lm
 Size: $\varnothing 41 \times L1000$ mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: DC24V
 Power: 18W/M
 CCT: 3000K/4000K/6000K/R/G/B
 CRI:Ra90
 Materials: High tensile silicone
 MAX 10M

Flexible 360° Accessories

Silicon end of cap



φ 43*14mm

Silicon end of cap with cable



φ 43*24mm

Suspended Ring (Clear)



φ 48*15mm

Aluminum end of cap



φ 44*30mm

IP65 Aluminum end of cap



φ 44*30mm

Suspended Pole



L 1000mm

Trimless mounted



φ 80*20mm
φ 60*55mm

Recessed mounted



φ 66*36mm
φ 45*50mm

Surface mounted




φ 66*34mm
φ 18mm

Suspended kits




L 1000mm

Ceiling type

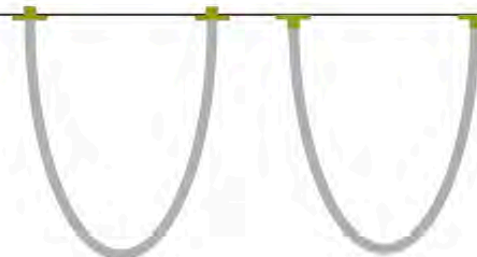


Suspended

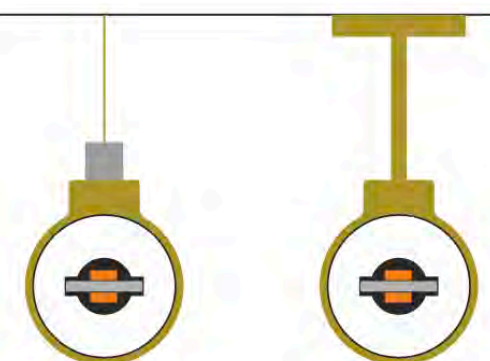




Gamma
D25mm
Different Wall Mounted

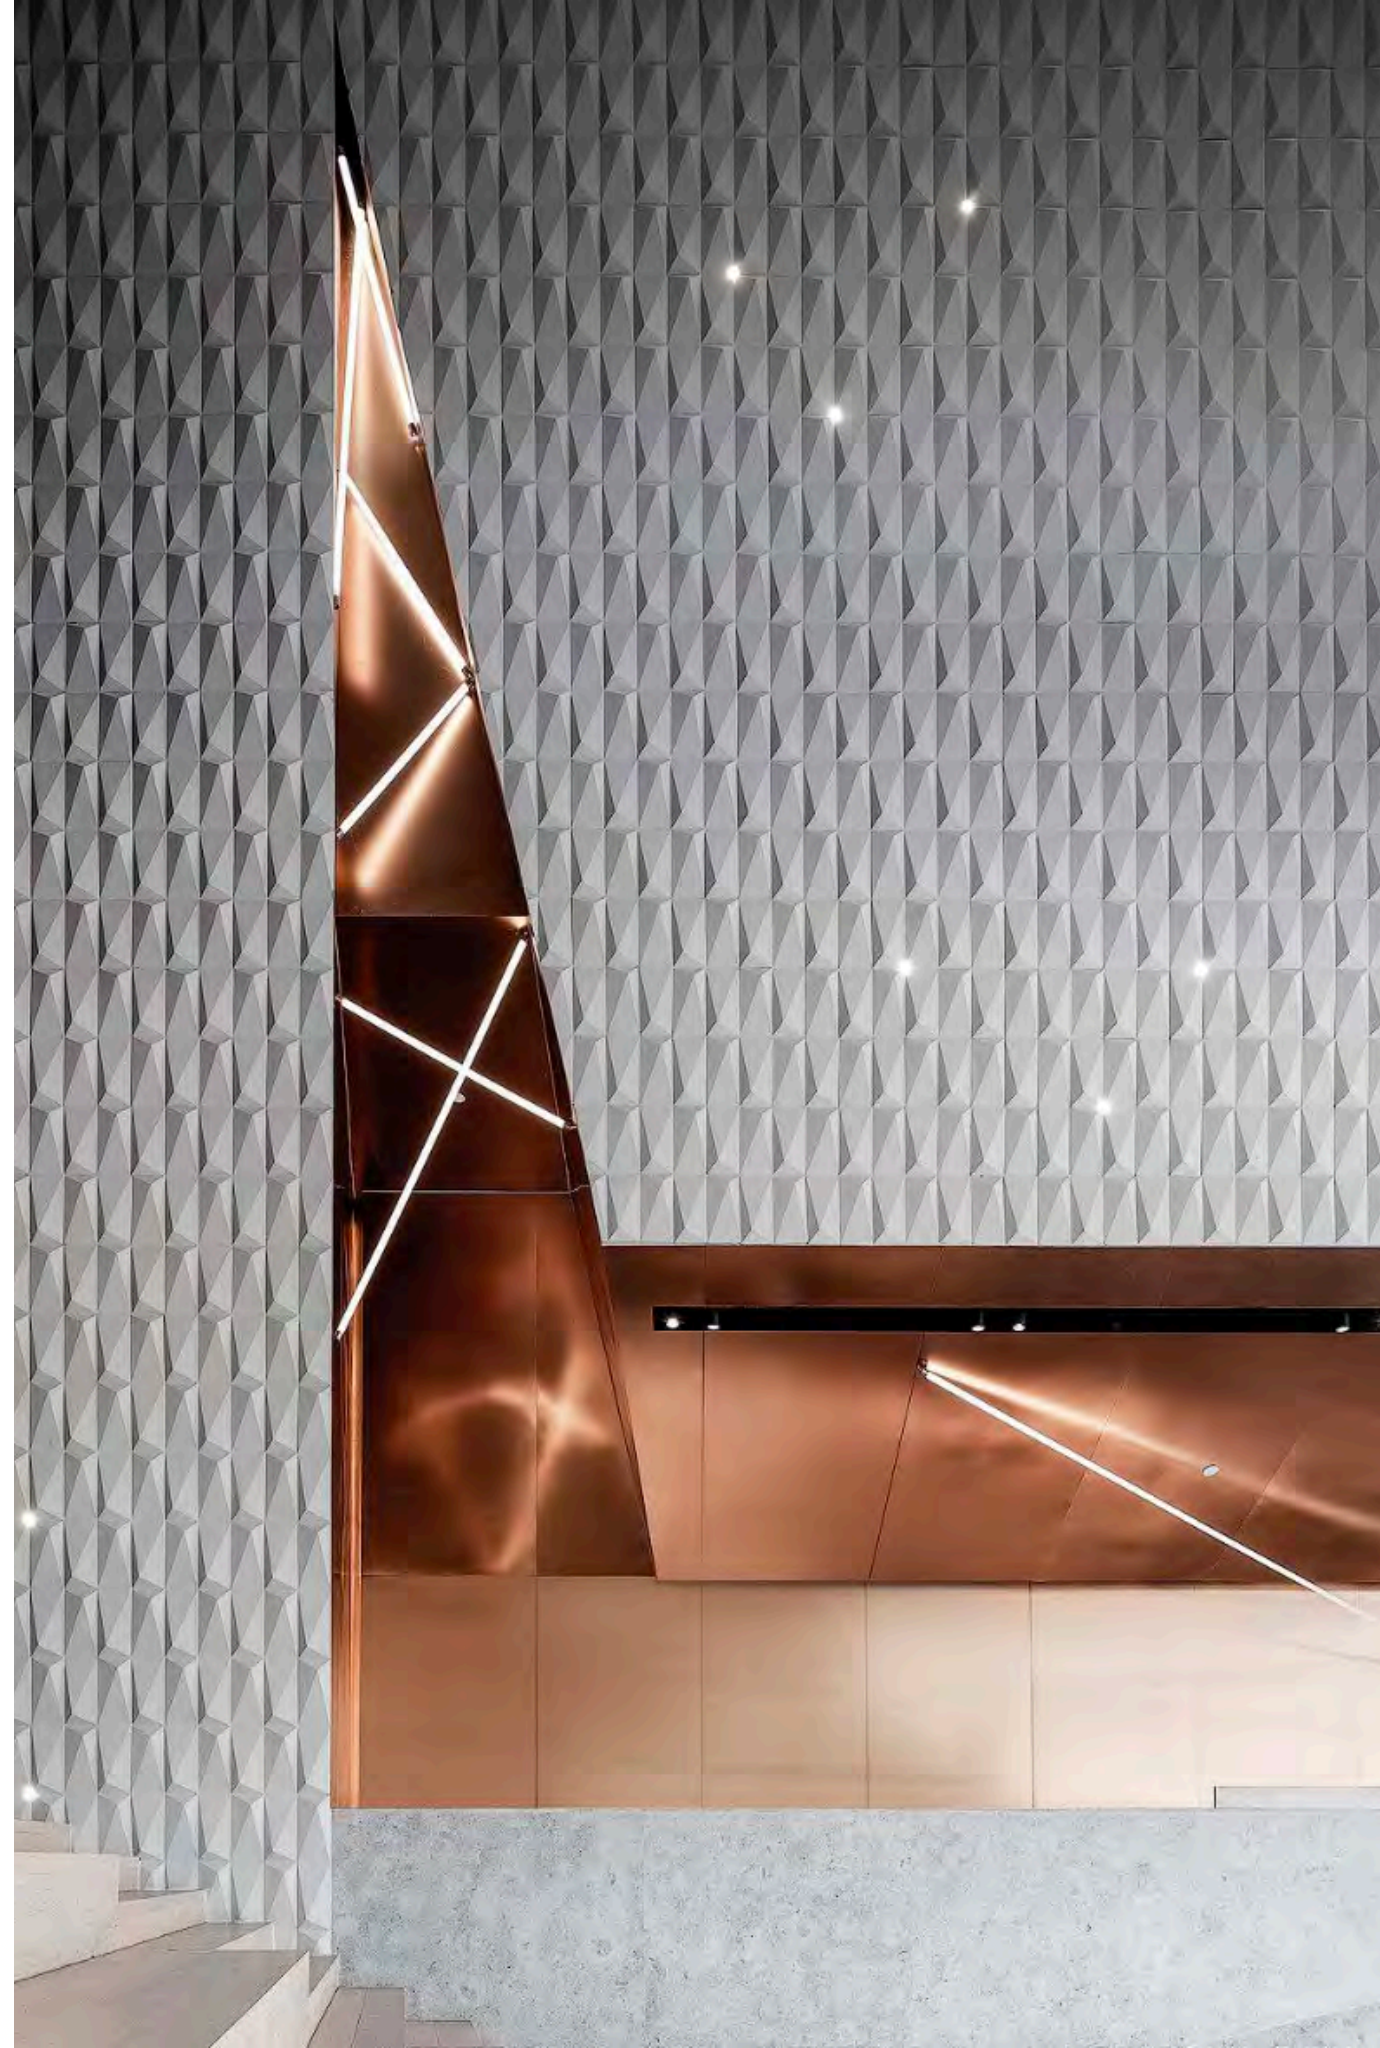



Free adjustable any angle

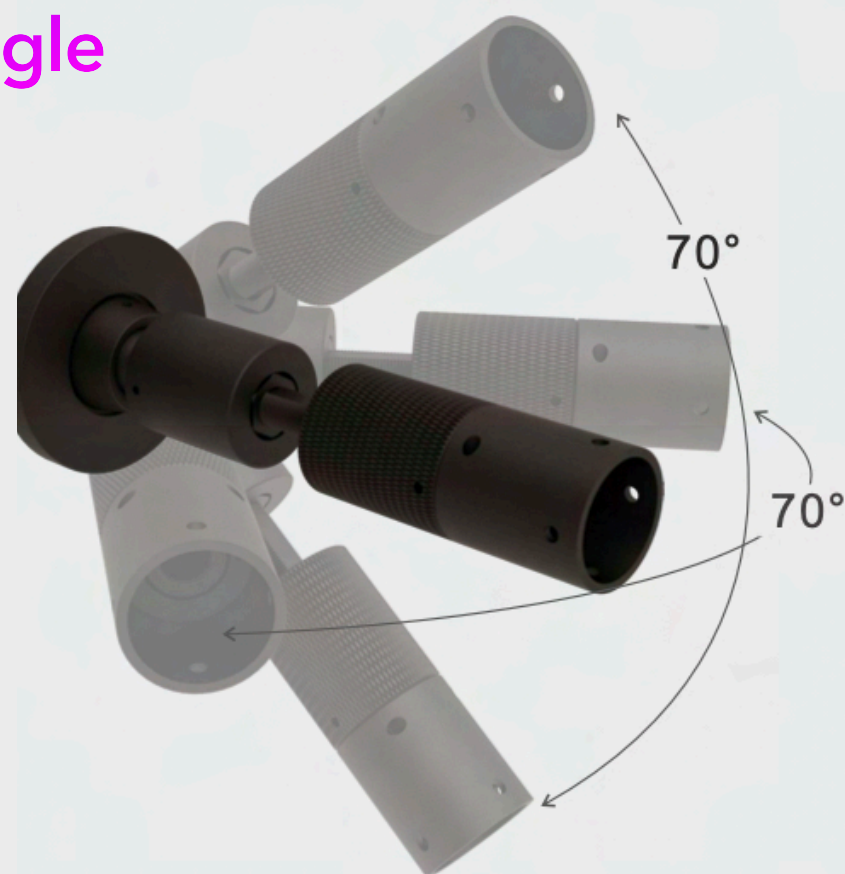



Item no.: CM-GM25D/L1000/16W
Lumen: 1255.86lm
Size: Ø25*1000mm
DIM: YES
LEDs: Bridgelux
Voltage: DC24V
Power: 18W/M
CCT: 3000K/4000K/6000K/R/G/B
CRI:Ra90
Materials: High tensile silicone
MAX 15M


The length of the lamp is more than 10 meters, a suspension wire needs to be installed

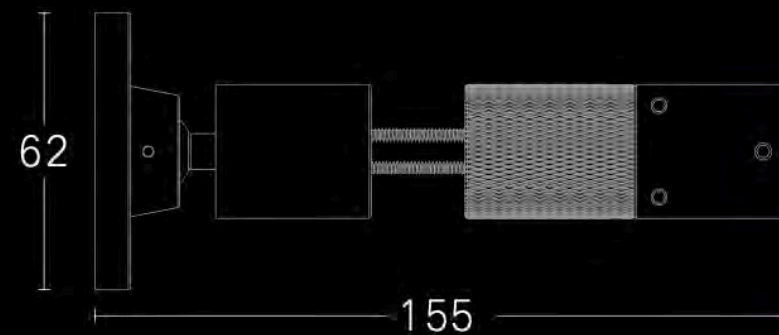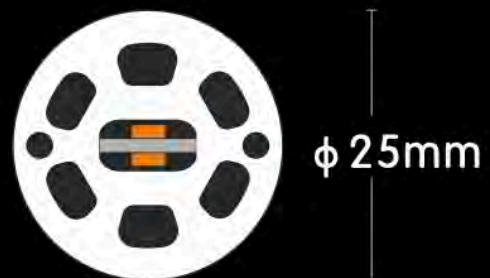



Rigid Tube

D20/30/40/50mm

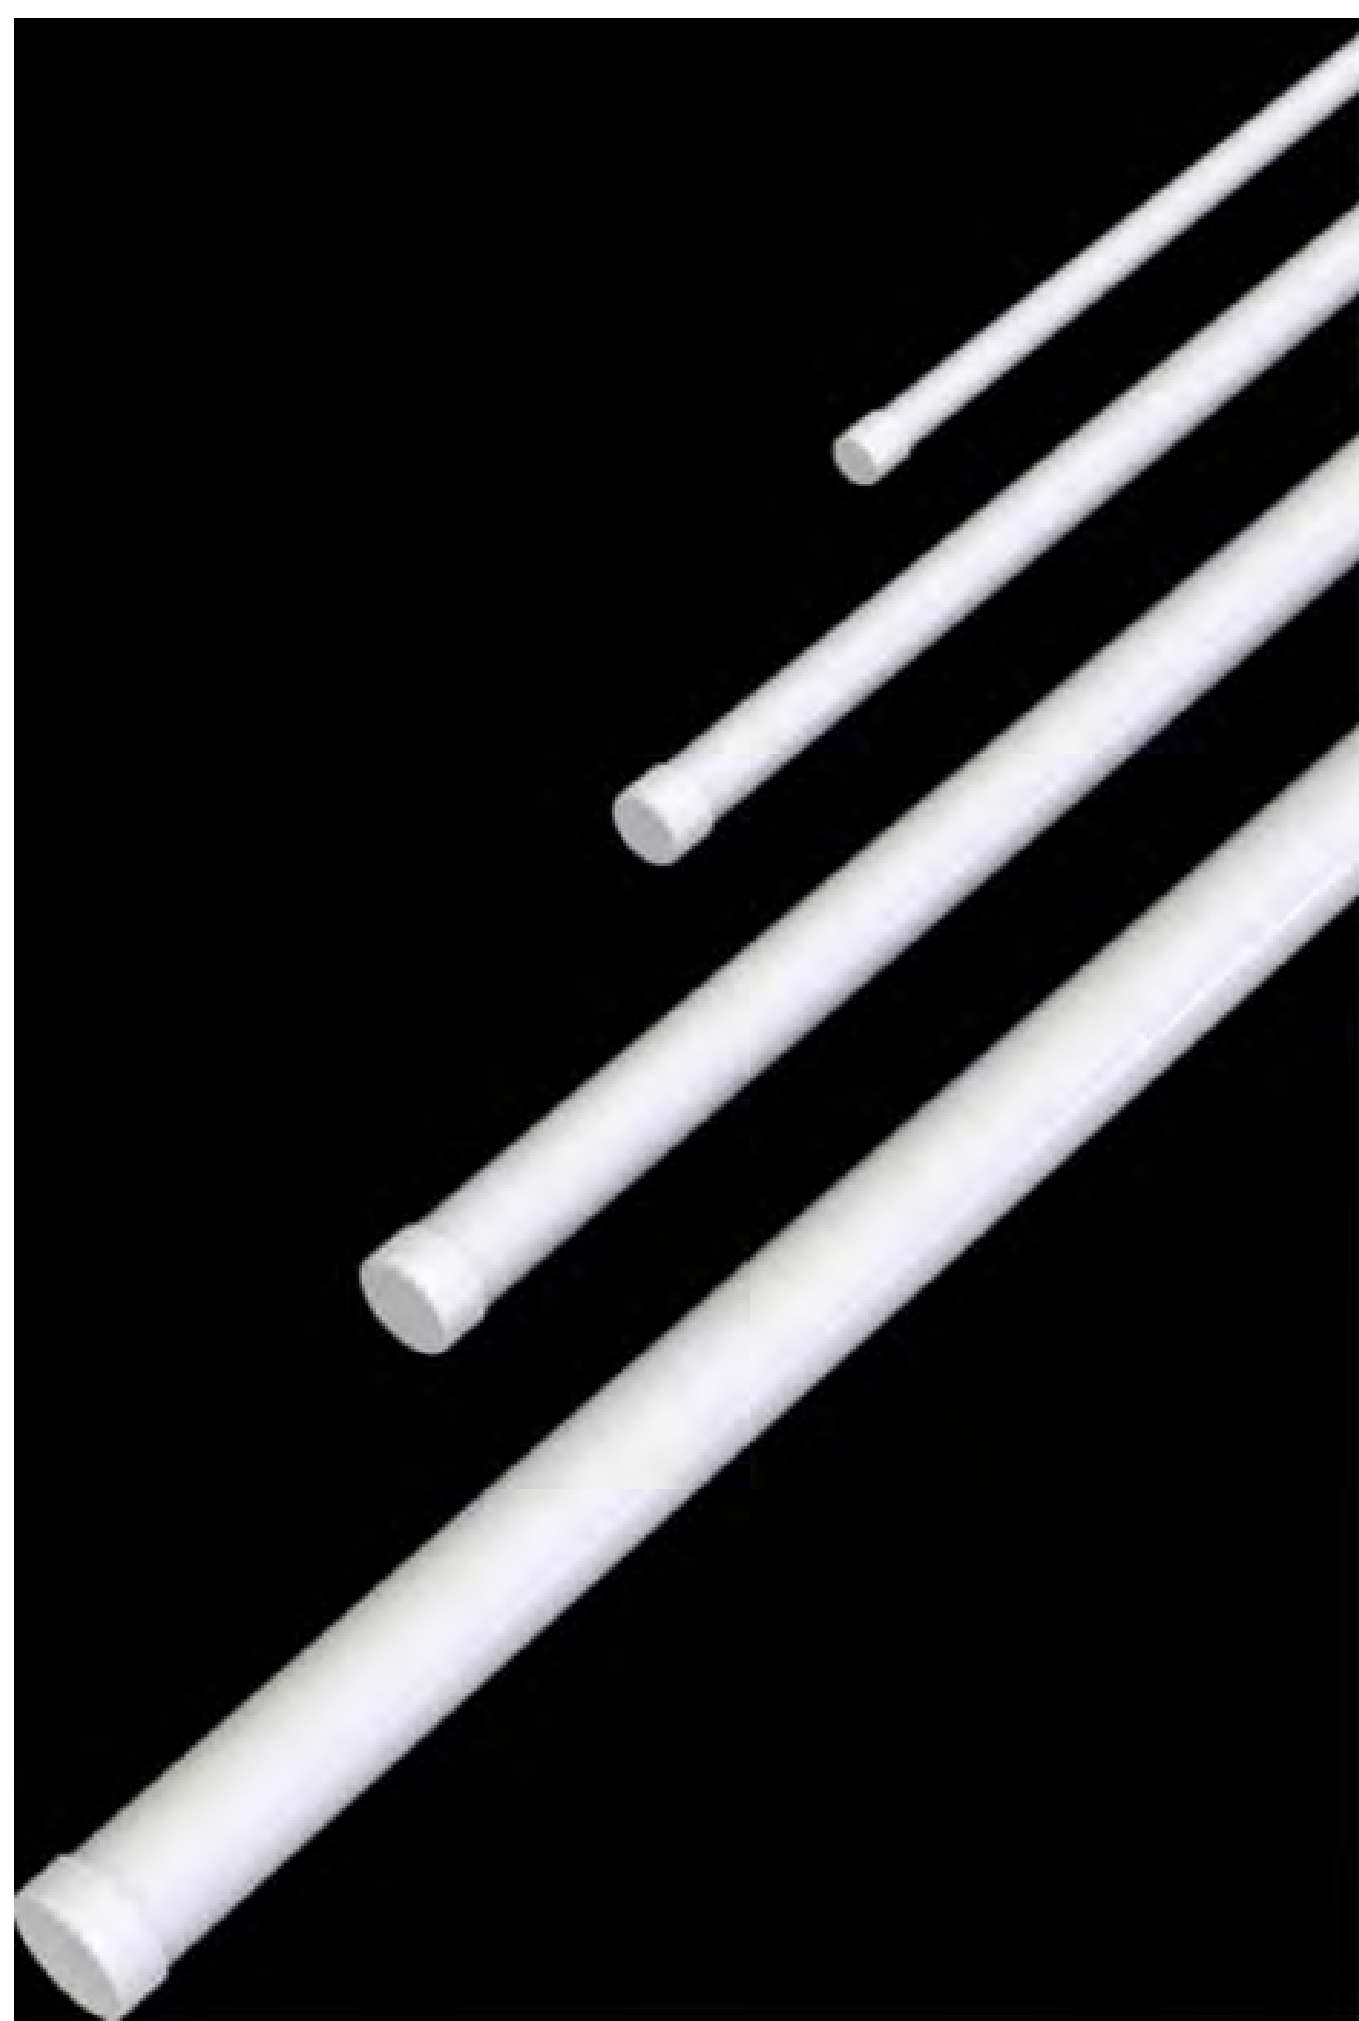

- Good light transmittance
- High refractive index
- uniform light emission
- no spot light
- Customizable styling

DC24V safe voltage

MAX 6m

Free combination design



Item no.: CM-YG20D/L1000/12W
 Lumen: 889.44lm
 Size: $\varnothing 20 \times L1000$ mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: DC24V
 Power: 12W/M
 CCT: 3000K/4000K/6000K/R/G/B
 CRI:Ra90
 Materials: Acrylic + High tensile silicone
 MAX 6M



Item no.: CM-YG30D/L1000/13W
 Lumen: 1103.49lm
 Size: $\varnothing 30 \times L1000$ mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: DC24V
 Power: 13W/M
 CCT: 3000K/4000K/6000K/R/G/B
 CRI:Ra90
 Materials: Acrylic + High tensile silicone
 MAX 6M



Item no.: CM-YG40D/L1000/16W
 Lumen: 1228.51lm
 Size: $\varnothing 40 \times L1000$ mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: DC24V
 Power: 16W/M
 CCT: 3000K/4000K/6000K/R/G/B
 CRI:Ra90
 Materials: Acrylic + High tensile silicone
 MAX 6M



Item no.: CM-YG50D/L1000/18W
 Lumen: 1599.64lm
 Size: $\varnothing 50 \times L1000$ mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: DC24V
 Power: 18W/M
 CCT: 3000K/4000K/6000K/R/G/B
 CRI:Ra90
 Materials: Acrylic + High tensile silicone
 MAX 6M

Rigid 360° Accessories

Vertical end of cap



φ 52*30mm

Vertical end of cap with cable



φ 52*70mm

Vertical base mounted



φ 60*60mm

Horizontal end of cap



φ 56*53mm

Suspended kits



L 1000mm

Suspended Pole



L 1000mm

2T connector



144*64*64mm

L connector



104*104*64mm

Flat 3T



144*104*64mm

Three-dimensional 3T



104*104*104mm

Flat 4T



144*144*64mm

Three-dimensional 4T



144*104*104mm

5T



144*144*104mm

6T



144*144*144mm

Surface accessories



φ 72*9mm

Surface accessories



φ 56*18mm



Connector accessories



φ 55*95mm

Installation



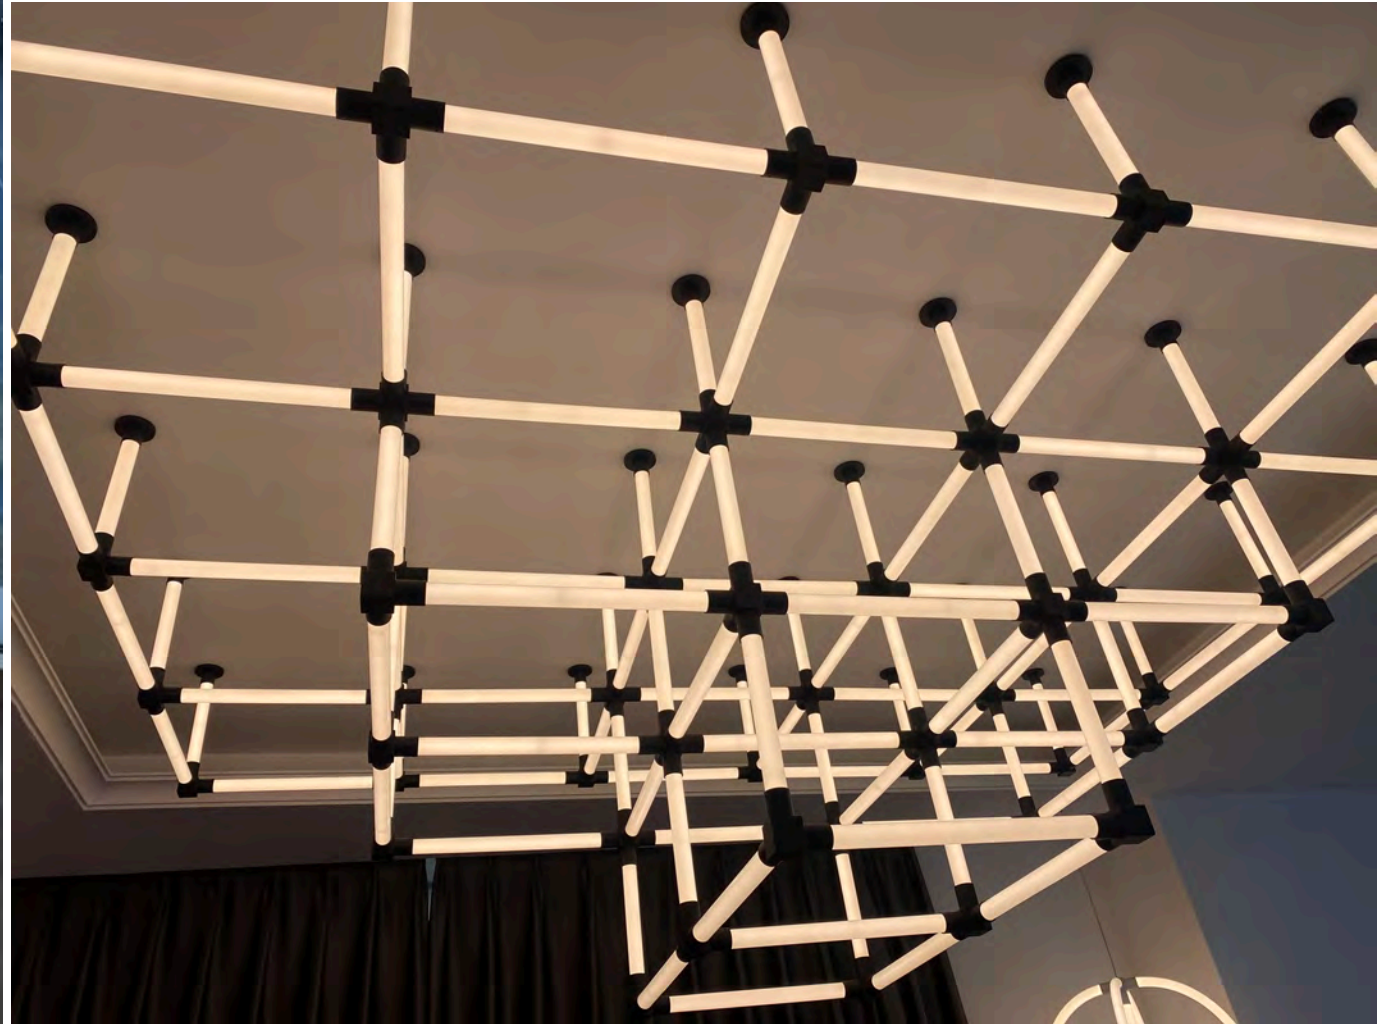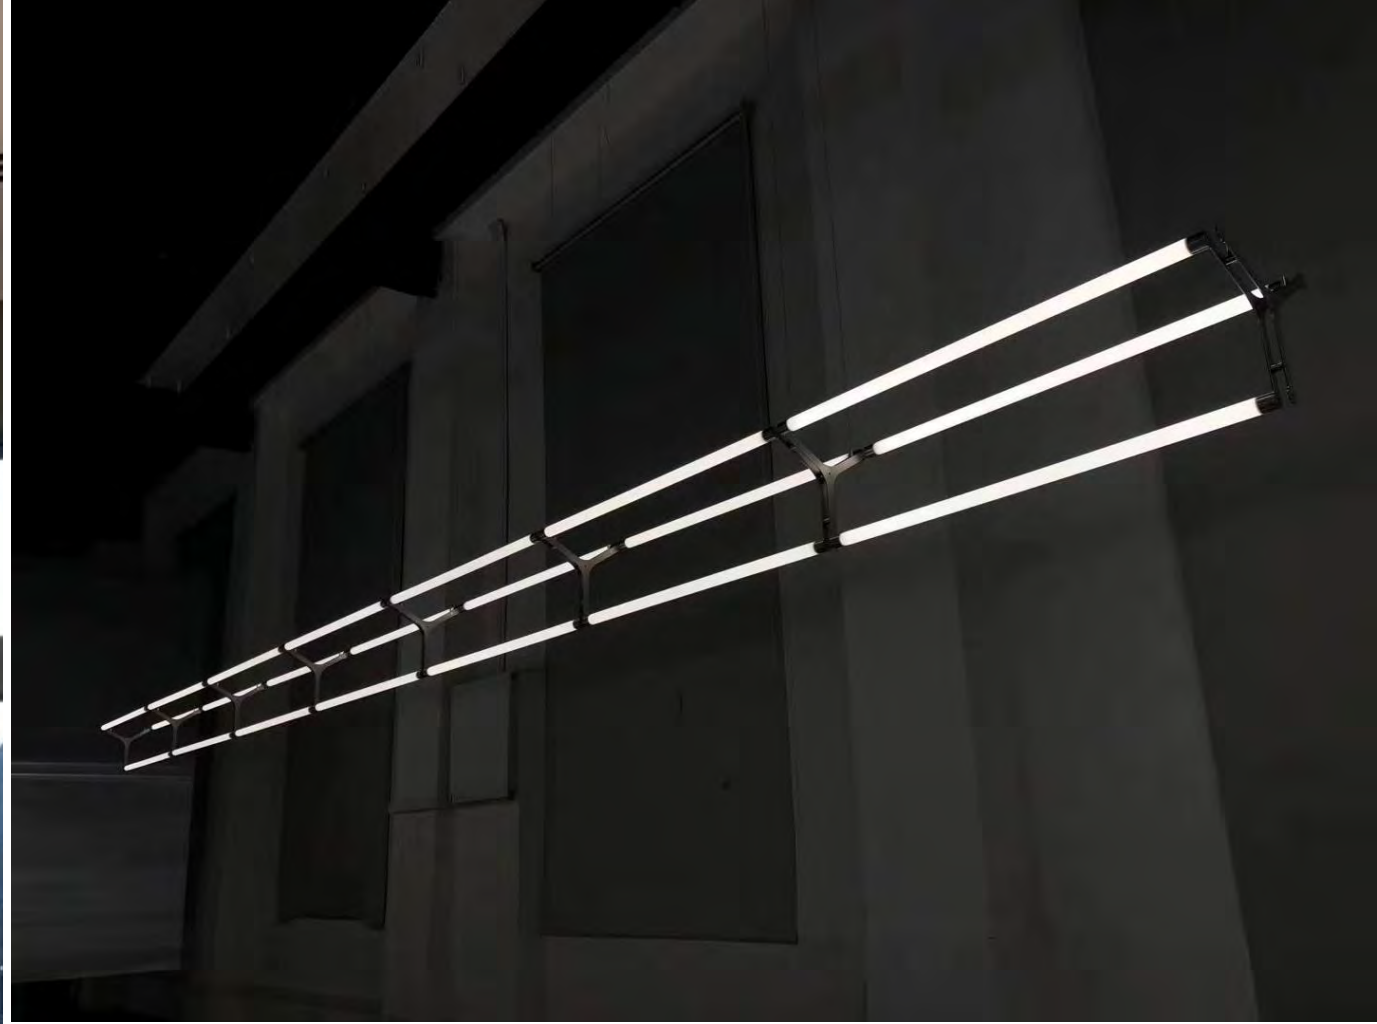

Circular



D20/30/40/50mm

C ircular



- Good light transmittance
- High refractive index
- uniform light emission
- no spot light
- Customizable styling

Circular

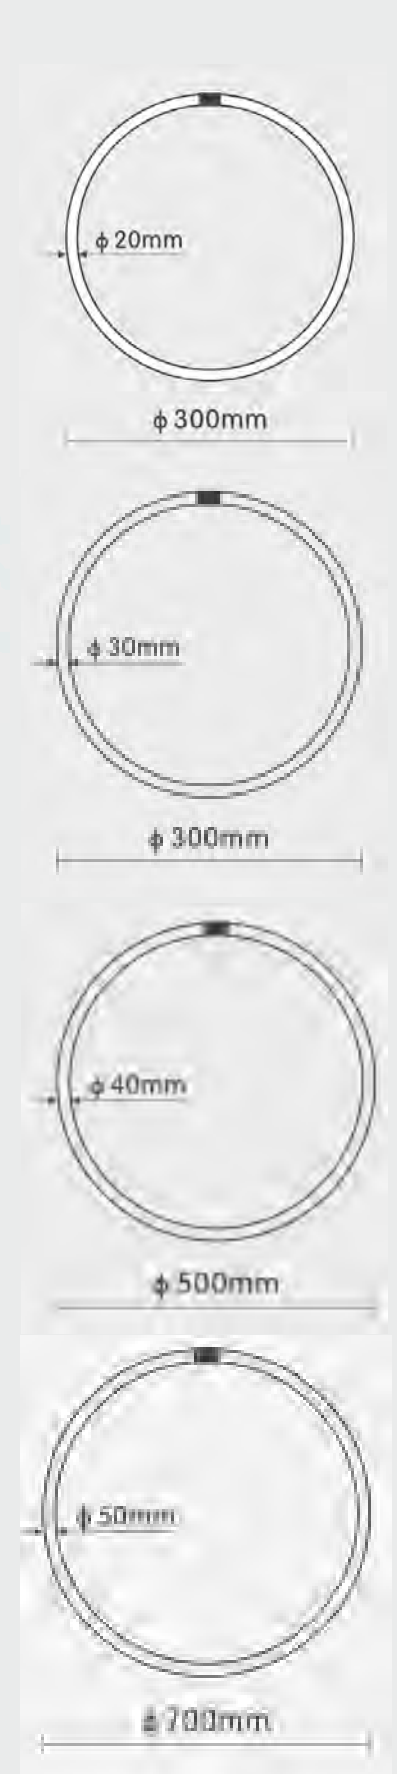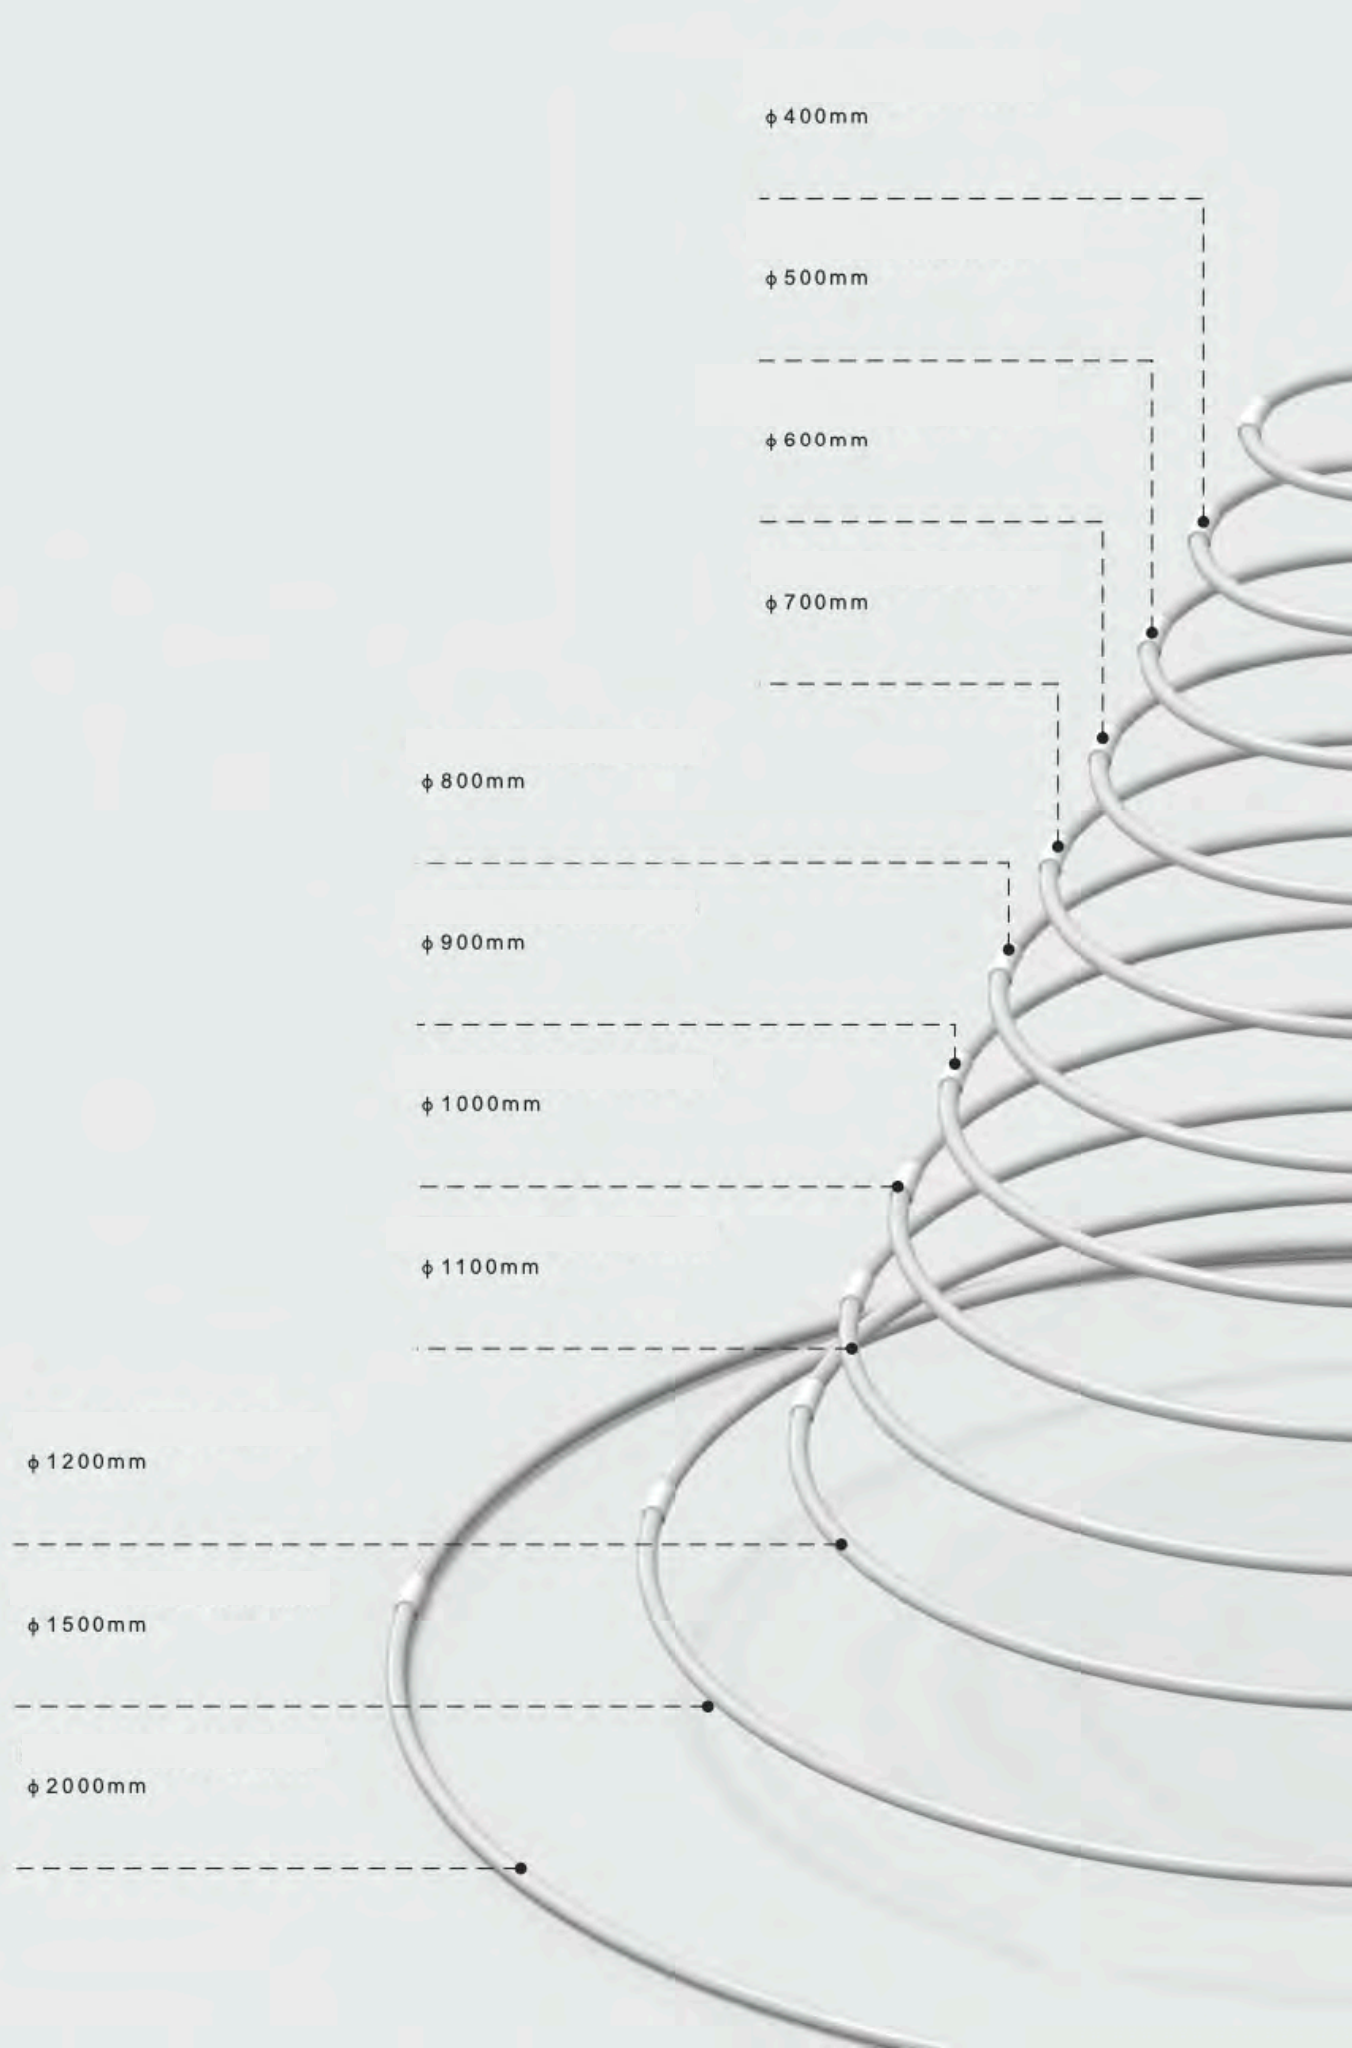

Item no.: CM-YG2
DIM: YES
LEDs: Bridgelux
Voltage: DC24V
Power: 10W (12W/M)
CCT: 3000K/4000K/6000K/R/G/B
CRI:Ra90
Materials: Acrylic + High tensile silicone

Circular 360° Accessories

Connector accessoires



φ 45*88mm

Suspended Pole



L 1000mm

Suspended Kits



L 1000mm

Surface Kits



φ 45*18mm

Suspended



Ceiling type



Square


D20/30/40/50mm

Square






DC24V soft voltage
Shape & Length can be customized
MAX 6M for connect

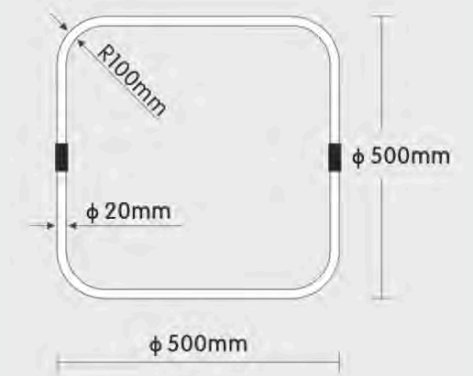

Item no.: CM-YG20D/F500/21W Tube
 Dia: $\phi 20\text{mm}$
 Size: 500*500mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: DC24V
 Power: 21W (12W/M)
 CCT: 3000K/4000K/6000K/R/G/B
 CRI: Ra90
 Materials: Acrylic + High tensile silicone

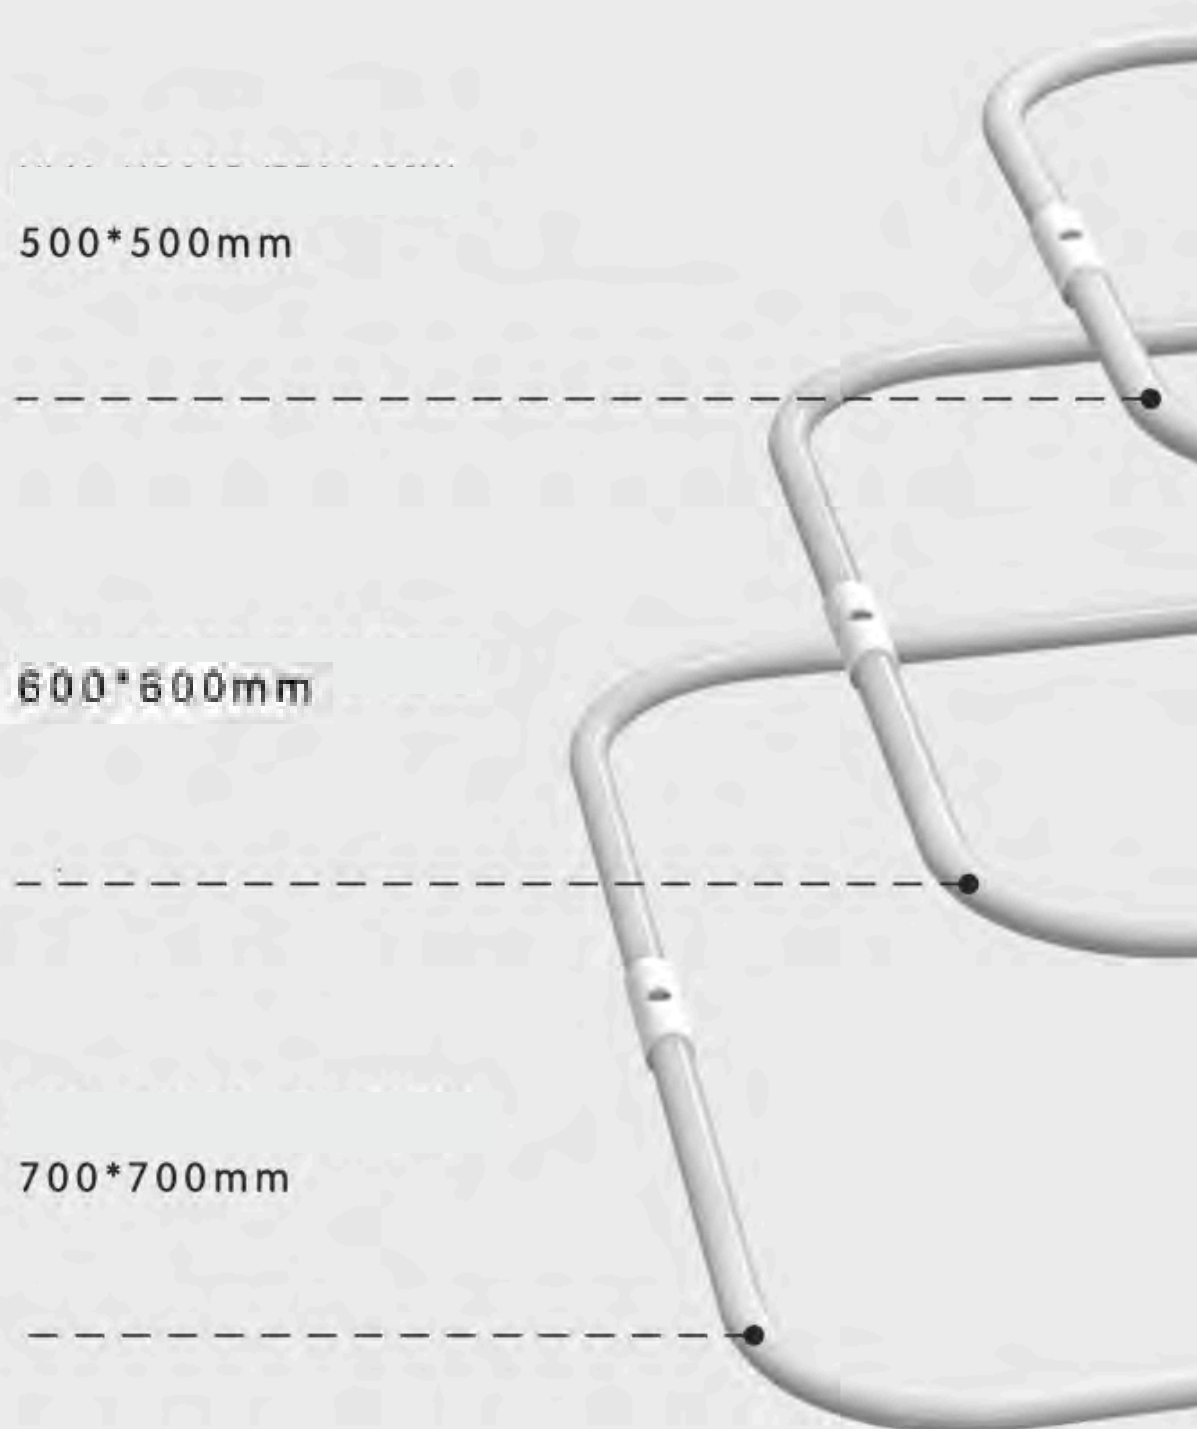


500*500mm

600*600mm

700*700mm

D30mm

360°

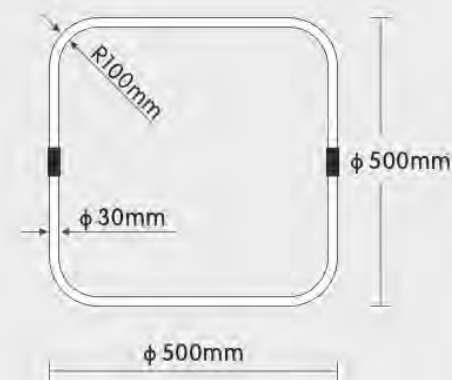

Item no.: CM-YG30D/F500/22W Tube
Dia: $\phi 30\text{mm}$
Size: 500*500mm
DIM: YES
LEDs: Bridgelux
Voltage: DC24V
Power: 22W (12W/M)
CCT: 3000K/4000K/6000K/R/G/B
CRI: Ra90
Materials: Acrylic + High tensile silicone


500*500mm

600*600mm


700*700mm

D40mm

360°

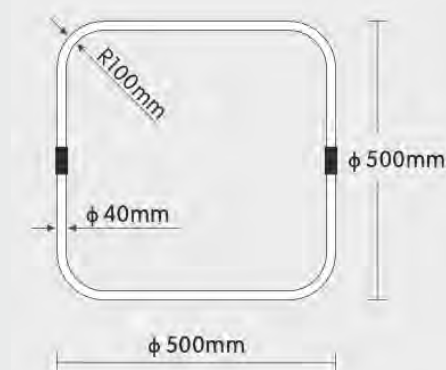

Item no.: CM-YG40D/F500/28W Tube
Dia: φ40mm
Size: 500*500mm
DIM: YES
LEDs: Bridgelux
Voltage: DC24V
Power: 28W (16W/M)
CCT: 3000K/4000K/6000K/R/G/B
CRI:Ra90
Materials: Acrylic + High tensile silicone

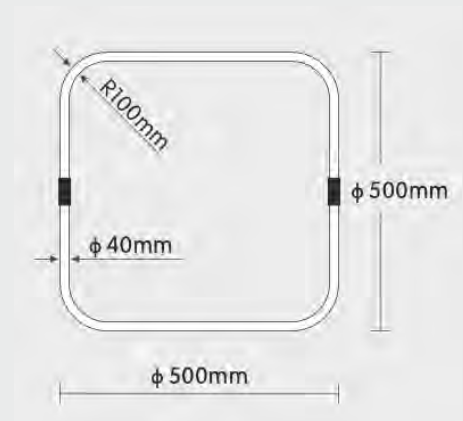

Item no.: CM-YG50D/F600/37W Tube
Dia: φ50mm
Size: 600*600mm
DIM: YES
LEDs: Bridgelux
Voltage: DC24V
Power:37W
CCT: 3000K/4000K/6000K/R/G/B
CRI:Ra90
Materials: Acrylic + High tensile silicone

Square 360°

Accessories

Connector accessoires



φ 55*95mm

Suspended Pole



L 1000mm

Suspended Kits



L 1000mm

Surface Kits



φ 56*18mm

Suspended



Ceiling type



Acrylic Tube

D30MM






Item no.: CM-YG30D/L1050/13W/S
Lumen: 741.33lm
Size: Ø30*1050mm
DIM: YES
LEDs: Bridgelux
Voltage: DC24V
Power: 13W/M
Beam angle: 180°
CCT: 3000K/4000K/6000K/R/G/B
CRI:Ra90
Materials: Acrylic + High tensile silicone
MAX 6M



Magnetic
360° Tube
+
Magnetic Spotlights

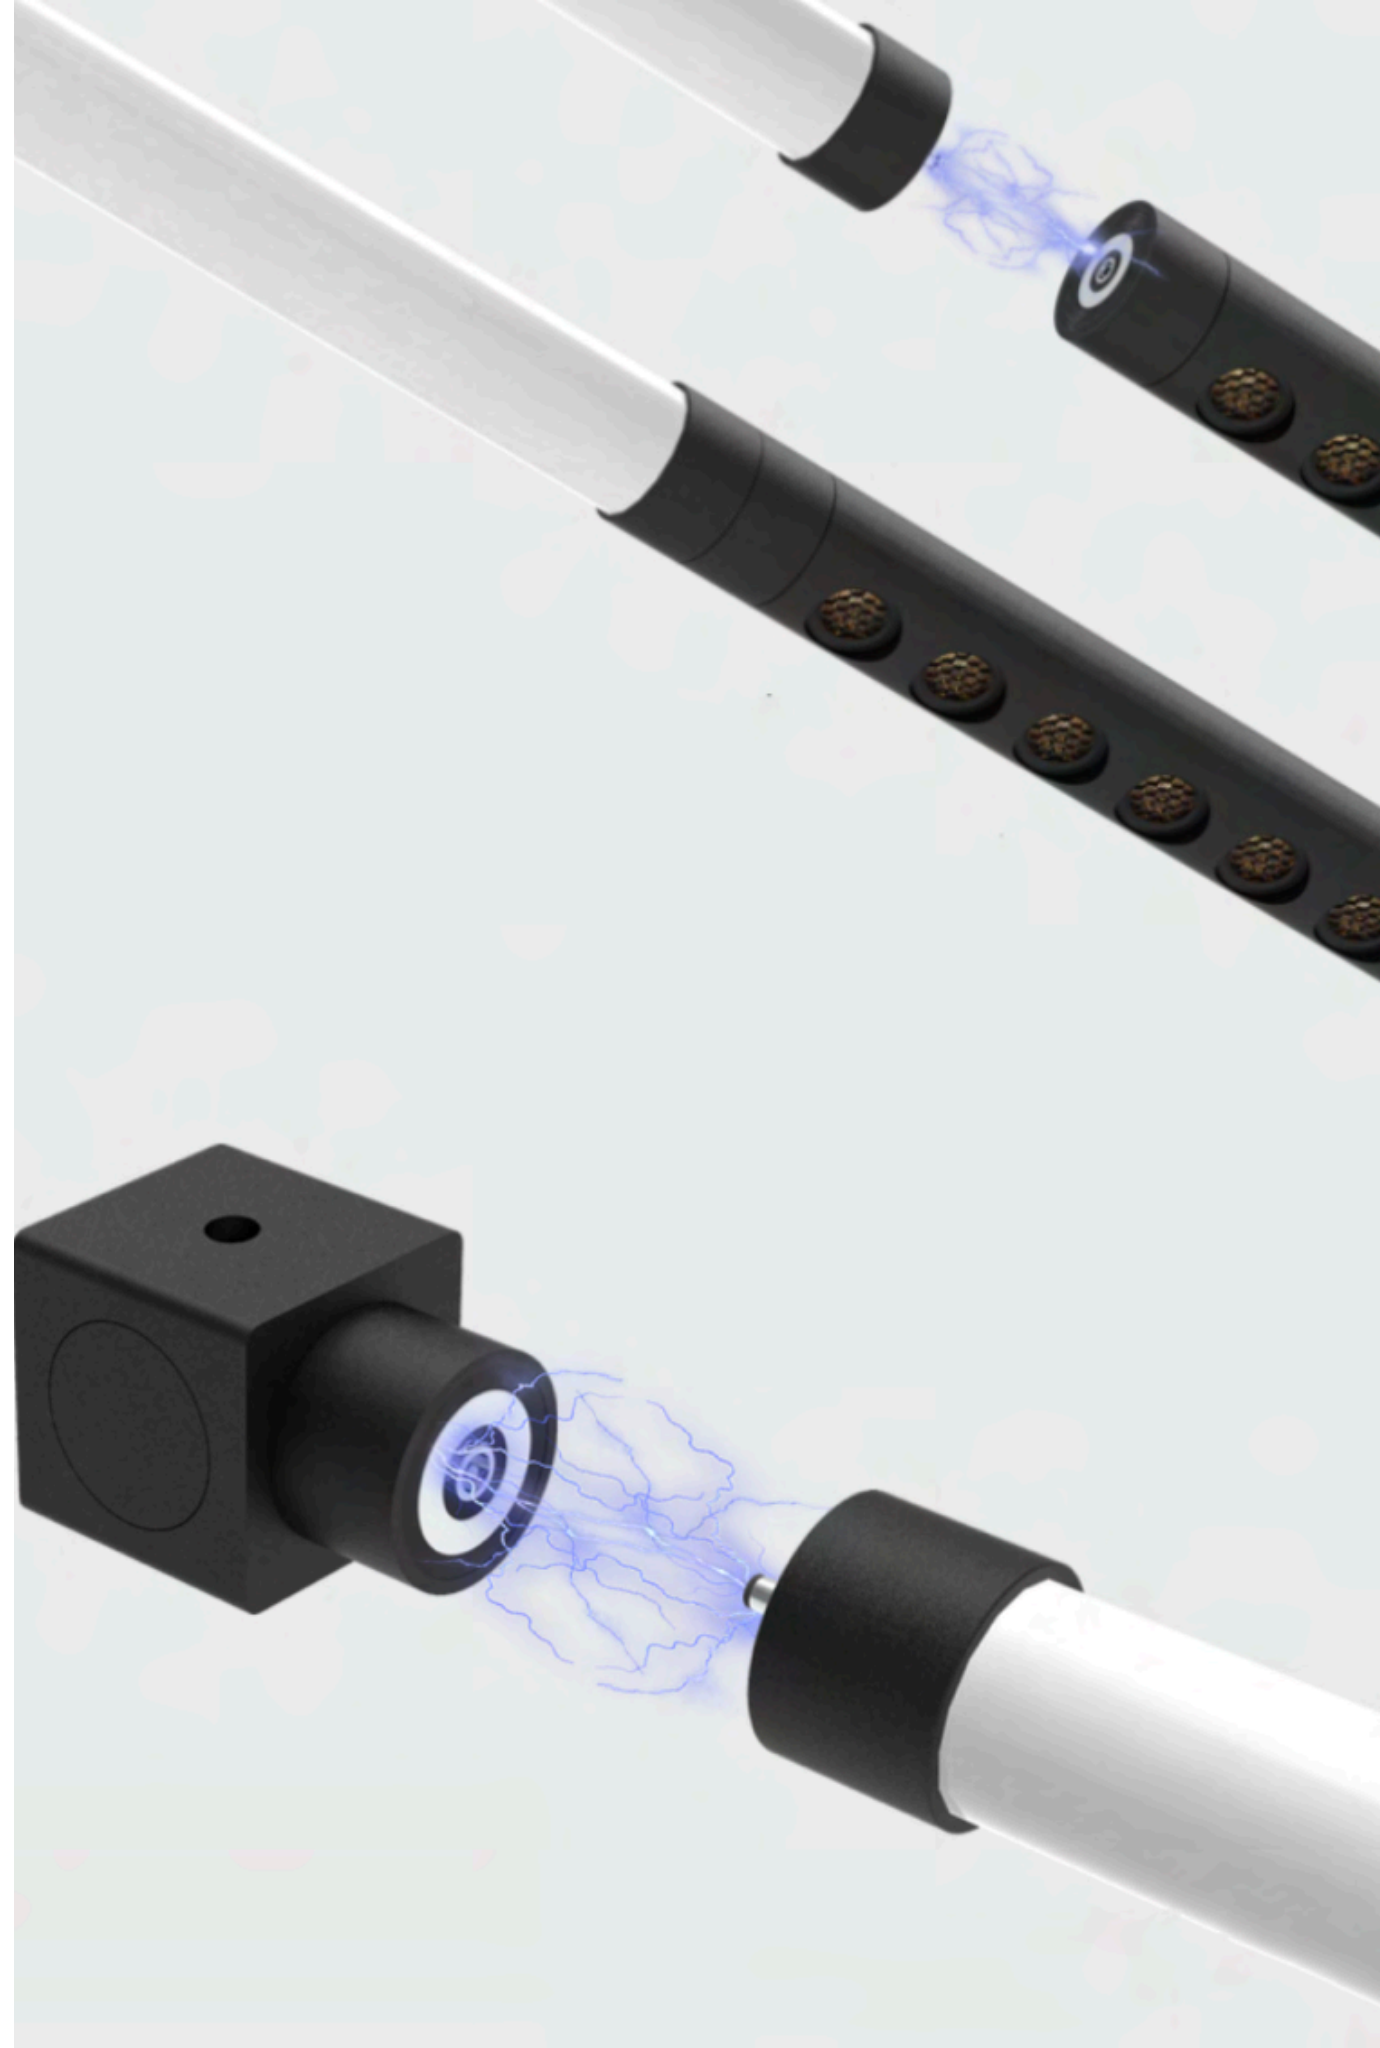



- Changeable shape
- Strong magnetic adsorption splicing, easy installation
- Reduce complicated wiring
- 360° light emission, uniform light emission, no spot light

D30mm



Item no.: CM-GS30D/L1000/13W
Lumen: 1103.49lm
Size: $\varnothing 30 \times L1000$ mm
DIM: YES
LEDs: Bridgelux
Voltage: DC24V
Power: 13W/M
CCT: 3000K/4000K/6000K/R/G/B
CRI: Ra90
Materials: Acrylic + High tensile silicone




Item no.: CM-GSD33/L134G/4W
Lumen: 403.76lm
Size: $\varnothing 33 \times L134$ mm
DIM: YES
LEDs: CREE
Voltage: DC24V
Power: 4W
CCT: 3000K/3500K/4000K
CRI: Ra90
Materials: 6063 Aluminum
Beam angle: 15°/24°/38°



Item no.: CM-GSD33/L210G/8W
Lumen: 405.79lm
Size: $\varnothing 33 \times L210$ mm
DIM: YES
LEDs: CREE
Voltage: DC24V
Power: 8W
CCT: 3000K/3500K/4000K
CRI: Ra90
Materials: 6063 Aluminum
Beam angle: 15°/24°/38°




D40mm

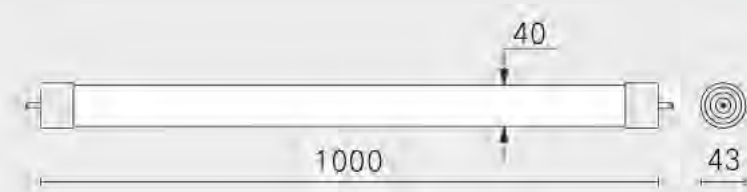

Item no.: CM-GS40D/L1000/16W
Lumen: 1228.51lm
Size: $\varnothing 40 \times L1000$ mm
DIM: YES
LEDs: Bridgelux
Voltage: DC24V
Power: 16W/M
CCT: 3000K/4000K/6000K/R/G/B
CRI: Ra90
Materials: Acrylic + High tensile silicone




Item no.: CM-GSD43/L171G/6W
Lumen: 405.79lm
Size: $\varnothing 43 \times L171$ mm
DIM: YES
LEDs: CREE
Voltage: DC24V
Power: 6W
CCT: 3000K/3500K/4000K
CRI: Ra90
Materials: 6063 Aluminum
Beam angle: 15°/24°/38°



Item no.: CM-GSD43/L282G/12W
Lumen: 484.94lm
Size: $\varnothing 43 \times L282$ mm
DIM: YES
LEDs: CREE
Voltage: DC24V
Power: 8W
CCT: 3000K/3500K/4000K
CRI: Ra90
Materials: 6063 Aluminum
Beam angle: 15°/24°/38°



D50mm

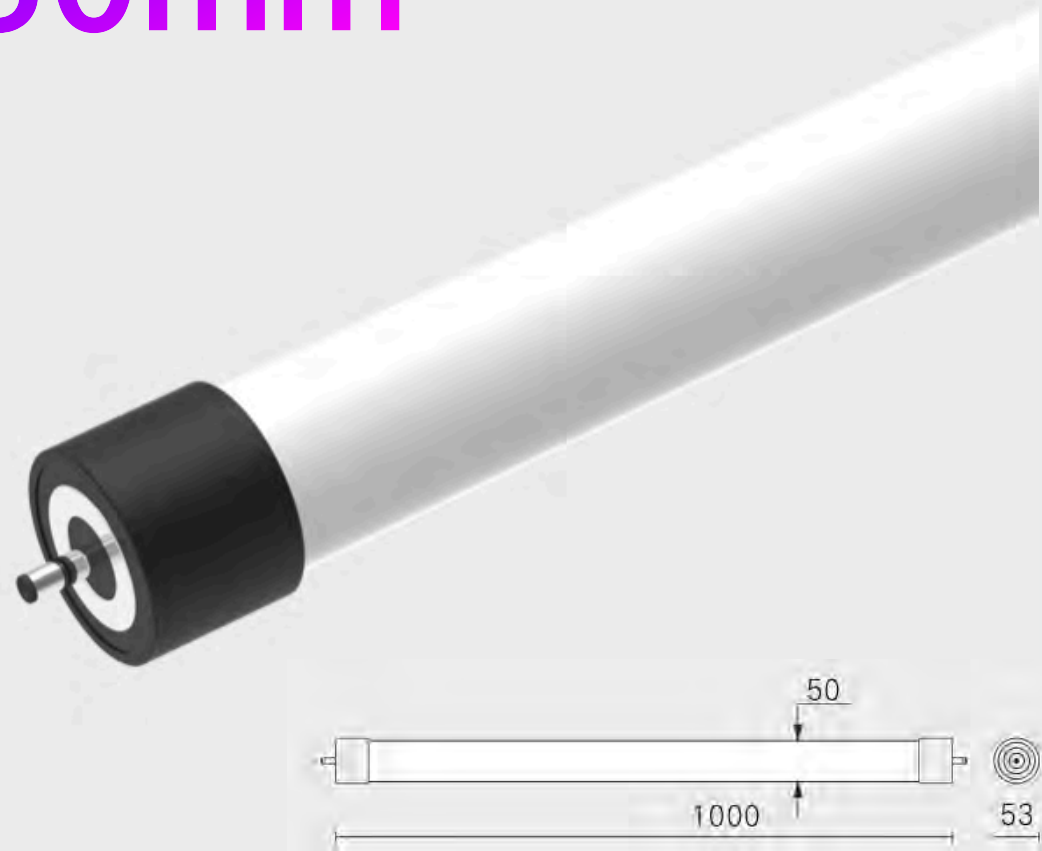

Item no.: CM-GS50D/L1000/18W
 Lumen: 1599.64lm
 Size: $\varnothing 50 \times L1000$ mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: DC24V
 Power: 18W/M
 CCT: 3000K/4000K/6000K/R/G/B
 CRI: Ra90
 Materials: Acrylic + High tensile silicone



Item no.: CM-GSD53/L196G/9W
 Lumen: 618.80lm
 Size: $\varnothing 53 \times L196$ mm
 DIM: YES
 LEDs: CREE
 Voltage: DC24V
 Power: 9W
 CCT: 3000K/3500K/4000K
 CRI: Ra90
 Materials: 6063 Aluminum
 Beam angle: 15°/24°/38°




Item no.: CM-GSD53/L333G/18W
 Lumen: 1214.60lm
 Size: $\varnothing 53 \times L333$ mm
 DIM: YES
 LEDs: CREE
 Voltage: DC24V
 Power: 18W
 CCT: 3000K/3500K/4000K
 CRI: Ra90
 Materials: 6063 Aluminum
 Beam angle: 15°/24°/38°




Magnetic Series

Free combination = Magnetic Spotlights + 360° Tube

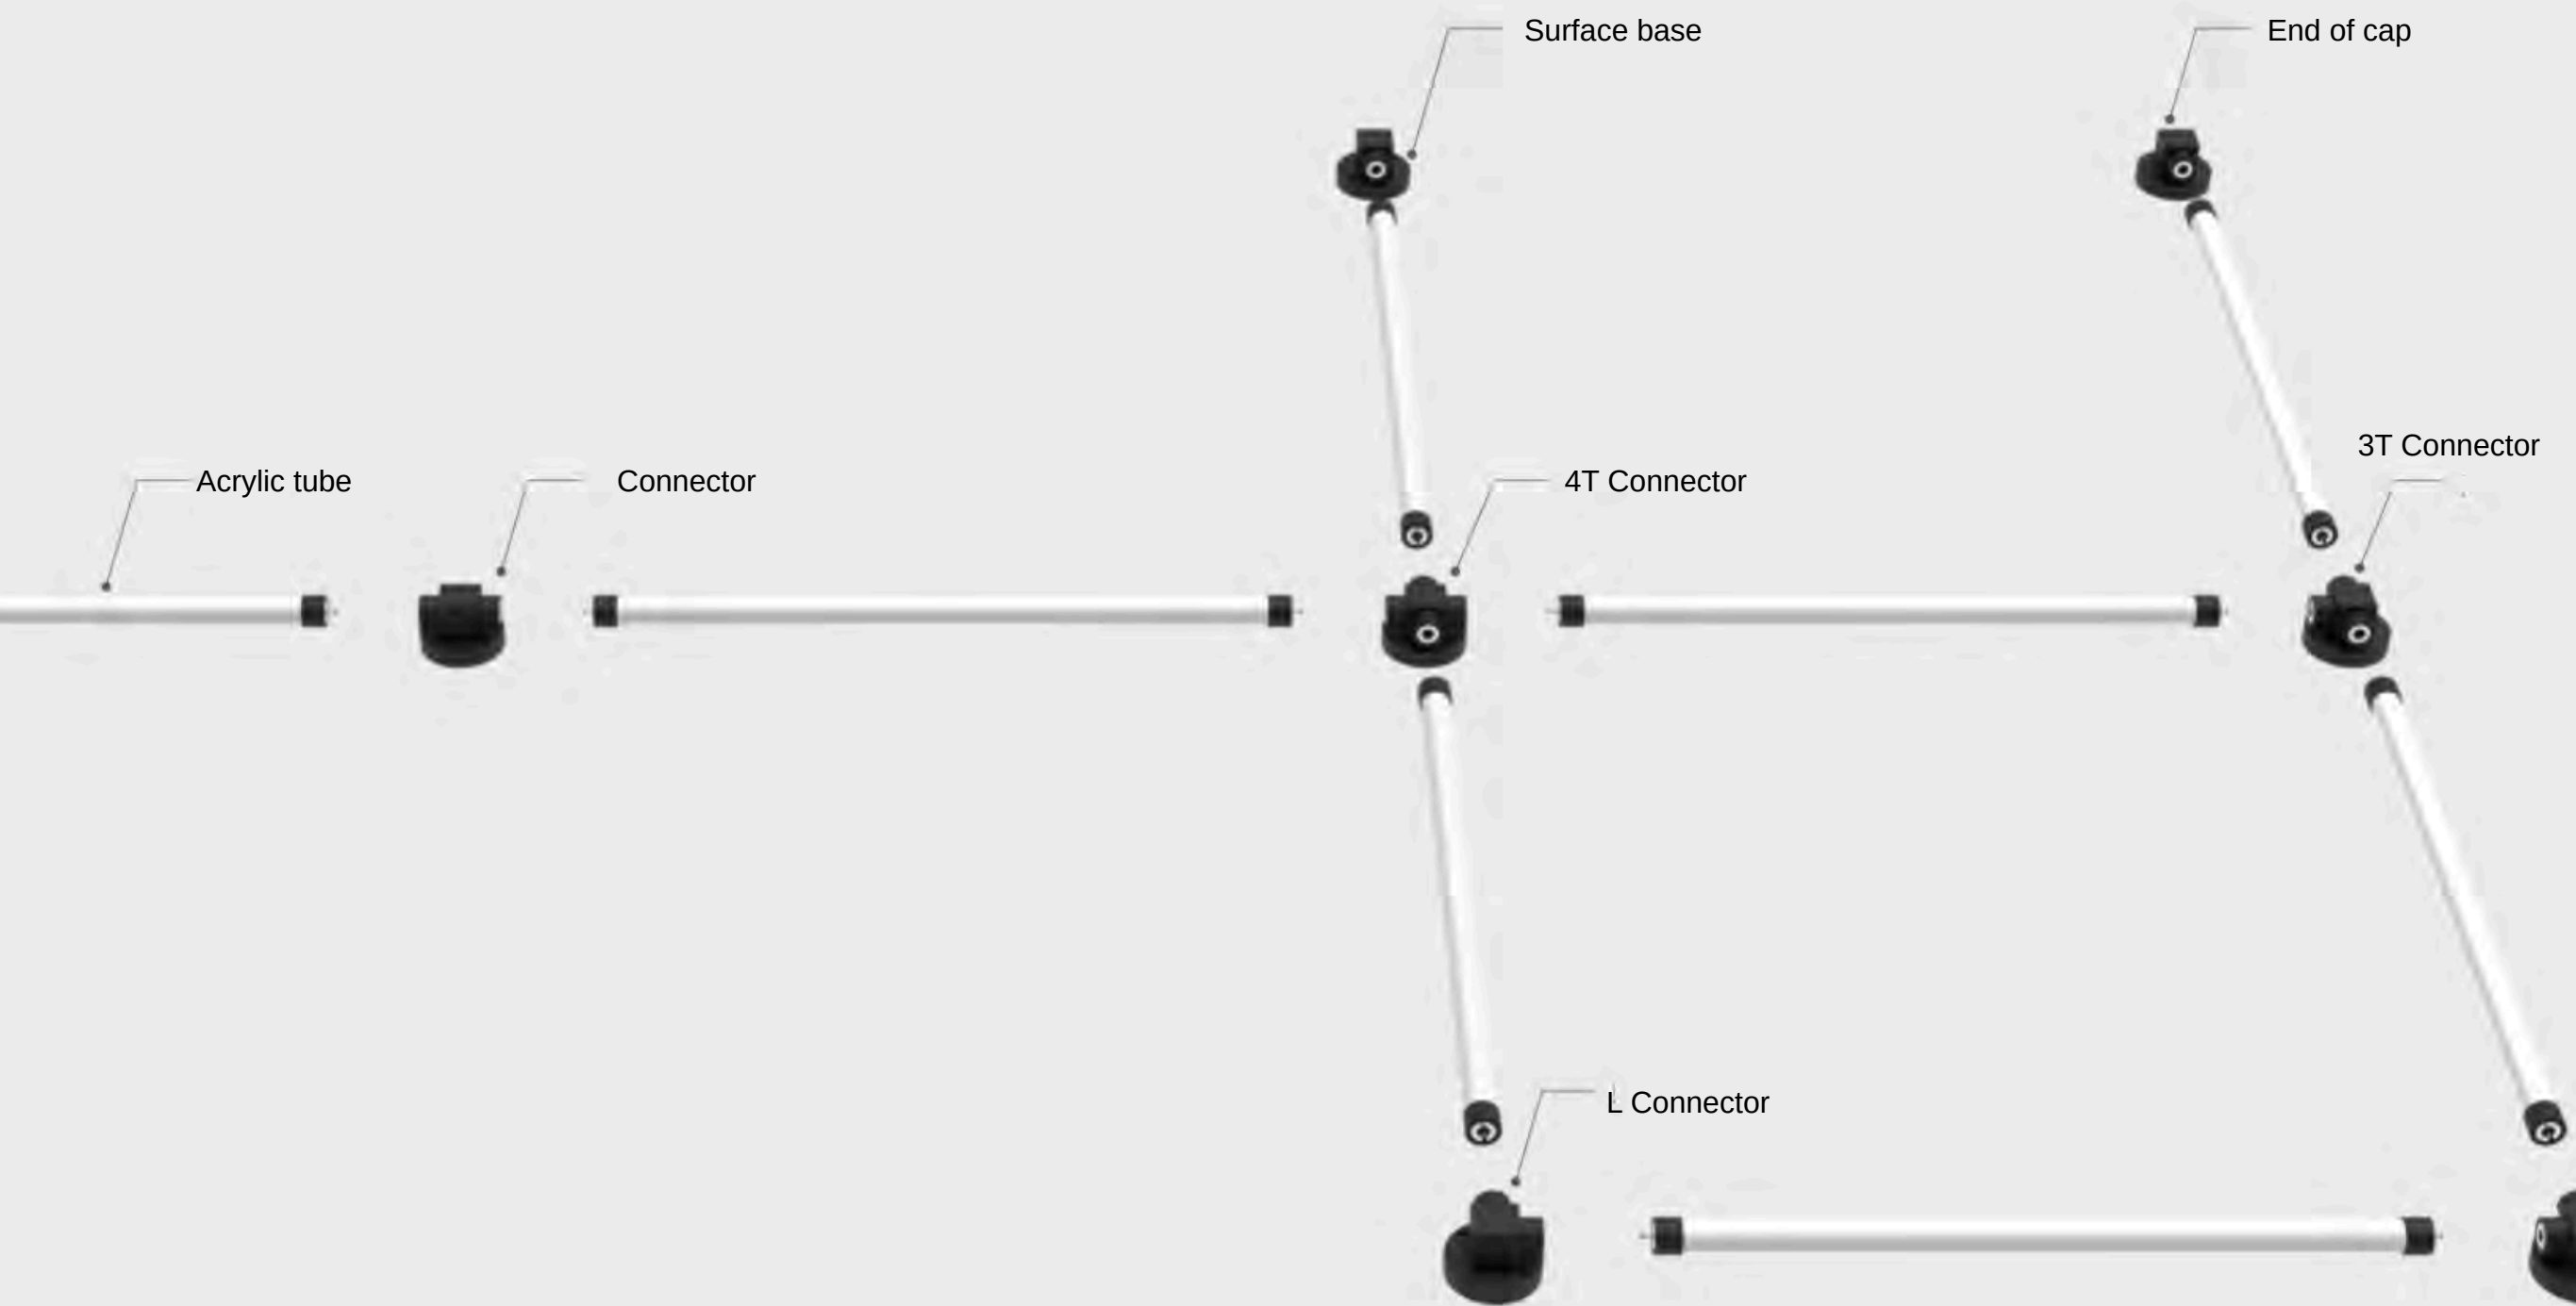


Magnetic Series Accessories


4T Connector

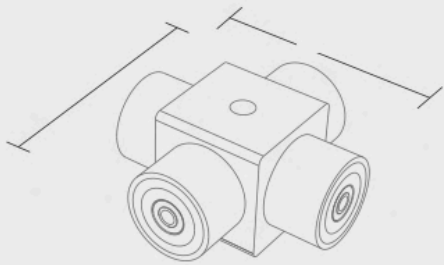

3T Connector

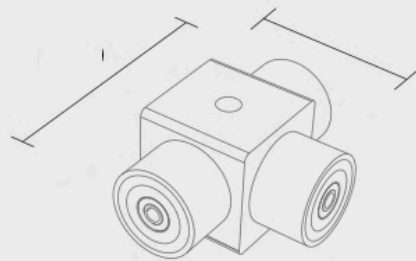


Straight Connector

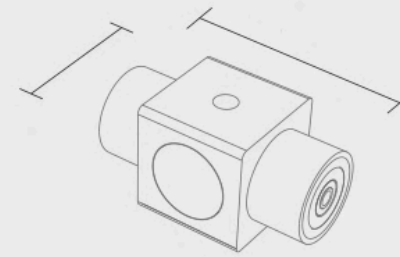


Suspended Mounted




L Connector

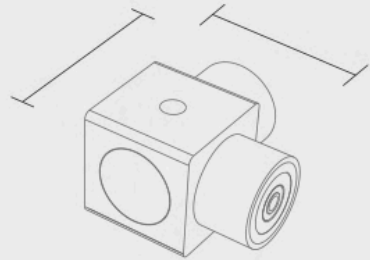


End of cap




Surface base

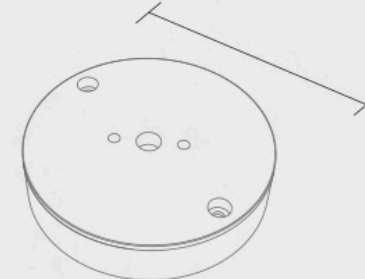


Surface Mounted




Round end of cap



6Heads Magnetic Spotlights

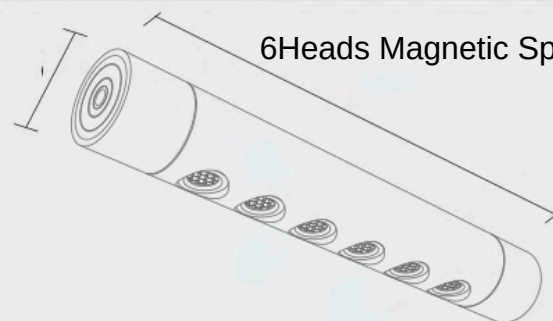

3Heads Magnetic Spotlights

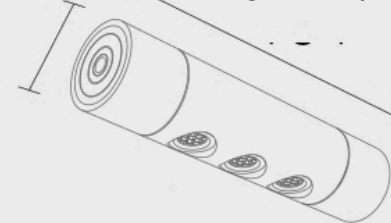

Wall Mounted






Rechargable Floor Lamp

L800/1000/1200/
1800mm



Touch switch, easy to use
No sound
No alarm
Light touch
Long press to adjust

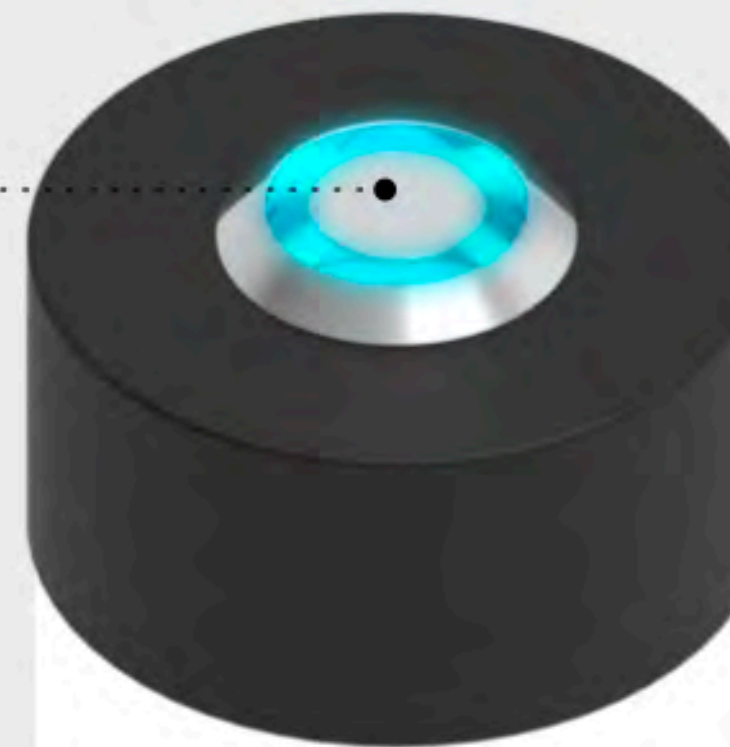


100%

70%

50%

30%

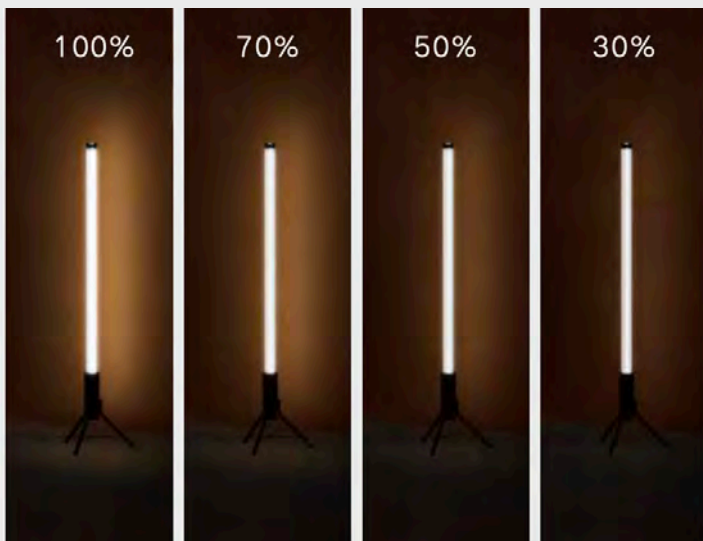

300x260mm



245x220mm



250x250mm




Ø250mm




Tips:


Turn off the lamp when charging, the charging speed is faster (2.5 hours can be fully charged), and the indicator light on the charger will turn from red to green after fully charged; if it is on, it will always be red (including fully charged).

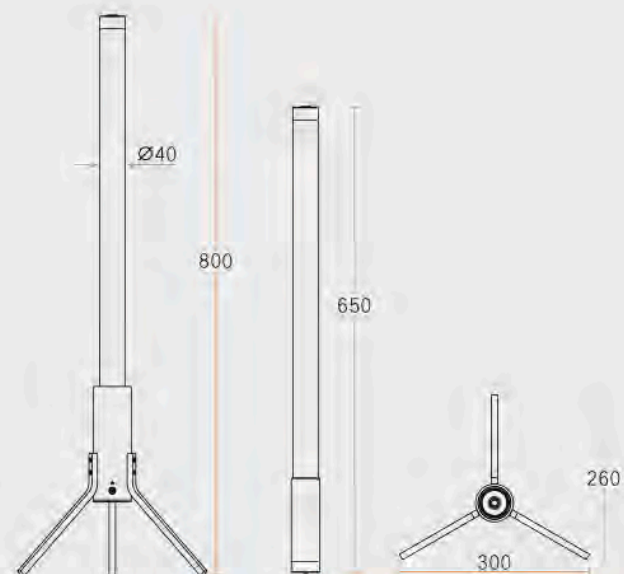


Item no.: CM-LDD300260/800/8W
 Size: 300*260*H800mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: AC100-240V Rechargeable
 Power: 8W
 CCT: 3000K/4000K/6000K/R/G/B/RGB
 CRI:Ra90
 Materials: Acrylic + High tensile silicone
 Battery capacity: 2100ma
 Battery life: 280 minutes

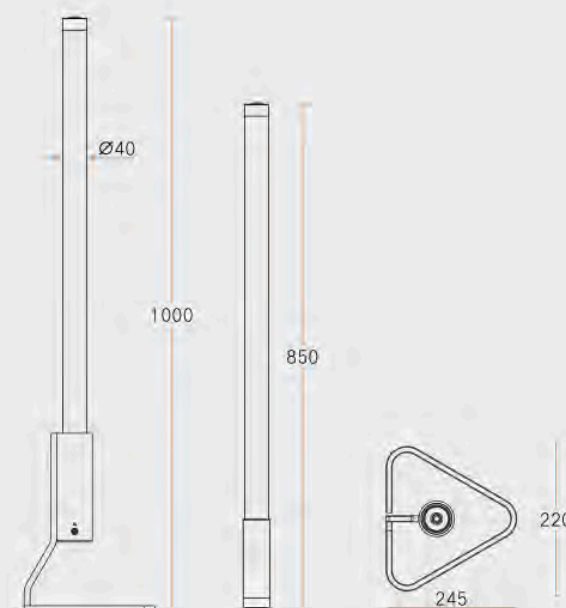

Item no.: CM-LDD245220/1000/12W
 Size: 245*220*H1000mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: AC100-240V Rechargeable
 Power: 12W
 CCT: 3000K/4000K/6000K/R/G/B/RGB
 CRI:Ra90
 Materials: Acrylic + High tensile silicone
 Battery capacity: 2100ma
 Battery life: 200 minutes

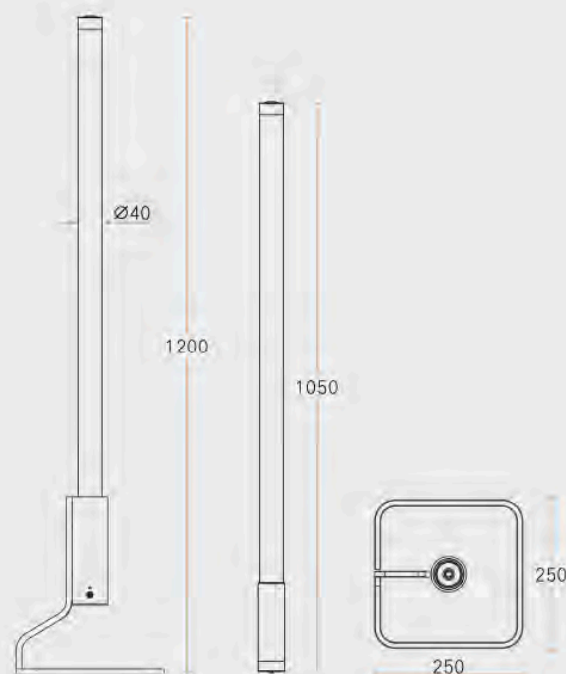

Item no.: CM-LDD250250/1200/16W
 Size: 250*250*H1200mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: AC100-240V Rechargeable
 Power: 16W
 CCT: 3000K/4000K/6000K/R/G/B/RGB
 CRI:Ra90
 Materials: Acrylic + High tensile silicone
 Battery capacity: 2100ma
 Battery life: 160 minutes

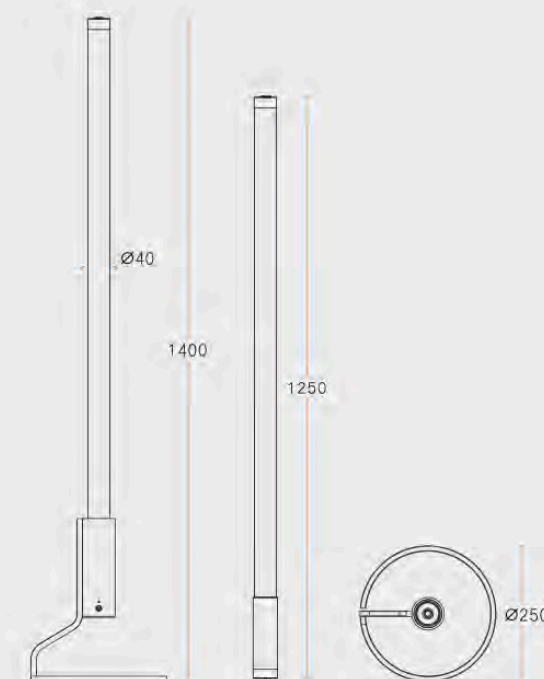

Item no.: CM-LDD250/1400/18W
 Size: Ø250*H1400mm
 DIM: YES
 LEDs: Bridgelux
 Voltage: AC100-240V Rechargeable
 Power: 18W
 CCT: 3000K/4000K/6000K/R/G/B/RGB
 CRI:Ra90
 Materials: Acrylic + High tensile silicone
 Battery capacity: 2100ma
 Battery life: 140 minutes





COMLED

COMLED
Victoria & Queensland.

www.comled.com.au
duncan@comled.com.au